

Edition/Izdanje
2026



Product catalogue/Katalog

Customer Tailored Solutions in Agriculture

Poljoprivredni program prema zahtevu kupca



CATALOGUE

KATALOG

Edition 2026.

Izdanje 2026.

Copyright © 2026 FKL. All rights reserved.

These contents are the copyright of the publisher and may not be reproduced, in total or partially, without express consent of the publisher. Every precaution has been taken to ensure the accuracy of the information contained in this publication; however, no liability can be accepted for any errors or omissions arising out of the use of the information contained herein. Specifications and technical data are subject to change without prior notice. For the latest and most accurate information, please consult the manufacturer directly.
Prepared by FKL DOO Temerin, Serbia
Editors in Chief: Ljiljana Marić and Dejan Zrilić
Copy Editor: Biljana Obrenović, Jovan Tomić, Nina Đaković, Milan Mijušković and Rade Stanivuk
Photos, Layout and Prepress: Monja Madić and Oleg Vorobev
Print: MAXIMA GRAF, June 2026.

Autorska prava © 2026 FKL. Sva prava zadržana.

Sadržaj ove publikacije je je zaštićen autorskim pravima izdavača i ne sme se reprodukovati, u celini ili delimično, bez izričite saglasnosti izdavača. Uloženi su svi naponi kako bi se obezbedila tačnost informacija sadržanih u ovoj publikaciji; međutim, ne prihvata se odgovornost za eventualne greške ili propuste koji mogu proizaći iz korišćenja ovde navedenih informacija.
Specifikacije i tehnički podaci mogu biti izmenjeni bez prethodne najave. Za najnovije i najtačnije informacije, molimo da se direktno obratite proizvođaču.
Pripremljeno u FKL DOO Temerin, Srbija
Glavni urednici: Ljiljana Marić i Dejan Zrilić
Tehnički urednici: Biljana Obrenović, Jovan Tomić, Nina Đaković, Milan Mijušković i Rade Stanivuk
Grafičko uređenje i priprema za štampu: Monja Madić i Oleg Vorobev
Štampa: MAXIMA GRAF, Jun 2026.



Your partner for

Providing the Best Solutions



AGRO POINT HUBS

AGRO POINT GLAVČINE

- IL20
- 11 IL20S
- 12 IL25
- 13 IL30
- 14 IL35
- 15 IL40
- 16 IL40 M
- 17 IL50
- 18 IL50 without shaft
IL50V
- 19 IL50 M
- 20 IL50 with solid forged holder
- 21 IL50S
- 22 IL50A
- 23 IL50A without shaft
- 24 IL50B
- 25 IL60
- 26 IL60 with special design
- 27 IL60 without shaft
- 28 Adaptable IL60 for disc angle change
IL60C
- 29 IL70

Disc Harrow Solutions

Ležajevi i lež. jedinice tanjirače

- 32 PL-127-G
PL-140
- 33 PL-185-M30-R+M30x1.5-RH(LH)
PL-185-155/5H-M30x1.5-RH(LH)
- 34 BW1-306037
306230
357234A
- 35 3305 B.2RS
3306 2RS
3206 B.2RS1
3307 B.2RS1
3209 NPPB.AH02
- 36 GWST 209PPB13
GWST 211PPB20
GWST 209 2TD
GWST 209-30 2TD
GWST 211-40.5 2TD
- 37 GWST 209PPB12 *ZN
GWST 209PPB39
GWST 209PPB40
GWST 211PPB15
GWST 211PPB15.H

- 37 GWST 209PPB29
GWST 209PPB32
GWST 211PPB40
GWST 211PPB40.X2

- 38 GW 209PPB12
GW 209PPB30
GW 211PP202

- 39 GW 211PPB3
GW 211PPB20
GW 211PP25

- 40 GWR 209PPB30
GWR 211PPB21

- 41 SBX 1227
W208KPP53
W 208PPB16
W 208PP16

- 42 GWHG 211PP25
GWHGR 211PP202
GWHGR 211-2TD-35

Seeding Machine Solutions

Ležajevi i lež. jedinice sejačice

- 44 VP-16/40/74,5
VP-M20x1.5/40/72-R (L)

- 45 885152
885154B.1

- 46 3204 B.2RS1
3205 B.2RS1
3210 A 2RS
3204 T

- 47 SL 3204 TRS
5206 KPP3
XS 5203.B-2T

- 48 06C04-TS
06C04-2Z
06C04-DS
6204-RSL3

- 49 SL 3303 2S
SL 3303-2S-20
SL 5203.B-2T
SL 5203.B-2T-A
SL 5203.B 2TQ
SL 5203/17.B-2T
SL 5203 TS

- 50 SL 5204 2D
SL 5205 2D
SL 5204 TS
SL 5204-ST
SL 5204 2T.C28
SL 5204/16.25-2T
SL 5204/20-2T
SL2 5203.B-2T
SL3 5203 2T

- 51 SL 53-014-2T
SL 5316 2T
- 52 SLE 47-16S-2RS
SLE 53-012-2T
SLU 53-012-2T
- 53 206KPP16
205KRP2
- 54 203KRR.AH02
203KPP.AH02
203KRR.AH05
203KPP.AH05
Q 203PP.AH02
Q 203PP.AH05
Q 203PP-CC.AH05
- 55 204KRR
203KRR
- 56 PL-7516-SM
PL-7517
PL-7517-SM
PL-7420-SM
PL-7520
PL-7520-SM
PL90-73/6H-B16

Packer Roller Solutions

Ležajevi i lež. jedinice valjka

- 58 LSQFR 308 TQT.H.T
LSQFR 308-13.5 TQT.H.T
LSQFR 308 2TD.H.T
LSQFR 309 TQT.H.T
LSQFR 309-16 TQT.H.T
- 59 ZGKU 208 2S
ZGKU 309 2S
- 60 LSGR 205 FS
LSGR 207 TBS
- 61 LSNN 208 TDT.H.T*K
LSNR 205 2T
LSNR 207 TBS
LENN 206 2TC.H
LENN 208 2T
LENN 210 2T
- 62 ARMOR Bearing Unit
- 63 LEFPN 208 TDT.C43.7
LSFPN 210 TDT.C38.C3
- 64 LSQFH 210 2PB.H.40
LSQFH 210 2PB.H
- 65 LESQFS 212 2TD.H
- 66 LEFN 210 2TB
LEFN 212 2TB
LEFN 212M 2TB

- 67 LEF 205 2TC
LSFN 207 TBS
LEFN 207 2TC
LEFN 208 2TC
LEFN 210 2PC
LEFC 210 2PB

Packer baler, mowers and spreaders


Ležajevi balirke, kosačice i rasipača

- 70 206KRR6, 207KRRB12, 207KRRB17,
209KRRB2, 210RRB6
205PP13, 205PPB13, 205KPPB2, 206KPP3
207KPPB3, 209KPPB2
- 71 LR 35x18x49-19
LR-35/72
SL 15/40/14.4 2RS
- 72 BW1-357233
BW1-457523
- 73 SLE 206-103 2F
SL 6209.N


Combine Harvester Solutions


Ležajevi i lež. jedinice kombajna

- 75 SL 40/90/36.5
209 KRR K/50.135
309726
- 76 G207 KPP3 AH16
LR 35/72/17/25-2T
SLQ 47x17.6x20.9-2D
- 77 W215KPP52
W312KPP51
6208.N2.C3
- 78 LY
- 79 UY
- 80 204KRRB2, 204KRR2, 205KRRB2,
205KRR2, 206KRRB6, 207KRR, 207KRRB9
207KPPB31.C25
- 81 Bearing Units with GS type housing
- 82 FKL Distributors / FKL Distributeri

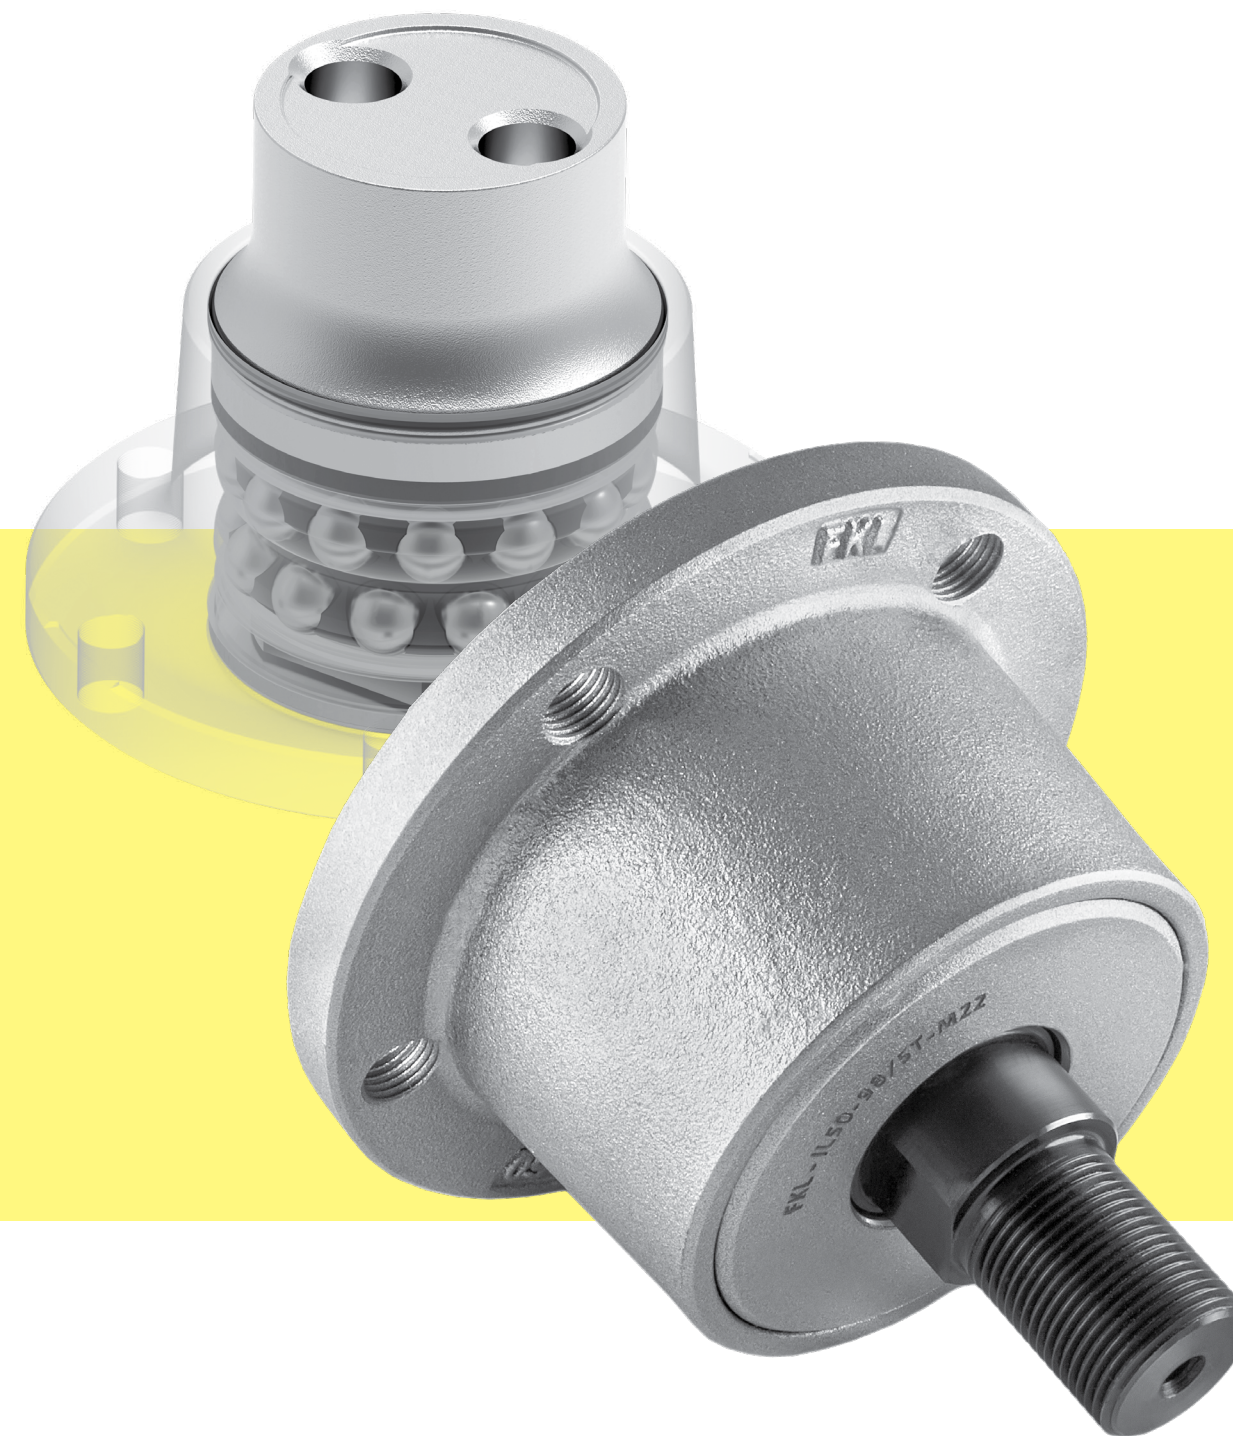


AGRO POINT HUBS **AGRO POINT GLAVČINE**

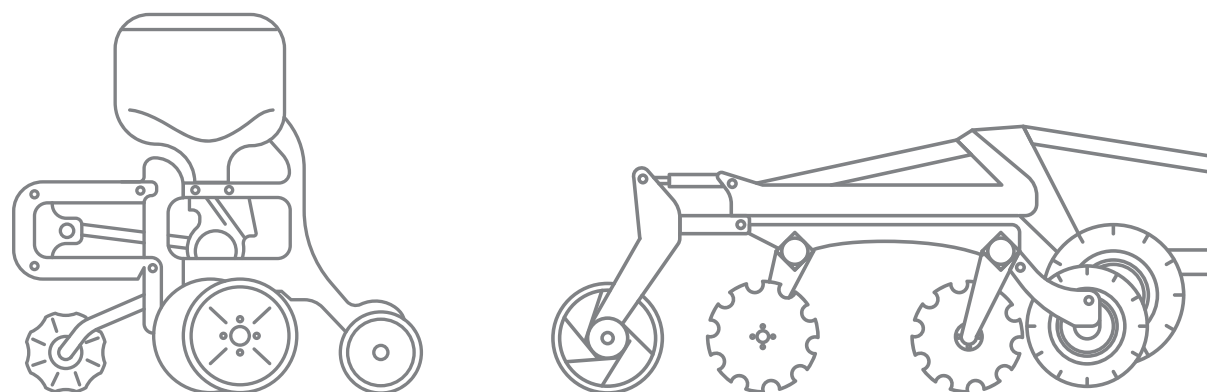



AGRO POINT HUB

AGRO POINT GLAVČINA

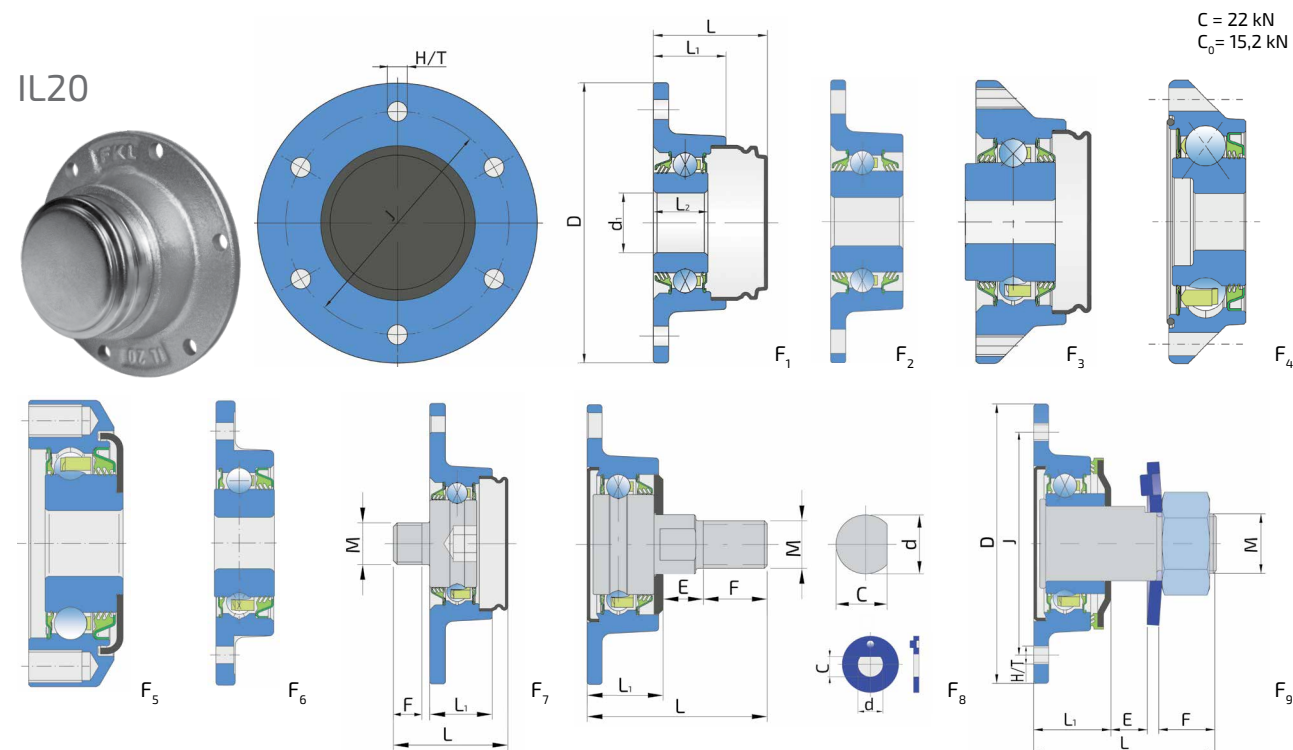

F8 type is also available with special locking washer
F8 dostupno sa specijalnom zaustavnom podloškom

Designation/Oznaka	J	D	H/T	d	C	d ₁	M	L	L ₁	L ₂	E	F	kg	Fig./Sl.
IL20-60/6T-B16-ZP	60	70	6xM8	-	-	16	-	23	20.8	19	-	-	0.45	5
IL20-70/6H-74/2T-B16	70	89	6x5.4	-	-	16.053	-	18	18	18.669	-	-	0.43	6
IL20-70/6T-B12	70	80	6xM6	-	-	12.2	-	32.5	25.5	25.5	-	-	0.59	3
IL20/305-70/6T-B16 *	70	81	6xM8	-	-	16.2	-	22	22	21	-	-	0.45	4
IL20-71/6T-B16	71	81	6xM8	-	-	16.03	-	25.5	-	22.5	-	-	0.51	2
IL20-73/6H-B16	73.5	94	6x6.4	-	-	16	-	40.7	24	27	-	-	0.75	1
IL20-74/6H-B20	74	94	6x9	-	-	20	-	37.7	24	18	-	-	0.48	1
IL20-75/4H-M20x1.5-T-44	75	94	4x8.5	25	23	-	M20x1.5	61	26	-	15	20	0.77	9
IL20-75/6H-B16	75	94	6x6.4	-	-	16	-	37.7	24	18	-	-	0.50	1
IL20-75/6H-B17	75	94	6x6.4	-	-	17	-	37.7	24	18	-	-	0.50	1
IL20-75/6T-B17	75	94	6xM8	-	-	17	-	37.7	24	18	-	-	0.50	1
IL20-75/6H-B17+GK **	75	94	6x6.4	-	-	17	-	37.7	24	18	-	-	0.75	1
IL20-75/6H-B20	75	94	6x6.4	-	-	20	-	37.7	24	18	-	-	0.50	1
IL20-75/6T-M20x1.5-T-44	75	94	6xM6	25	23	-	M20x1.5	61	26	-	15	20	0.77	9
IL20-79/6H-B16	79.4	94	6x8.1	-	-	16	-	24	-	24	-	-	0.50	2
IL20-80/5H-M16	80	94	5x8.5	20	18.5	-	M16	60.5	25.5	-	13.5	21.5	0.66	8
IL20-80/6H-B16	80	108	6x16	-	-	16	-	44.2	31.5	18	-	-	0.70	1
IL20-80/6H-M16	80	94	6x8.5	20	18.5	-	M16	60.5	25.5	-	13.5	21.5	0.59	8
IL20-80/6T-M16x2	80	94	6xM8x1.25	20	18.5	-	M16x2	71.6	38	-	12.4	21.2	0.73	8
IL20-82/5T-B16	82	108	5xM8	-	-	16.2	-	24	-	24	-	-	0.64	2
IL20-85/6H-B20	85	95	6x6.4	-	-	20	-	37.7	24	18	-	-	0.48	1
IL20-92/5H-M16-R	92	108	5x6.4	-	-	-	M16x1.5-R	51.7	24	-	-	14	0.67	7
IL20-92/5H-M16-L	92	108	5x6.4	-	-	-	M16x1.5-L	51.7	24	-	-	14	0.67	7

* C= 34.5 kN; Co=21.8 kN

** Complete Set/Kompletan set

Typical Applications:

Potencijalno mesto ugradnje i primena:

Seeding Machines


Sejačice

Note/Napomena


Metal protective cap is set by the user/Limenu zaštitnu kapu postavlja korisnik

AGRO POINT HUB

AGRO POINT GLAVČINA



IL20S

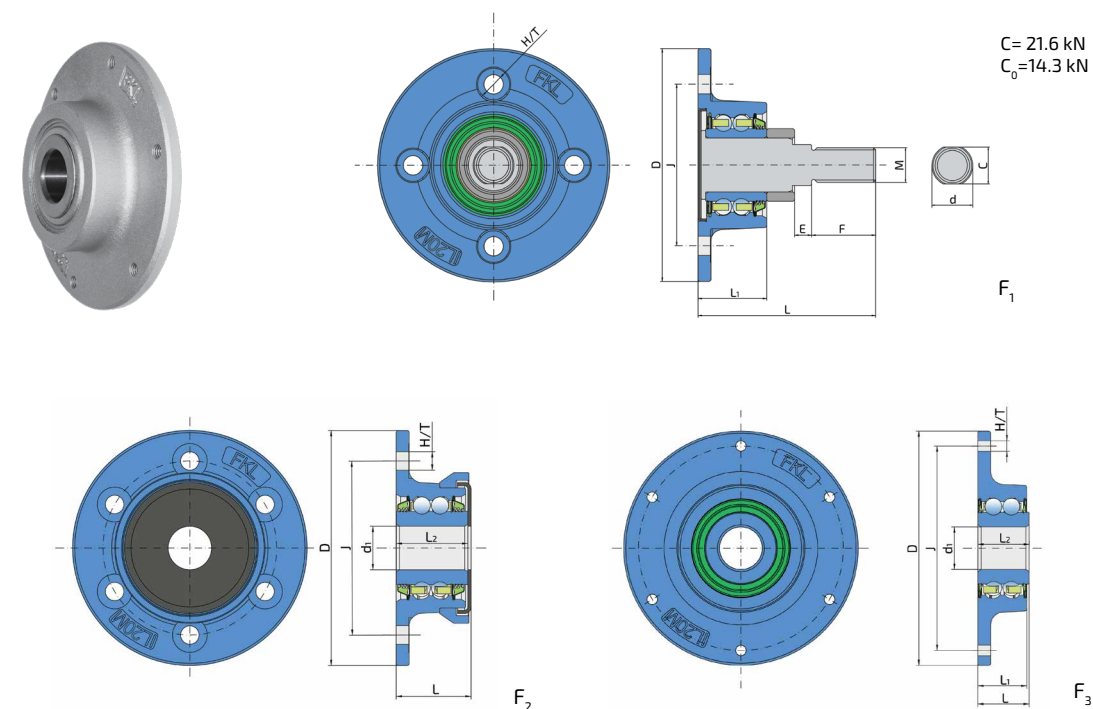

Designation/Oznaka	J	D	H/T	d	d ₁	C	M	L	L ₁	L ₂	E	F	kg	Fig./Sl.
IL20S-75/4H-M16	75	108	4x9	19	-	17	M16	82.8	32	-	8	29.8	0.97	1
IL20S-80/6H-B20	80	108	6x8.5	-	20	-	-	34.5	-	33	-	-	0.73	2
IL20S-96/6T-B20	96	110	6x6	-	20	-	-	24	23	24	-	-	0.67	3


* C= 22 kN; Co=15.2 kN

Typical Applications:

Potencijalno mesto ugradnje i primena:


Seeding Machines

Sejačice



AGRO POINT HUB AGRO POINT GLAVČINA

IL25

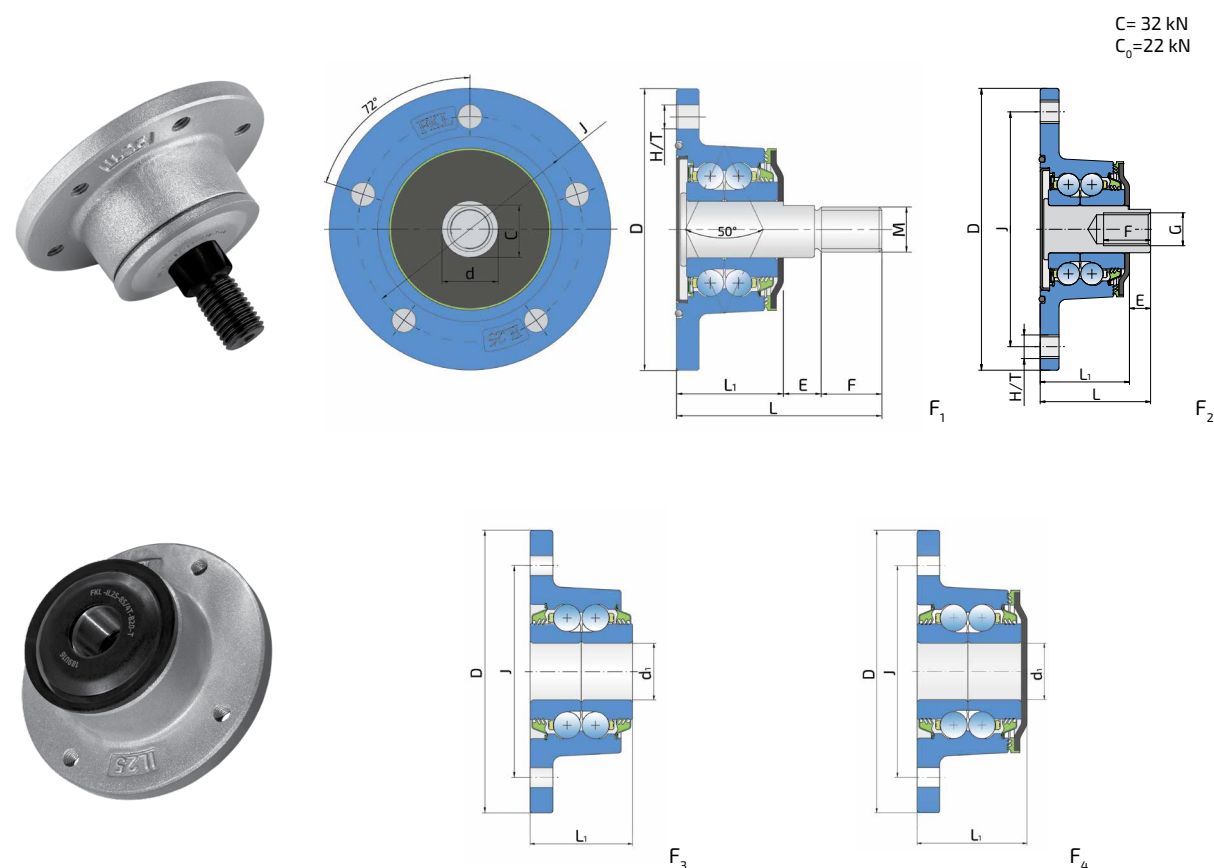


Designation/Oznaka	J	D	H/T	d	C	d _i	M	G	L	L ₁	E	F	kg	Fig./SL
IL25-75/6H-B20	75	100	6x7	-	-	20	-	-	-	36	-	-	0.78	3
IL25-75/6H-B20-T	75	100	6x7	-	-	20	-	-	-	39	-	-	0.78	4
IL25-80/5H-M16-T	80	100	5x8.5	20	18.5	-	M16	-	73	38	13.5	21.5	0.95	1
IL25-80/5T-M16-T	80	100	5xM8	20	18.5	-	M16	-	73	38	13.5	21.5	0.95	1
IL25-80/6T-M16-T	80	100	6xM8	20	18.5	-	M16	-	73	38	11	24	0.95	1
IL25-85/4T-B20-T	85	100	4xM8	-	-	20	-	-	-	39	-	-	0.78	4
IL25-85/4T-M16-T	85	100	4xM8	20	18.5	-	M16	-	73	38	13.5	21.5	0.94	1
IL25-100/6T-M14x1.5-T	100	120	6xM10	20	18.5	-	-	M14x1.5	47	38	9	20	1.10	2

Typical Applications:
Potencijalno mesto ugradnje i primena:

Finger weeders/Prstasti diskovi za uklanjanje korova
Seeding machines for No-till and Strip-till/Diskovi sejačica za "No-till" i "Strip-till" obradu
Coulter discs for seeding machines/Diskovi-raonici na sejačicama
Marker discs for ploughs and seeding machines/Diskovi obeleživači na plugovima i sejačicama

AGRO POINT HUB AGRO POINT GLAVČINA


IL30

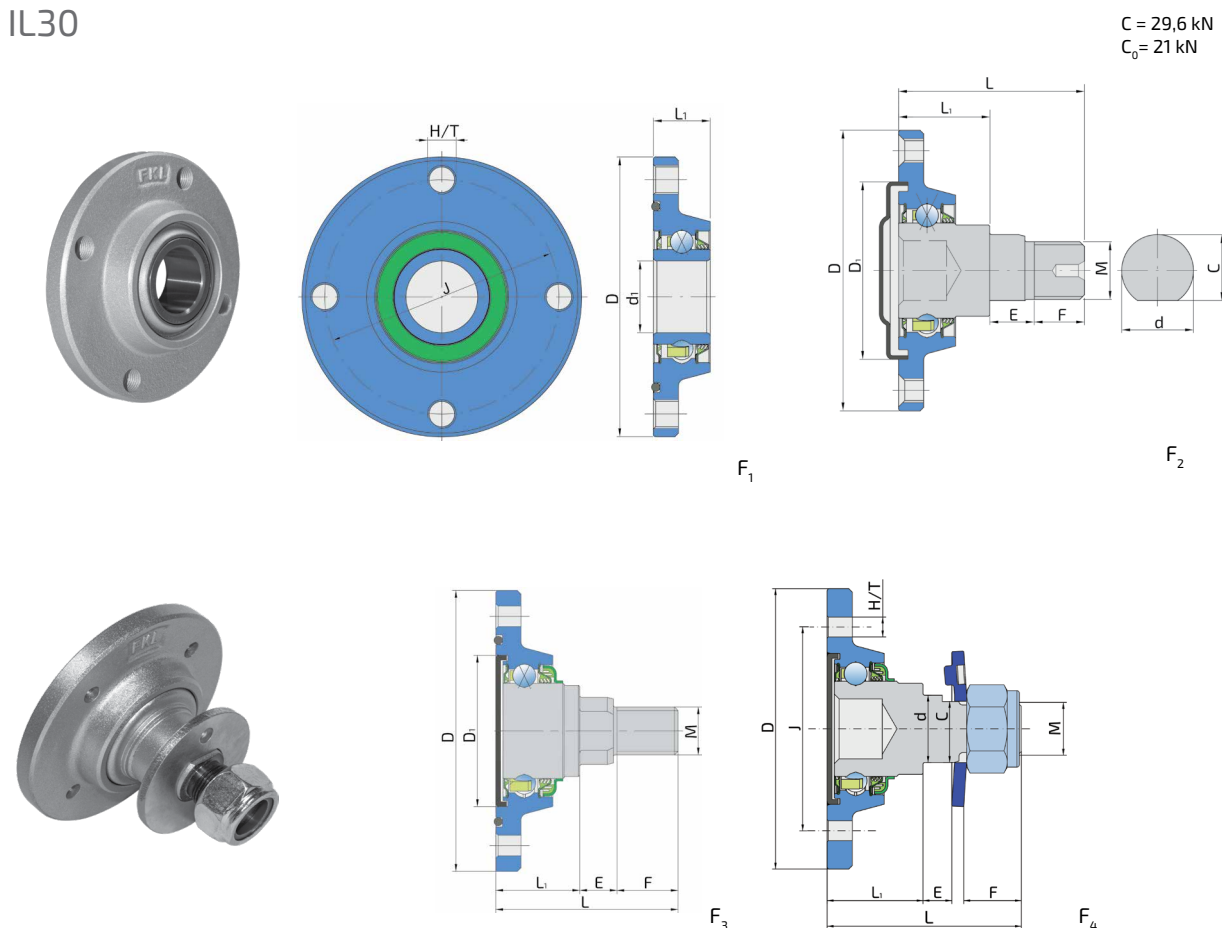


Designation/Oznaka	J	D	D _i	H/T	d	C	d _i	M	L	L ₁	E	F	kg	Fig./SL
IL30-85/4H-M22-04	85	117	63	4x8.3	28	25.4	-	M22x1.5	81	40	12	25	1.50	4
IL30-95/6H-M20	95.5	117	63	6x8.5	28	25.4	-	M20	76	35	15.5	25.5	1.21	3
IL30-98/4T-B30	98	117	-	4xM12x1.25	-	-	30	-	-	23.8	-	-	0.91	1
IL30-98/4T-M20	98	117	63	4xM8	20	17	-	M20	77	40	7	30	1.14	3
IL30-98/4H-B30	98	117	-	4x10	-	-	30	-	-	23.8	-	-	0.91	1
IL30-98/5T-B30	98	117	-	5xM12x1.5	-	-	30	-	-	24.8	-	-	0.93	1
IL30-100/4T-M24x2	100	117	74	4xM10	30	27.5	-	M24x2	89	42.3	18.7	28	1.51	2

Typical Applications:
Potencijalno mesto ugradnje i primena:

Seeding machines for No-till and Strip-till farming technology/Diskovi sejačica za "No-till" i "Strip-till" obradu
Coulter discs for seeding machines /Diskovi-raonici na sejačicama
Marker discs for ploughs/Diskovi obeleživači na plugovima







AGRO POINT HUB AGRO POINT GLAVČINA

IL35


AGRO POINT HUBS
AGRO POINT GLAVČINE

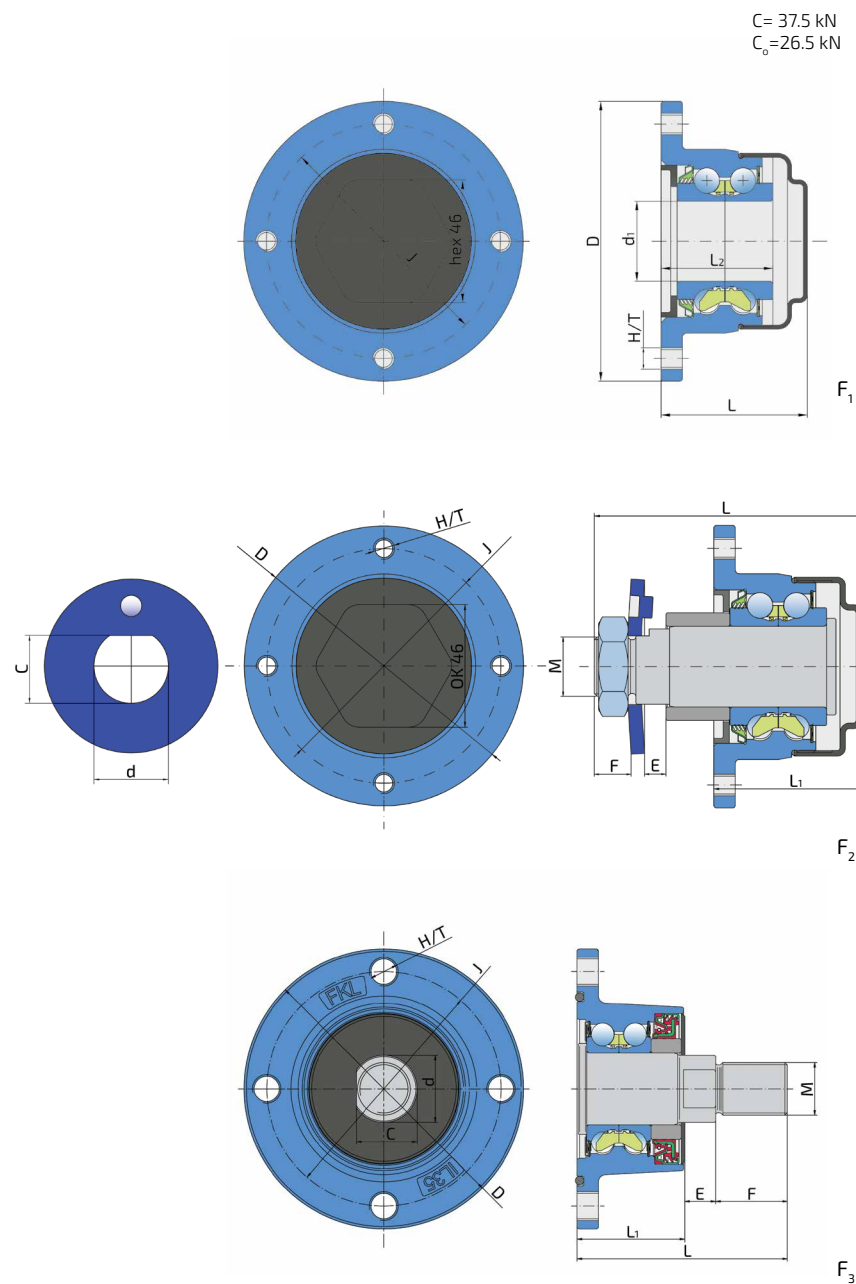

Designation/Oznaka	J	D	H/T	d	d ₁	C	M	L	L ₁	L ₂	E	F	kg	Fig./SL
IL35-88/4T-04	88	105	4x8x1.25	30	-	24.7	M22x1.5	108	55	-	8	13.5	1.75	2
IL35-88/4T-B30	88	105	4x8x1.25	-	30	-	-	55	-	42	-	-	1.05	1
IL35-98/4T-M22x1.5	98	117	4xM12x1.25	28	-	25.5	M22x1.5	88	45	-	13	30	1.65	3
IL35-100/6T-M24x2	100	117	6xM10	30	-	27.5	M24x2	91.5	45	-	14.5	32	1.69	3

Typical Applications:
Potencijalno mesto ugradnje i primena:



Seeding Machines and Manure Handling Machines
Sejačice i mašine za đubrenje



AGRO POINT HUB AGRO POINT GLAVČINA

IL40

AGRO POINT HUBS
AGRO POINT GLAVČINE

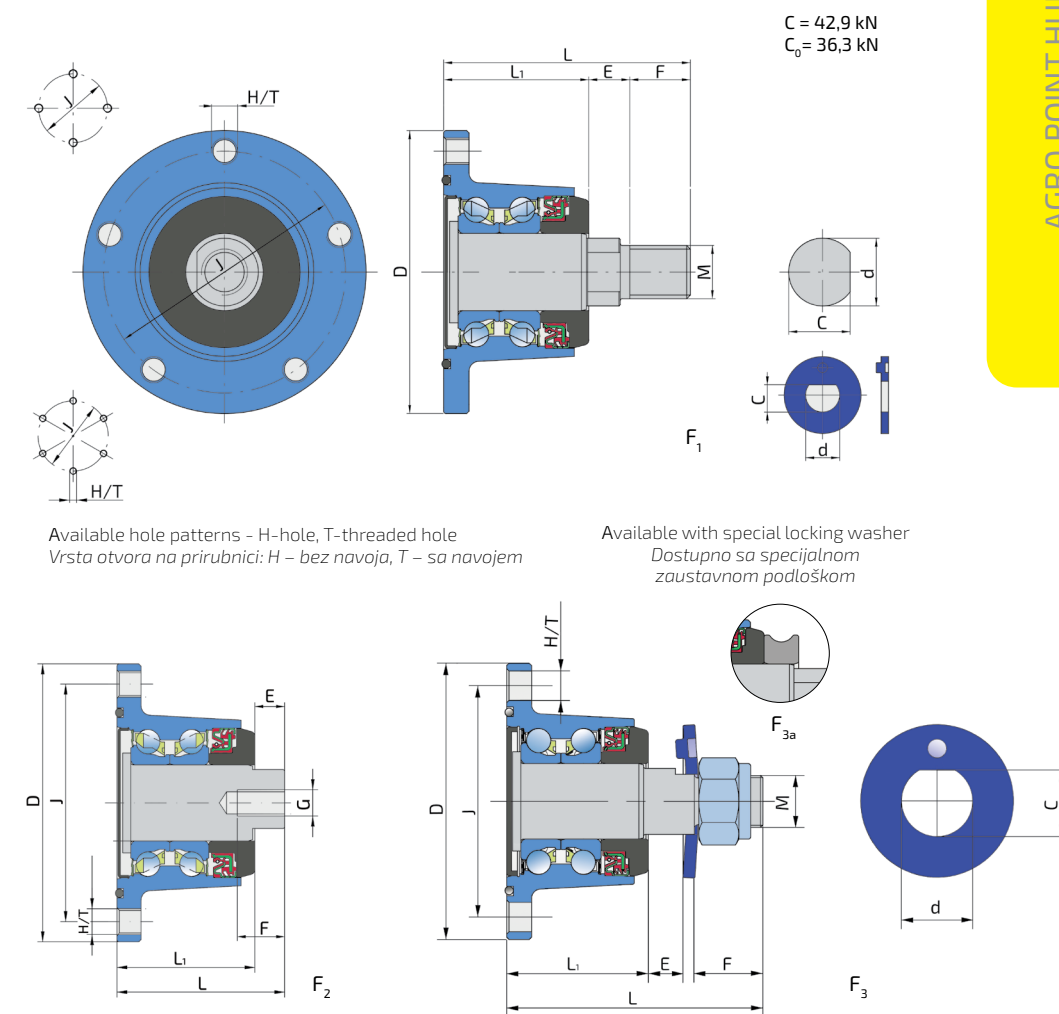

Designation/Oznaka	J	D	H/T	d	C	M	G	L	L ₁	E	F	kg	Fig./SL
IL40-98/4T-M22	98	117	4xM12x1.25	27.95	25.4	M22x1.5	-	102	60	17	25	2.16	1
IL40-98/4T-M22-117*	98	117	4xM12x1.25	27.95	25.4	M22x1.5	-	117	75	13	29	2.10	3a
IL40-98/4T-M22-X	98	117	4xM12x1.25	27.95	25.4	M22x1.5	-	102	60	15	27	2.10	1
IL40-98/4T-M24x2-44	98	117	4xM12x1.25	30	27.5	M24x2	-	106	60	10	31	2.38	3
IL40-98/5T-M22	98	117	5xM12x1.25	27.95	25.4	M22x1.5	-	102	60	17	25	2.16	1
IL40-98/6T-M22	98	117	6xM12x1.25	27.95	25.4	M22x1.5	-	102	60	17	25	2.16	1
IL40-98/4T-M24	98	117	4xM12x1.25	30	27.5	M24x2	-	106	60	17	29	2.16	1
IL40-98/5H-M22-04	98	117	5x12.5	27.95	25.4	M22x1.5	-	108.5	60	16	29	2.36	3
IL40-98/5T-M24	98	117	5xM12x1.25	30	27.5	M24x2	-	106	60	17	29	2.20	1
IL40-98/6T-M24	98	117	6xM12x1.25	30	27.5	M24x2	-	106	60	17	29	2.20	1
IL40-100/6T-M20x1.5	100	117	6xM10	34	31	-	M20x1.5	69	55	14	26	2.00	2

* With a disc spring washer DIN 6796 and nut DIN 934/Sa tanjraстом podložkom DIN 6796 i navrtkom DIN 934


Typical Applications:
Potencijalno mesto ugradnje i primena:

Disc Harrows, Bed Maker and Manure Handling Machines
Tanjirače, mašine za povrtarstvo i mašine za đubrenje

AGRO POINT HUB AGRO POINT GLAVČINA

IL40 M

C = 42,9 kN
C₀ = 36,3 kN

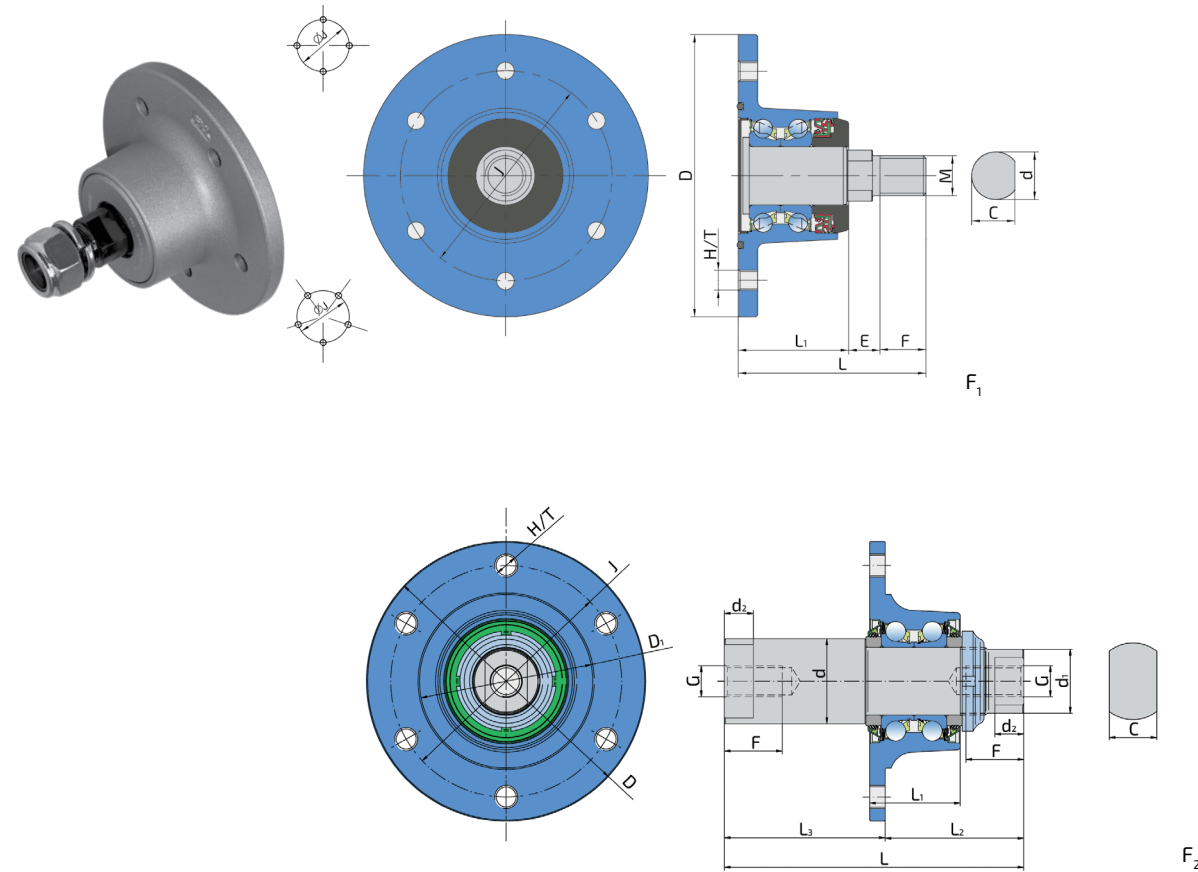

Designation/Oznaka	J	D	D ₁	H/T	d	d ₁	d ₂	C	M	G	L	L ₁	L ₂	L ₃	E	F	kg	Fig./Sl.
IL40-104/5T-M22x1.5-01	104	145	-	5xM12x1.25	27.95	-	-	25.4	M22x1.5	-	101	55	-	-	21	25	2.48	1
IL40-108/5T-M22x1.5	108	145	-	5xM12x1.25	27.95	-	-	25.4	M22x1.5	-	102	60	-	-	17	29	2.70	1
IL40-110/4H-M24x1.5	110	145	-	4x13	24	-	-	22.5	M24x1.5	-	129	74	-	-	20	35	2.81	1
IL40-110/4H-M30x2	110	145	-	4x13	34.9	-	-	32.4	M30x2	-	134	76	-	-	20	38	3.20	1
IL40-110/6H-M22x1.5	110	145	-	6x10.5	28	-	-	25.4	M22x1.5	-	110	60	-	-	17	33	2.62	1
IL40-112/5T-M24x2	112	145	-	5xM12x1.5	30	-	-	28	M24x2	-	101	55	-	-	21	25	2.48	1
IL40-115/5H-M22x1.5	115	145	-	5x13	28	-	-	25.5	M22x1.5	-	101	55	-	-	18	28	2.48	1
IL40-120/4H-M22x1.5	120	145	-	4x11	28	-	-	25.4	M22x1.5	-	110	60	-	-	17	33	2.79	1
IL40-120/6T-2xM16	120	145	90	6xM12x1.25	44	33	15	2x22	-	M16x1.5	155.5	47	72	83.5	-	30	3.08	2


Typical Applications:
Potencijalno mesto ugradnje i primena:

Disc Harrows, Seeding Machines and Manure Handling Machines
Tanjirače, sejačice i mašine za đubrenje

AGRO POINT HUB AGRO POINT GLAVČINA

IL50

C = 60 kN
C₀ = 45.8 kN

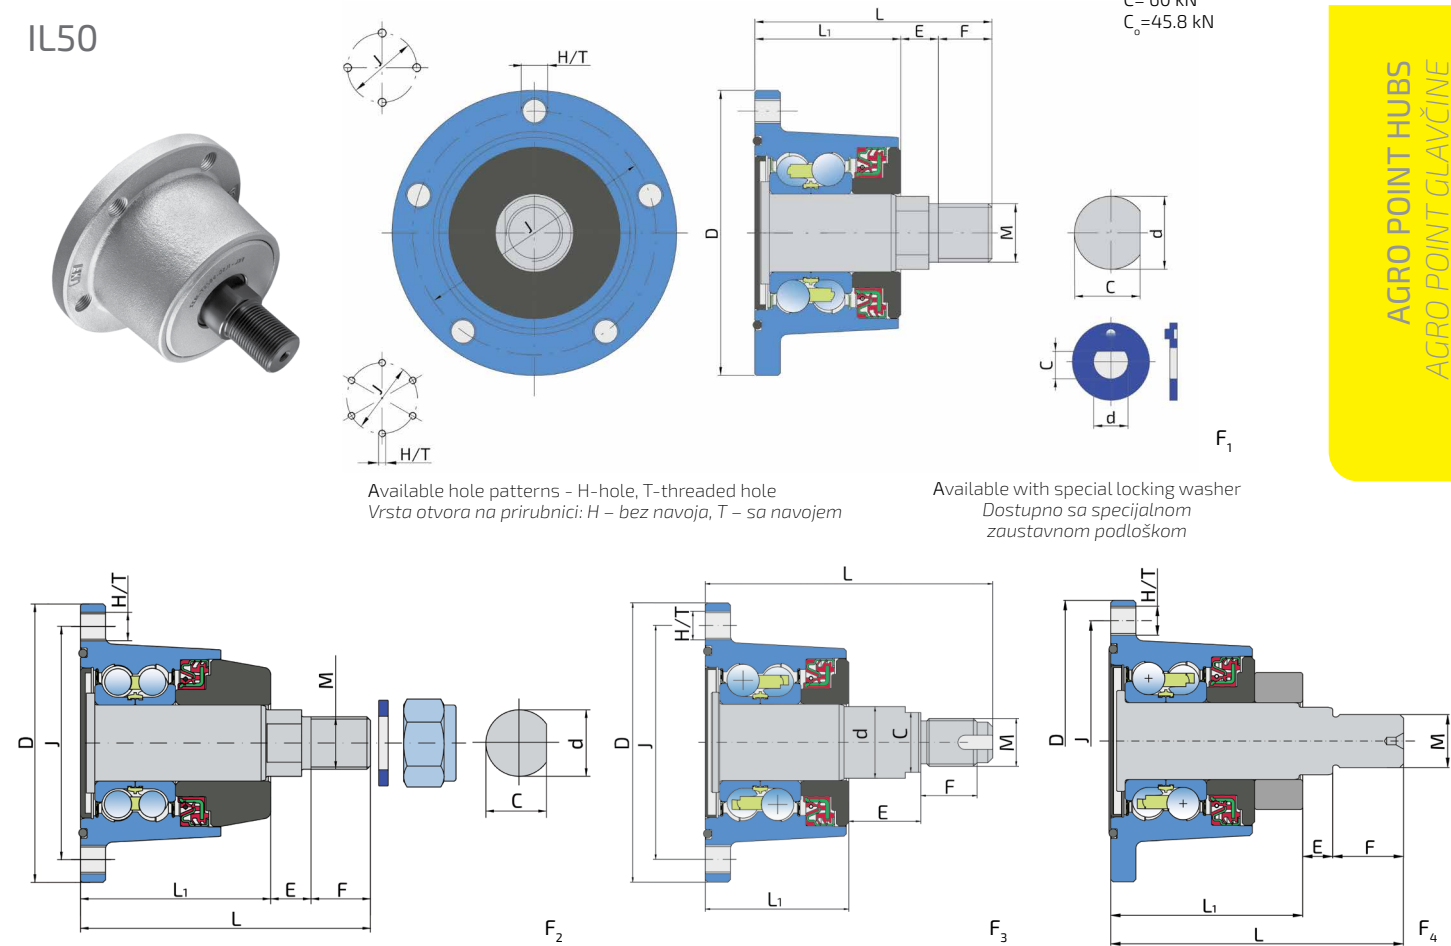

Available hole patterns - H-hole, T-threaded hole
Vrsta otvora na prirubnici: H - bez navoja, T - sa navojem

Available with special locking washer
Dostupno sa specijalnom
zaustavnom podloškom


Designation/Oznaka	J	D	H/T	d	C	M	L	L ₁	E	F	kg	Fig./Sl.
IL50-98/4T-M20x1.5	98	117	4xM12x1.25	30	25	M20x1.5	120.1	60	30.1	23.5	2.57	3
IL50-98/4T-M22	98	117	4xM12x1.25	27.95	25.4	M22x1.5	102	60	17	25	2.51	1
IL50-98/4T-M22x1.5-44	98	117	4xM12x1.25	27.95	25.4	M22x1.5	107	60	19	28	2.72	1
IL50-98/4T-M22x1.5-117	98	117	4xM12x1.25	27.95	25.4	M22x1.5	117	60	17	27	2.55	1
IL50-98/4T-M22-122-02	98	117	4xM12x1.25	27.95	25.4	M22x1.5	122	80	17	25	3.15	2
IL50-98/5T-M22	98	117	5xM12x1.25	27.95	25.4	M22x1.5	102	60	17	25	2.50	1
IL50-98/5Tx1.5-M22	98	117	5xM12x1.5	27.95	25.4	M22x1.5	102	60	13	29	2.50	1
IL50-98/6T-M22	98	117	6xM12x1.25	27.95	25.4	M22x1.5	102	60	17	25	2.51	1
IL50-98/6T-M22-113	98	117	6xM12x1.25	27.95	25.4	M22x1.5	113	60	28	25	2.54	1
IL50-98/4T-M24	98	117	4xM12x1.25	30	27.5	M24x2	106	60	17	29	2.55	1
IL50-98/5T-M24	98	117	5xM12x1.25	30	27.5	M24x2	106	60	17	29	2.55	1
IL50-98/6T-M24	98	117	6xM12x1.25	30	27.5	M24x2	106	60	17	29	2.51	1
IL50-98/6T-M24x2-04	98	117	6xM12x1.25	32	29.6	M24x2	111	60	20	27	3.30	1
IL50-100/4T-1"	100	117	4xM10	30	27.95	1" SAE14h	125	60	36	29	2.67	1
IL50-100/4T-M24x2	100	117	4xM10	30	27.95	M24x2	125	60	32	33	2.66	1
IL50-100/5T-M22-122	100	117	5xM12x1.25	28	23	M22x1.5	122	80	12.5	29.5	2.87	4
IL50-100/6T-M24.R	100	117	6xM10x1.25	30	27	M24x1.5	97.5	60	15.5	22	2.51	1
IL50-100/6T-M24.L	100	117	6xM10x1.25	30	27	M24x1.5-L	97.5	60	15.5	22	2.51	1
IL50-103/5T-M22	103	119	5xM12x1.25	27.95	25.4	M22x1.5	102	60	17	25	2.51	1

Typical Applications:
Potencijalno mesto ugradnje i primena:

Disc Harrows, Seeding Machines, Bed Maker and Manure Handling Machines
Tanjirače, sejačice, mašine za povrtarstvo i mašine za đubrenje

AGRO POINT HUB AGRO POINT GLAVČINA


IL50 without shaft IL50 bez osovine

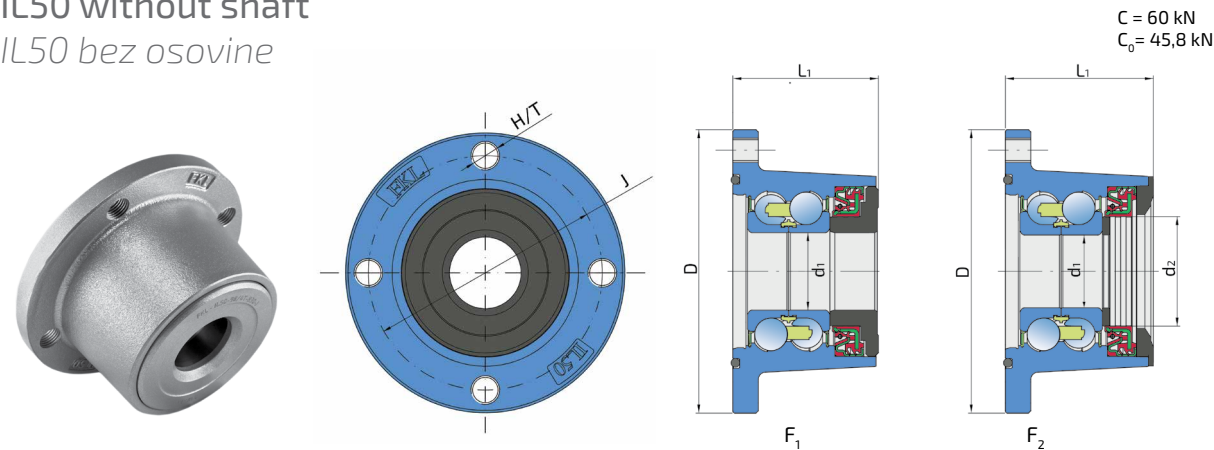

Available hole patterns - H-hole, T-threaded hole
Vrsta otvora na prirubnici: H - bez navoja, T - sa navojem

Designation/Oznaka	J	D	H/T	d ₁	d ₂	L ₁	kg	Fig./SL
IL50-98/4T-B30-F	98	117	4xM12x1.25	30	45	61	1.87	2
IL50-98/4T-B30-J	98	117	4xM12x1.25	30	-	60	1.96	1
IL50-98/6T-B30-J	98	117	6xM12x1.25	30	-	60	1.95	1

IL50V

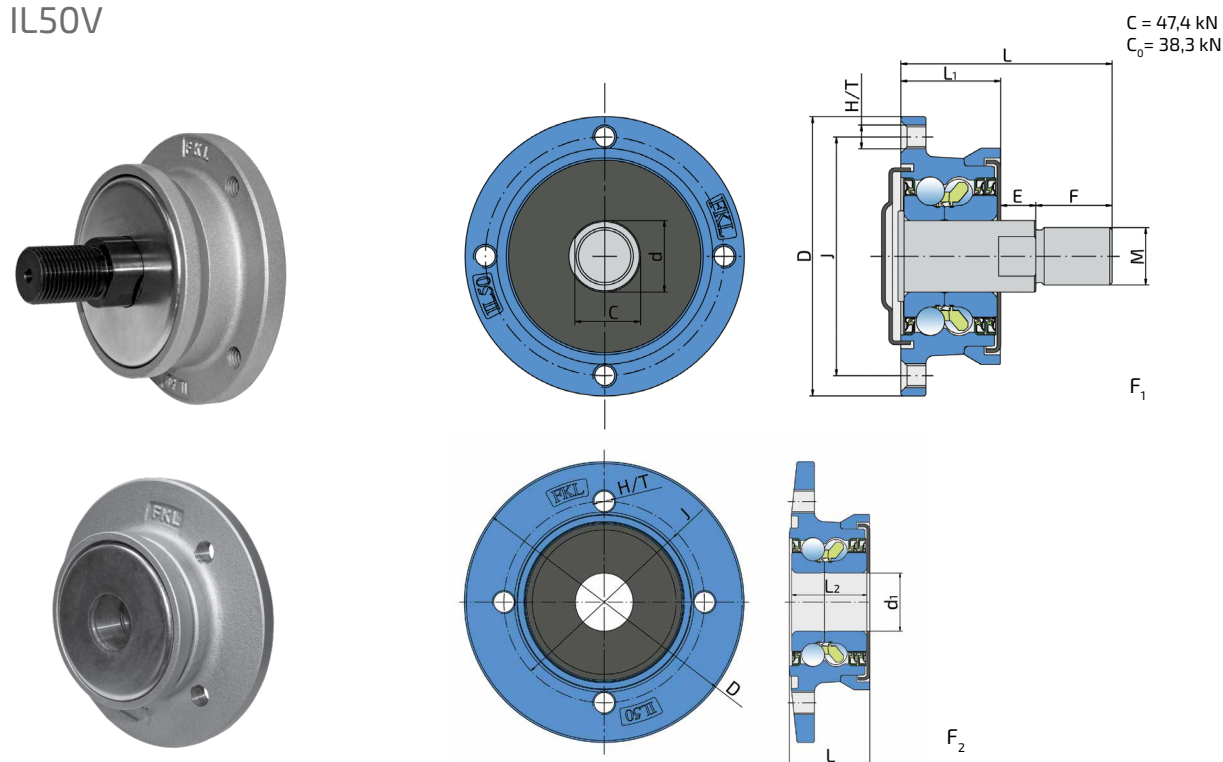


Designation/Oznaka	J	D	H/T	d	d ₁	C	M	L	L ₁	L ₂	E	F	kg	Fig./SL
IL50V-100/4T-M24x2	100	117	4xM10	30	-	27.5	M24x2	88.5	41.8	-	14.7	32	2.17	1
IL50V-104/4T-B30	104	145	4xM12x1.25	-	30	-	-	41.8	-	39	-	-	3.41	2

Typical Applications:
Potencijalno mesto ugradnje i primena:

Disc Harrows and Seeding Machines
Tanjirače i sejačice


AGRO POINT HUB AGRO POINT GLAVČINA

IL50 M

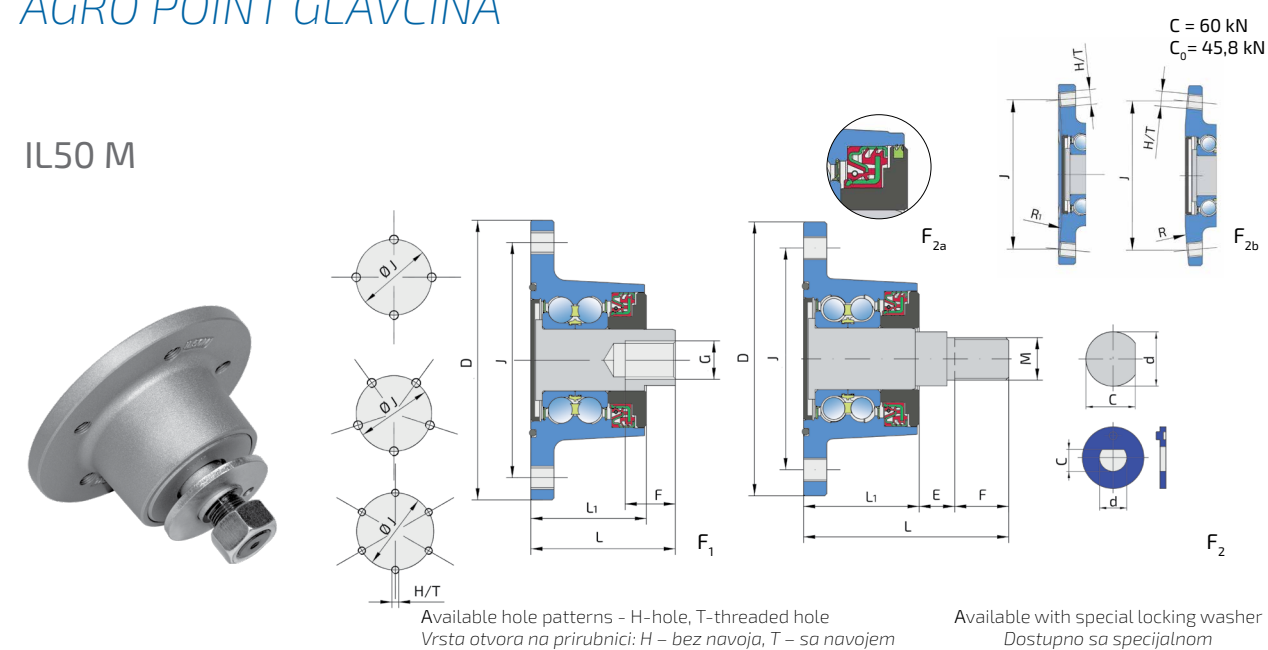

Available hole patterns - H-hole, T-threaded hole
Vrsta otvora na prirubnici: H - bez navoja, T - sa navojem

Available with special locking washer
Dostupno sa specijalnom zaustavnom podloškom

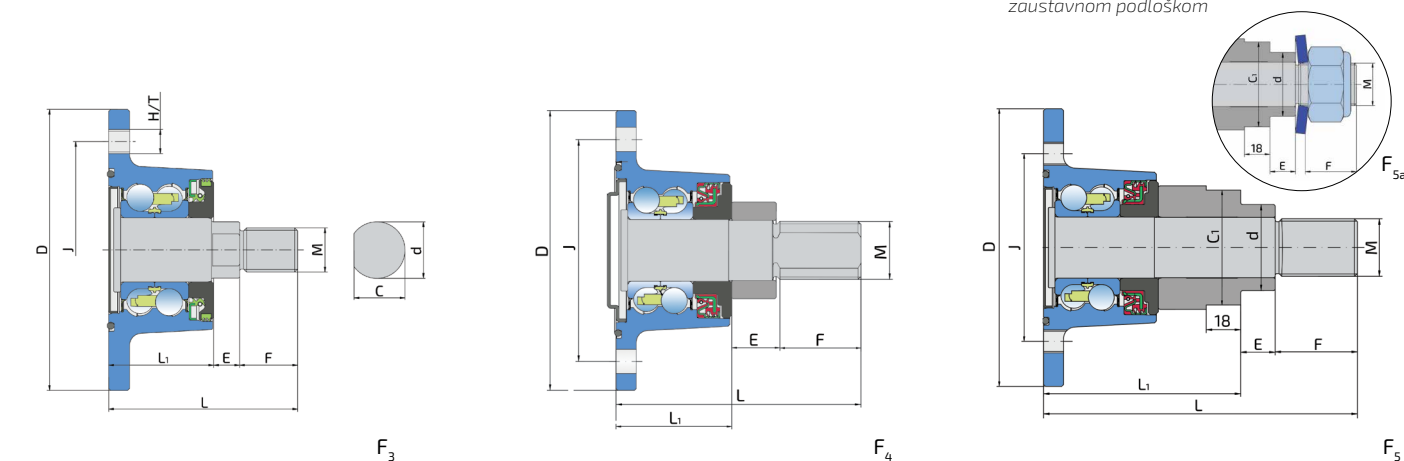

Designation/Oznaka	J	D	H/T	d	C	C ₁	M	G	L	L ₁	E	F	R	R ₁	kg	Fig./SL
IL50-98/4T-M30x2-164	98	145	4xM12x1.25	45	-	60	M30x2	-	164	103	18	43	-	-	4.37	5
IL50-104/5T-04	104	145	5xM12	27.95	25.4	-	M22x1.5	-	107	60	15	27	-	-	3.18	2
IL50-105/4H-M24x1.5-RH	105	145	4x12.3	30	27	-	M24x1.5-RH	-	97.5	60	15.5	22	-	-	3.10	2
IL50-105/4H-M24x1.5-LH	105	145	4x12.3	30	27	-	M24x1.5-LH	-	97.5	60	15.5	22	-	-	3.10	2
IL50-108/5T-M22x1.5-94.5	108	140	5xM12x1.25	28	25.5	-	M22x1.5	-	94.5	52.5	13	29	-	-	2.64	3
IL50-112/5T-M24x2	112	145	5xM12x1.25	30	28	-	M24x2	-	106	60	20	26	-	-	3.02	2
IL50-112/5Tx1.5-M24x2	112	145	5xM12x1.5	30	28	-	M24x2	-	106	60	18	28	-	-	2.99	2a
IL50-112/6Tx1.5-M24x2	112	145	6xM12x1.5	30	28	-	M24x2	-	106	60	18	28	-	-	2.99	2a
IL50-115/5H-M22	115	145	5x13	27.95	25.4	-	M22x1.5	-	102	60	17	25	-	-	2.95	2
IL50-115/4H-M24 *	115	145	4x12.5	30	27.5	-	M24x2	-	106	60	13	33	-	-	3.17	2a
IL50-115/4H-M30x2	115	145	4x12.5	30	26.9	-	M30x2	-	127	60	25	42	-	-	3.38	4
IL50-120/4H-M22x1.5 *	120	145	4x11	28	25.5	-	M22x1.5	-	119	67	17	35	-	-	3.25	2a
IL50-120/6H-M24x1.5	120	145	6x13	30	27	-	M24x1.5	-	97.5	60	15.5	22	-	-	2.96	2
IL50-120/6H-M24x1.5-103	120	145	6x13	31	29	-	M24x1.5	-	103	60	17	26	-	-	2.99	2
IL50-120/6T-M24x2-04-R633	120	145	6xM12x1.75	30	27.8	-	M24x2	-	129.2	63.2	35	27	-	633	3.61	2b
IL50-120/6T-M24x2-04-R633-114	120	145	6xM12x1.75	30	27.8	-	M24x2	-	114.2	63.2	20	27	-	633	3.53	2b
IL50-120/6T-M24x2-04-R635-149	120	145	6xM12x1.75	30	27.8	-	M24x2	-	149.2	63.2	56	27	635	-	3.57	2b
IL50-122/6T-M20x1.5	122	145	6xM12x1.25	31.8	29	-	-	M20x1.5	75	60	15	26	-	-	2.99	1
IL50-125/6T-M30x2-164 *	125	145	6xM12x1.75	45	-	60	M30x2	-	164	103	18	36	-	-	4.79	5a

* With a disc spring washer and nut/Sa tanjiraštom podloškom i navrtkom


Typical Applications:
Potencijalno mesto ugradnje i primena:

Disc Harrows
Tanjirače

AGRO POINT HUB AGRO POINT GLAVČINA

IL50 with solid forged holder
IL50 sa čvrstim kovanim nosačem

C = 60 kN
C₀ = 45.8 kN

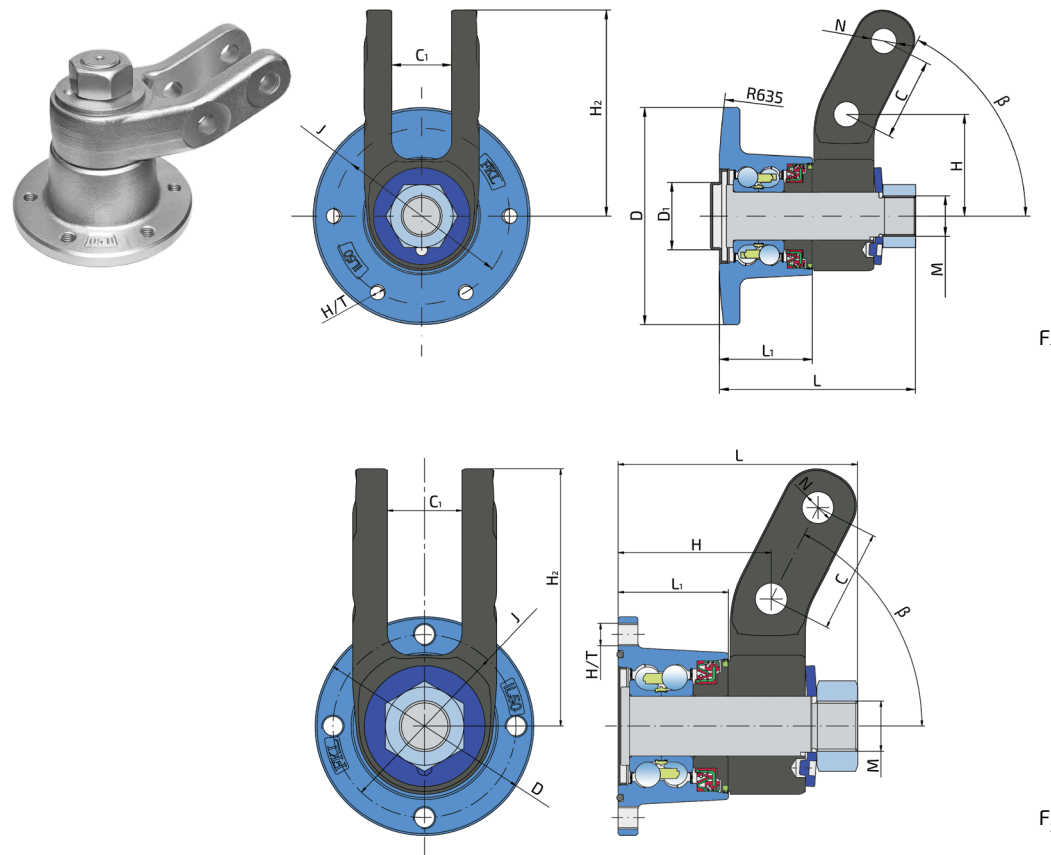

Designation/Oznaka	J	D	D ₁	C	C ₁	M	H/T	H	H ₂	N	L	L ₁	R	β	kg	Fig./Sl.
BDM ARMOR 2.0	120	145	45	55	40	M27x2	6xM12x1.75	68	137.7	17	131.2	62.2	635	63	6.08	1
IL50-98/4T-44	98	117	-	55	40	M27x2	4xM12x1.25	81.8	137.7	17	128	59	-	63	2.50	2


Typical Applications:
Potencijalno mesto ugradnje i primena:

Disc Harrows
Tanjirače

AGRO POINT HUB AGRO POINT GLAVČINA

IL50S


C = 48,76 kN
C₀ = 35,5 kN

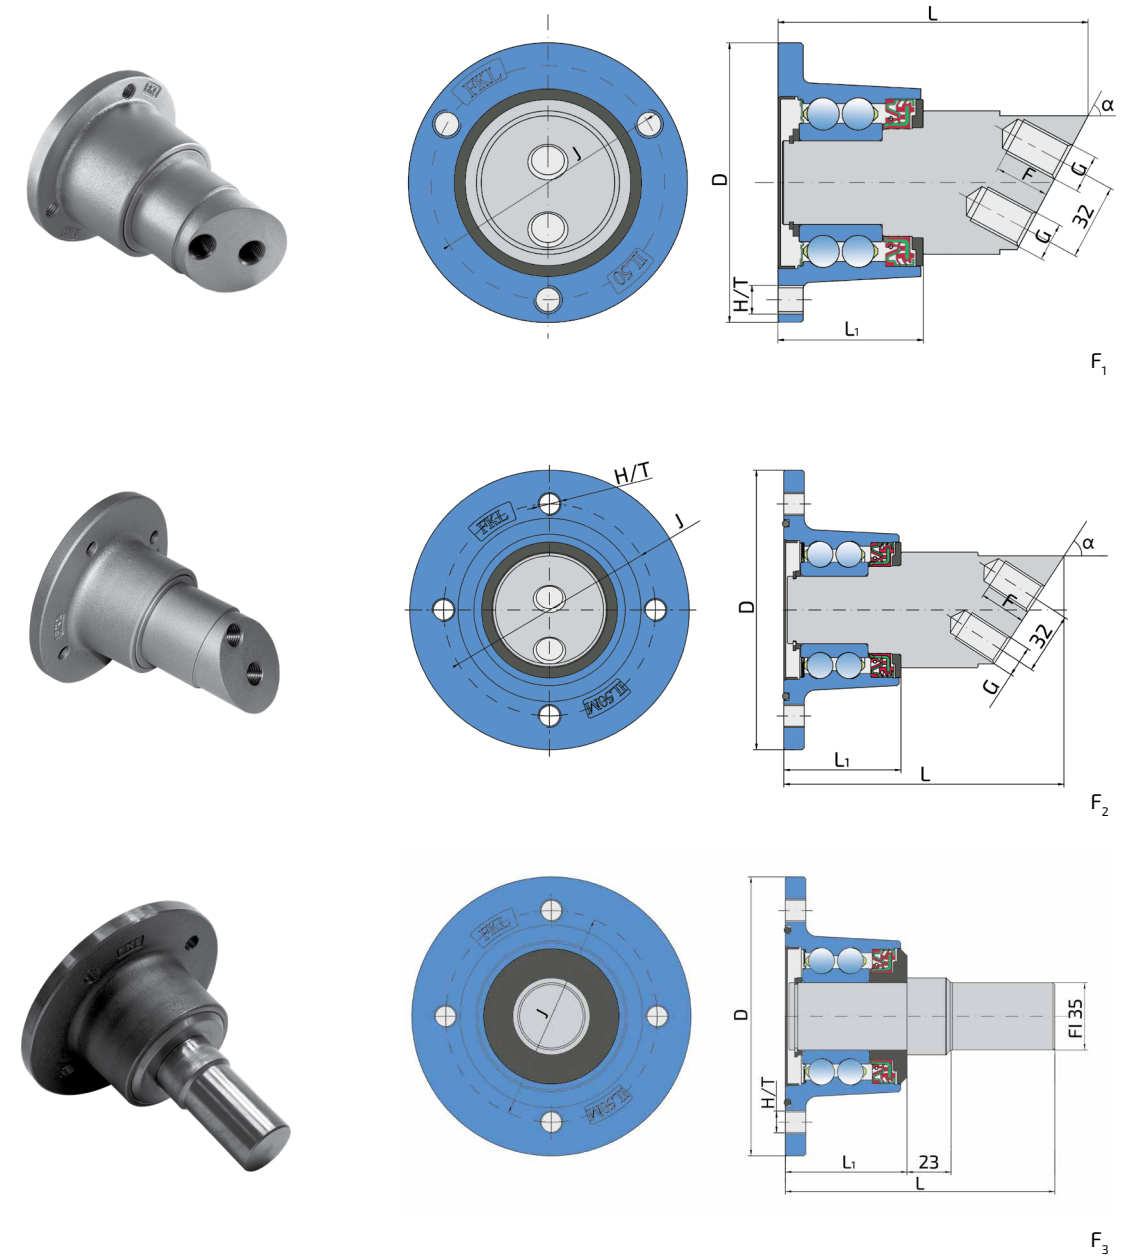

Designation/Oznaka	J	D	H/T	G	L	L ₁	F	α	kg	Fig./Sl.
IL50S-98/3T-2xM16	98	117	3xM12	M16x2	130	59.8	23	62	3.40	1
IL50S-110/4T-D35	110	145	4xM12x1.25	-	140	63	-	-	3.32	3
IL50S-110/4T-2xM16-40	110	145	4xM12x1.25	M16x2	145.4	61	24	57	3.97	2

Typical Applications:
Potencijalno mesto ugradnje i primena:


Disc Harrows and Seeding Machines
Tanjirače i sejačice



AGRO POINT HUB

AGRO POINT GLAVČINA

IL50A

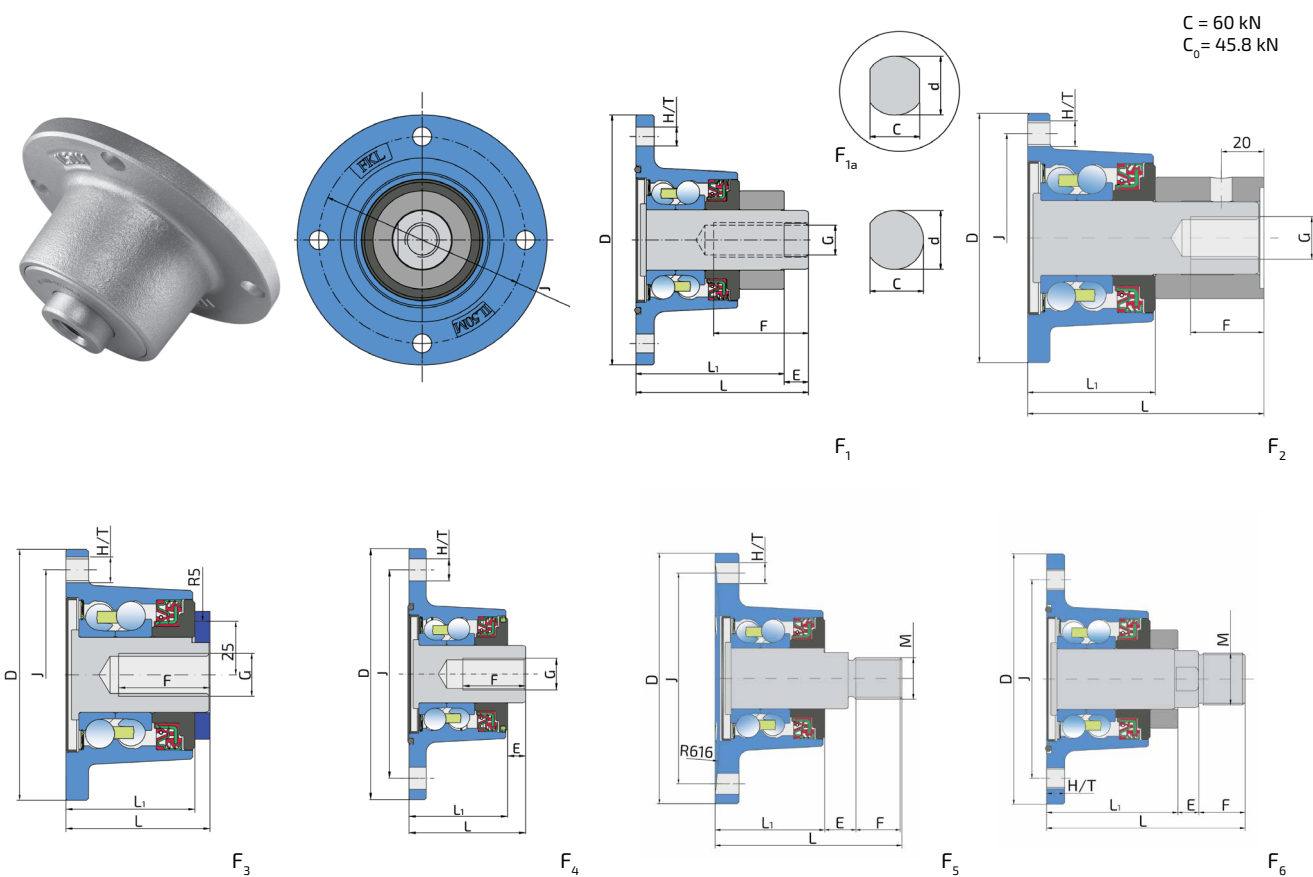

Designation/Oznaka	J	D	H/T	d	d ₁	C	M	G	L	L ₁	E	F	kg	Fig./Sl.
IL50A-98/3T-M20-10.2 *	98	117	3xM12	-	-	-	-	M20	111	60	-	32	3.19	2
IL50A-98/3T-M20-R5 *	98	117	3xM12	35	32.5	-	-	M20	67	60	-	42	2.34	3
IL50A-115/4T-M30x1.5	115	145	4xM12x1.25	33	30	M30x1.5	-	-	115	76	12	27	3.27	6
IL50A-120/4H-M24	120	145	4x11	34	28	-	-	M24	100	60	14	55	3.17	1a
IL50A-120/4H-M24-95	120	145	4x11	34	28	-	-	M24	95	60	9	50	3.15	1a
IL50A-120/4H-M20	120	145	4x11	34	31	-	-	M20	100	60	14	55	3.23	1
IL50A-122/6T-M20x1.5	122	152	6xM12	34	31	-	-	M20x1.5	73.5	60	13.5	40	2.83	4
IL50A-122/6H-M24x2-R616 *	122	145	6x12	35	32.5	M24x2	-	-	107.7	63.2	18	26.5	3.01	5

* Replacement for IL50S/Zamena za IL50S

Typical Applications:

Potencijalno mesto ugradnje i primena:


Disc Harrows, Seeding Machines and Manure Handling Machines
 Tanjirače, sejačice i mašine za đubrenje

AGRO POINT HUB

AGRO POINT GLAVČINA

IL50A without shaft

IL50A without shaft

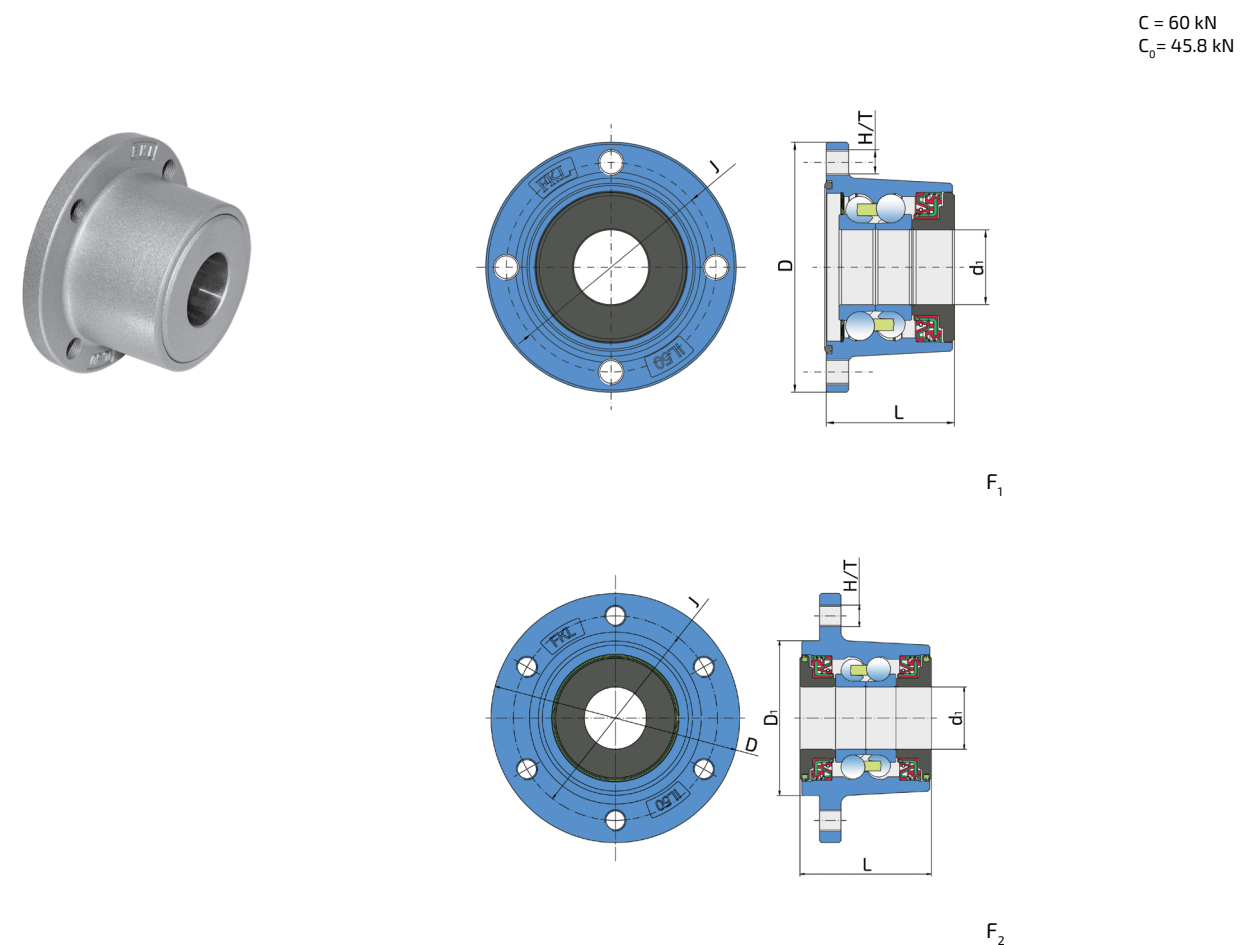


Designation/Oznaka	J	D	D ₁	H/T	d ₁	L	kg	Fig./Sl.
IL50A-98/4T-B35-J	98	117	-	4xM12x1.25	35	60	1.77	1
IL50A-115/6T-B35	115	140	87	6xM12x1.25	35	74	2.89	2

Typical Applications:

Potencijalno mesto ugradnje i primena:


Disc Harrows and Manure Handling Machines
 Tanjirače i mašine za đubrenje



AGRO POINT HUB AGRO POINT GLAVČINA

IL50B

C = 60 kN
C₀ = 45.8 kN

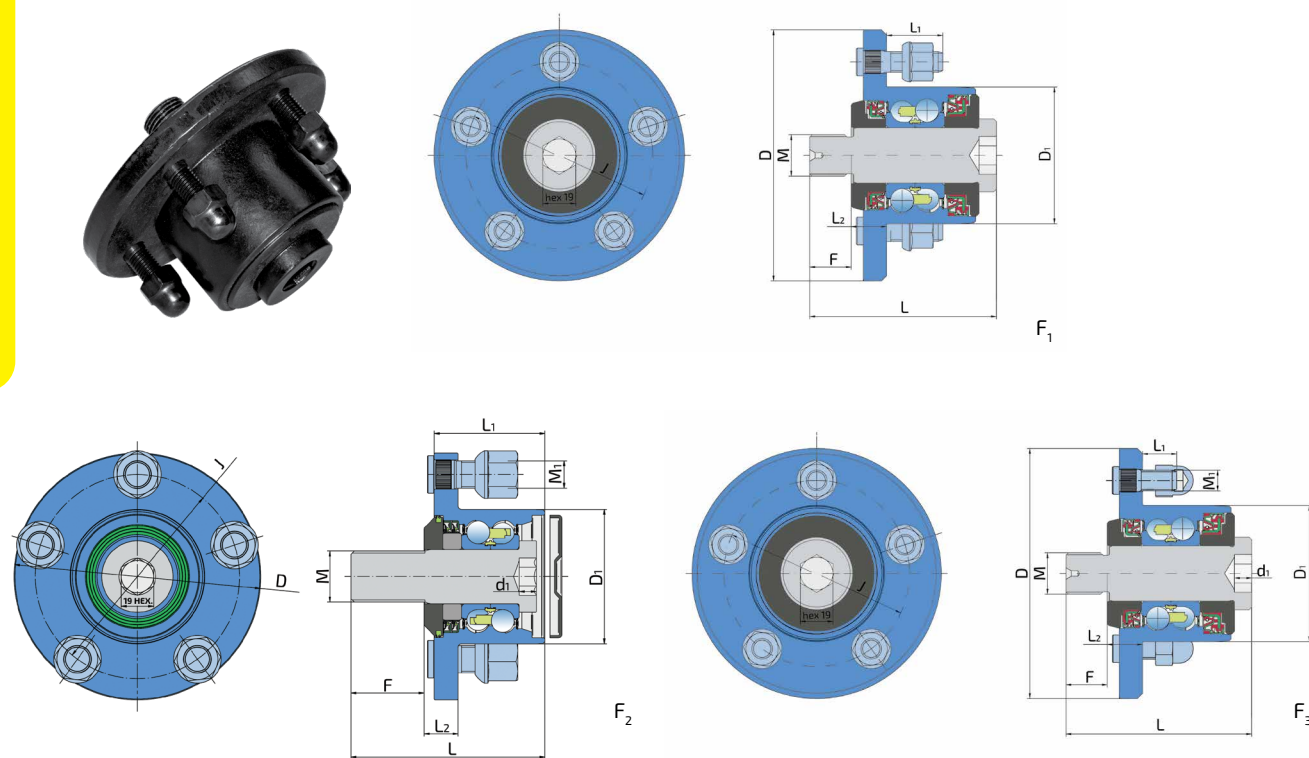

Designation/Oznaka	J	D	D ₁	d ₁	M	M ₁	L	L ₁	L ₂	F	kg	Fig./SL
IL50B-108/5T-M24x2-RH	108	145	79	10	M24x2-RH	5xM12x1.5	108	32.5	20.5	24	3.99	1
IL50B-108/5T-M24x2-LH	108	145	79	10	M24x2-LH	5xM12x1.5	108	32.5	20.5	24	3.99	1
IL50B-108/5T-M24x2-DIN1587-RH	108	145	79	10	M24x2-RH	5xM12x1.5	108	20	20.5	24	3.99	3
IL50B-108/5T-M24x2-DIN1587-LH	108	145	79	10	M24x2-LH	5xM12x1.5	108	20	20.5	24	3.99	3
IL50B-120/5T-M30x2	120	145	79	10	M30x2	5xM16x1.5	114	65	20	43	4.16	2

Typical Applications:


Potencijalno mesto ugradnje i primena:

Disc Harrows, Trailed Track Systems and Manure Handling Machines
Tanjirače, guseničari i mašine za đubrenje

AGRO POINT HUB AGRO POINT GLAVČINA

IL60

C = 75.86 kN
C₀ = 66.2 kN

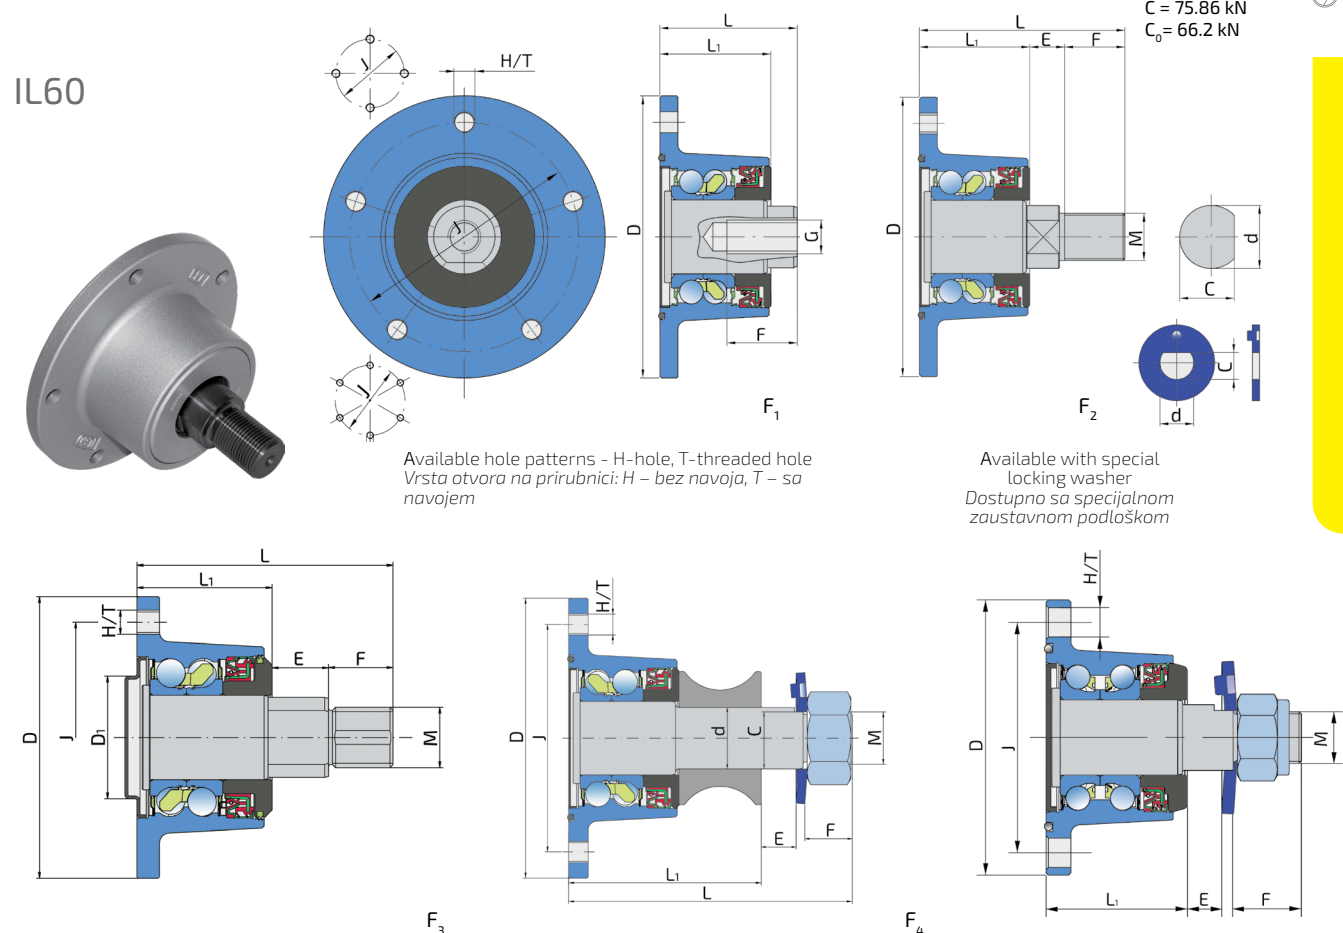

Designation/Oznaka	J	D	D ₁	H/T	d	C	M	G	L	L ₁	E	F	kg	Fig./SL
IL60-00-M20x1.5*	-	160	-	blank	34.9	31	-	M20x1.5	78	63	-	40	4.20	1
IL60-114.5/5T-M30	114.5	140	61	5xM12	39.8	34.5	M30	-	127	67	28	32	3.91	3
IL60-120/4H-M20*	120	160	-	4x11	34	31	-	M20	96	82	-	14	4.35	1
IL60-122/6H-M24	122	160	-	6x12	35	32.5	M24x2	-	106.5	63	16.5	27	4.20	2
IL60-120/4x12.5H-M20*	120	160	-	4x12.5	34	31	-	M20	96	82	-	57.5	4.38	1
IL60-130/6T-M20x1.5	130	160	-	6xM12x1.25	34.9	31	-	M20x1.5	82	63	-	40	3.72	1
IL60-130/6T-M24	130	160	-	6xM12x1.25	30	28	M24x2	-	117.5	63	24.5	33.5	4.10	2
IL60-130/6T-M27	130	160	-	6xM12x1.25	36	33.5	M27x2	-	117.5	63	21	33.5	4.40	2
IL60-130/6T-M27-44	130	160	-	6xM12x1.25	35	32.5	M27x2	-	120	63	25	25.7	4.32	5
IL60-130/6T-M27x2-122.5	130	160	-	6xM12x1.25	36	33.5	M27x2	-	122.5	63	25	34.5	4.45	2
IL60-130/6T-M30-03**	130	160	-	6xM12x1.25	40	37	M30x1.5	-	124	63	32	29	4.40	2
IL60-130/6T-M30-04	130	160	-	6xM12x1.25	35	32.5	M30x1.5	-	162	110	20	27.01	5.54	4
IL60-130/6T-M30-112-03**	130	160	-	6xM12x1.25	40	37	M30x1.5	-	112	63	20	29	4.40	2
IL60-133/4T-M20x1.5	133.35	160	-	4xM14x1.5	34.9	31	-	M20x1.5	78	63	-	40	4.13	1
IL60-133/4H-3/4-16UNF	133.35	160	-	4x13.5	31	34.9	-	3/4"-16UNF	78	63	-	40	4.10	1
IL60-140/5T-M27	140	160	-	5xM12x1.25	36	33.5	M27x2	-	117.5	63	21	33.5	4.40	2
IL60-140/5H-M30	140	160	-	5x13	35	32.5	M30x1.5	-	110.5	63	19.5	26	4.30	2
IL60-140/5H-M30-44	140	160	-	5x13	35	32.5	M30x1.5	-	110.5	63	16	26.5	4.32	2
IL60-140/6T-M27	140	160	-	6xM12x1.25	36	33.5	M27x2	-	117.5	63	21	33.5	4.40	2
IL60-140/6T-M30	140	160	-	M12x1.5	35	32.5	M30x1.5	-	110.5	63	24.8	22.7	3.97	2
IL60-150/6T-M24x2	150	178	-	6xM12x1.25	30	28	M24x2	-	121	63	20.5	37.5	4.57	1
IL60-150/6T-M30	150	178	-	6xM12x1.25	35	32.5	M30x2	-	126.5	63	23.5	40	4.57	2
IL60-150/6T-M33-04	150	180	-	6xM12x1.25	40	37	M33x2	-	116.5	63	20	30	4.94	2

* C = 66.35 kN; C₀ = 56.49 kN

** With a disc spring washer DIN 127 B and nut DIN 934/Sa tanjirastom podloškom DIN 127 B i navrtkom DIN 934


Typical Applications:

Potencijalno mesto ugradnje i primena:

Disc Harrows, Seeding Machines and Manure Handling Machines
Tanjirače, sejačice i mašine za đubrenje


AGRO POINT HUB AGRO POINT GLAVČINA

IL60 with special design
IL60 sa specijalnom konstrukcijom

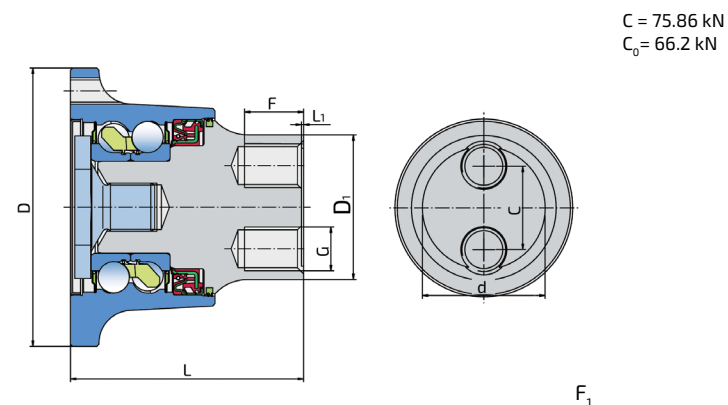


$C = 75.86 \text{ kN}$
 $C_0 = 66.2 \text{ kN}$


F_1

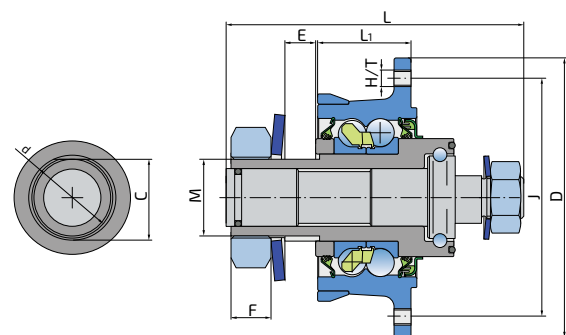


F_2



F_3



F_4

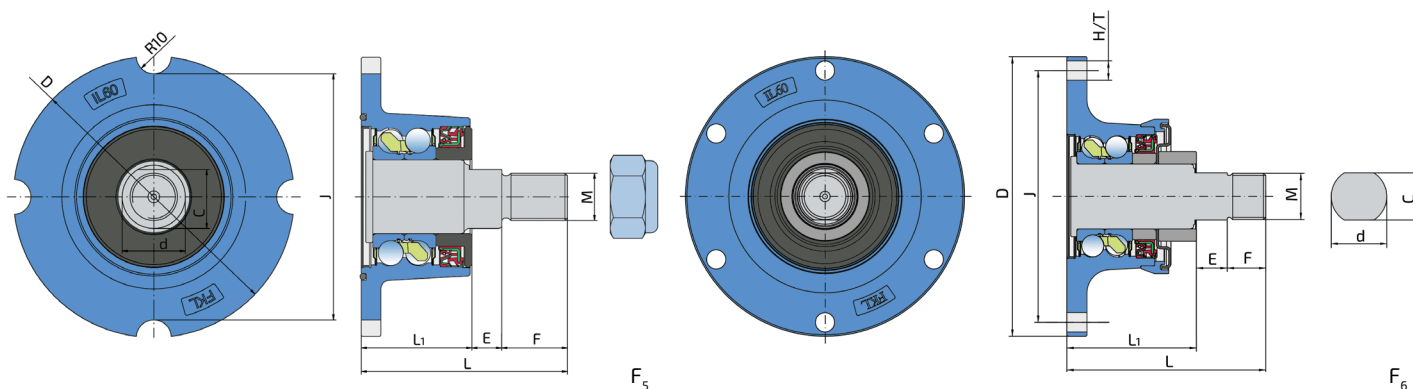

F_5

F_6


Designation/Oznaka	J	D	D ₁	H/T	d	C	M	G	L	L ₁	E	F	kg	Fig./Sl.
IL60-106/5T-2xM20	106	127	66	5xM12	56	38	-	2xM20	106.5	1.0	-	27	4.41	1
IL60-115/8T-M39-M20	115	135	-	8xM10x1.5	42	39.5	M39x1.5	-	157	47.9	15	26	4.07	2
IL60-125/6T-2xM20	125	145	66	6xM12	56	38	-	2xM20	106.5	1.0	-	27	4.8	1
IL60-127/4H-04	127	160	-	4x13	41	32.5	M27x2	-	129.5	68.5	25	28	4.61	3
IL60-140/5H-04	140	176	-	5x13	35	32.5	M27x2	-	149	79.5	37.5	28	5.21	4
IL60-140-R10-M27+M27x2	140	160	-	-	36	33.5	M27x2	-	117.5	63	17	37.5	4.15	5
IL60-163/6H-M30	163	181	-	6x12.5	36	30.5	M30x1.5	-	129	84	20	25	5.42	6

Typical Applications:
Potencijalno mesto ugradnje i primena:

Disc Harrows and Seeding Machines
Tanjirače i sejačice



AGRO POINT HUB AGRO POINT GLAVČINA

IL60 without shaft
IL60 bez osovine

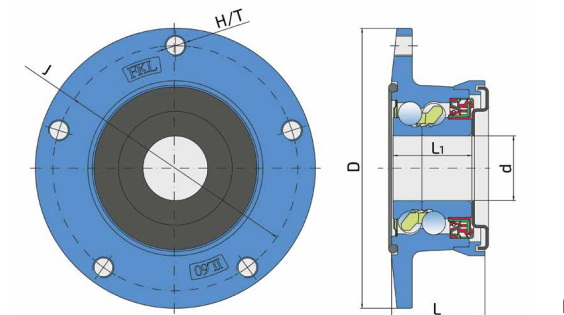

$C = 66.35 \text{ kN}$
 $C_0 = 56.49 \text{ kN}$

F_1

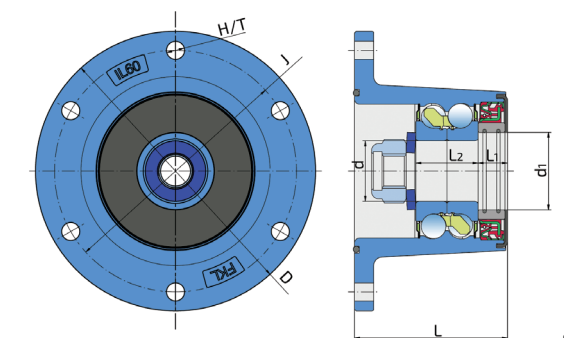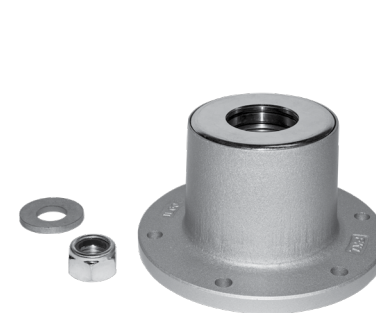

F_2

$C = 75.86 \text{ kN}$
 $C_0 = 66.2 \text{ kN}$

Designation/Oznaka	J	D	H/T	d	d ₁	L	L ₁	L ₂	kg	Fig./Sl.
IL60-140/5T-B37 *	140	160	5xM12x1.25	37	-	53.4	45	-	3.41	1
IL60-140/6H-B35	140	162	6x10.5	35	45	88.5	17	36	3.86	2

* Adaptable IL60 for disc angle change/Prilagodljiva IL60 glavčina sa promenom ugla diska


Typical Applications:
Potencijalno mesto ugradnje i primena:

Disc Harrows and Seeding Machines
Tanjirače i sejačice

AGRO POINT HUB AGRO POINT GLAVČINA


Adaptable IL60 for disc angle change

Prilagodljiva IL60 glavčina sa promenom ugla diska

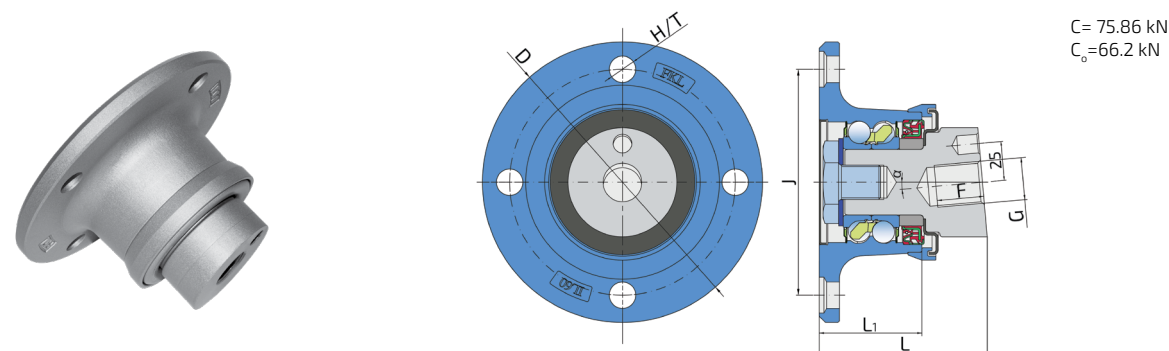

Designation/Oznaka	J	D	H/T	G	L	L ₁	F	α	kg
IL60-145/4H-M27x2-RH-40	145	180	4x17	M27x2-7H-R	108	66	30	5°	5.48
IL60-145/4H-M27x2-LH-40	145	180	4x17	M27x2-7H-L	108	66	30	5°	5.48

IL60C

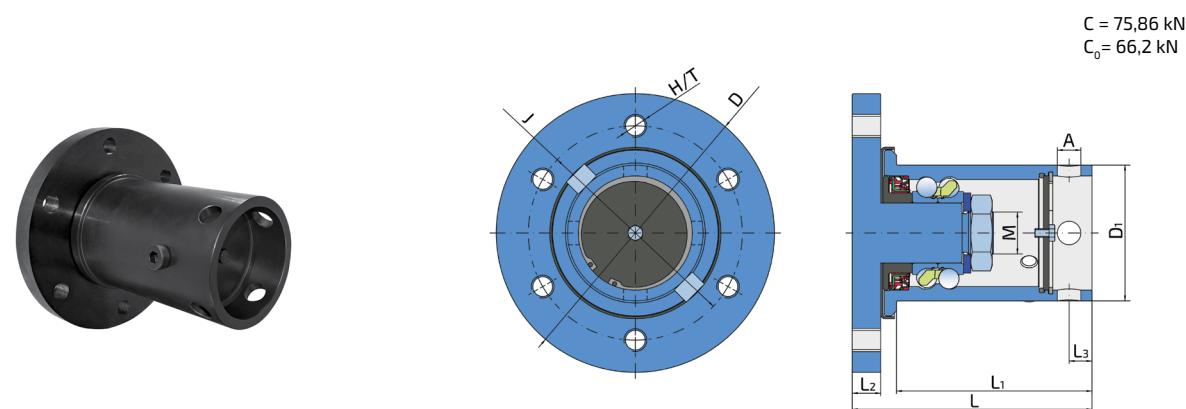


Designation/Oznaka	J	D	D ₁	H/T	M	L	L ₁	L ₂	L ₃	A	kg
IL60C-150/6T-D95-RH	150	195	95	6xM16	M30x1.5-RH	168	137	20	16	4x16.5	9.74
IL60C-150/6T-D95-LH	150	195	95	6xM16	M30x1.5-LH	168	137	20	16	4x16.5	9.74

Typical Applications:
Potencijalno mesto ugradnje i primena:


Disc Harrows
Tanjirače

AGRO POINT HUB AGRO POINT GLAVČINA

IL70

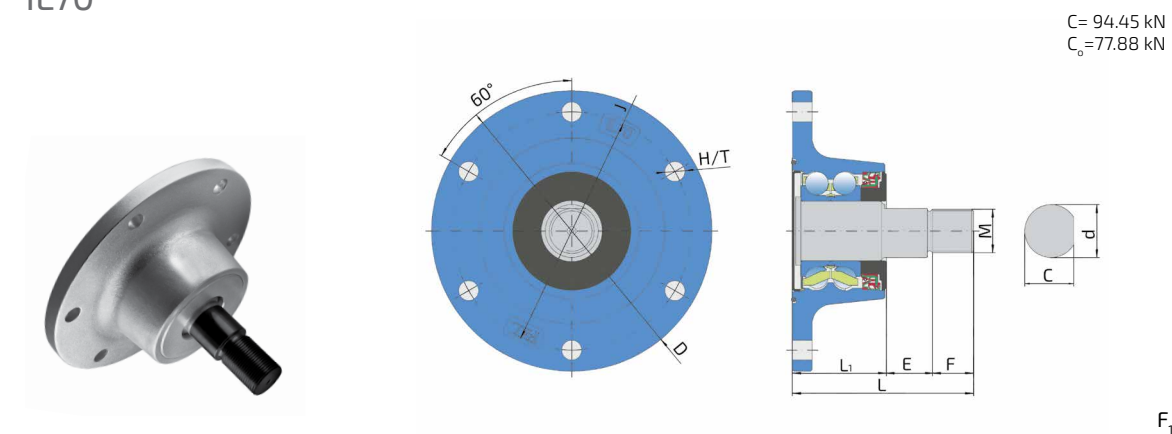

F₁

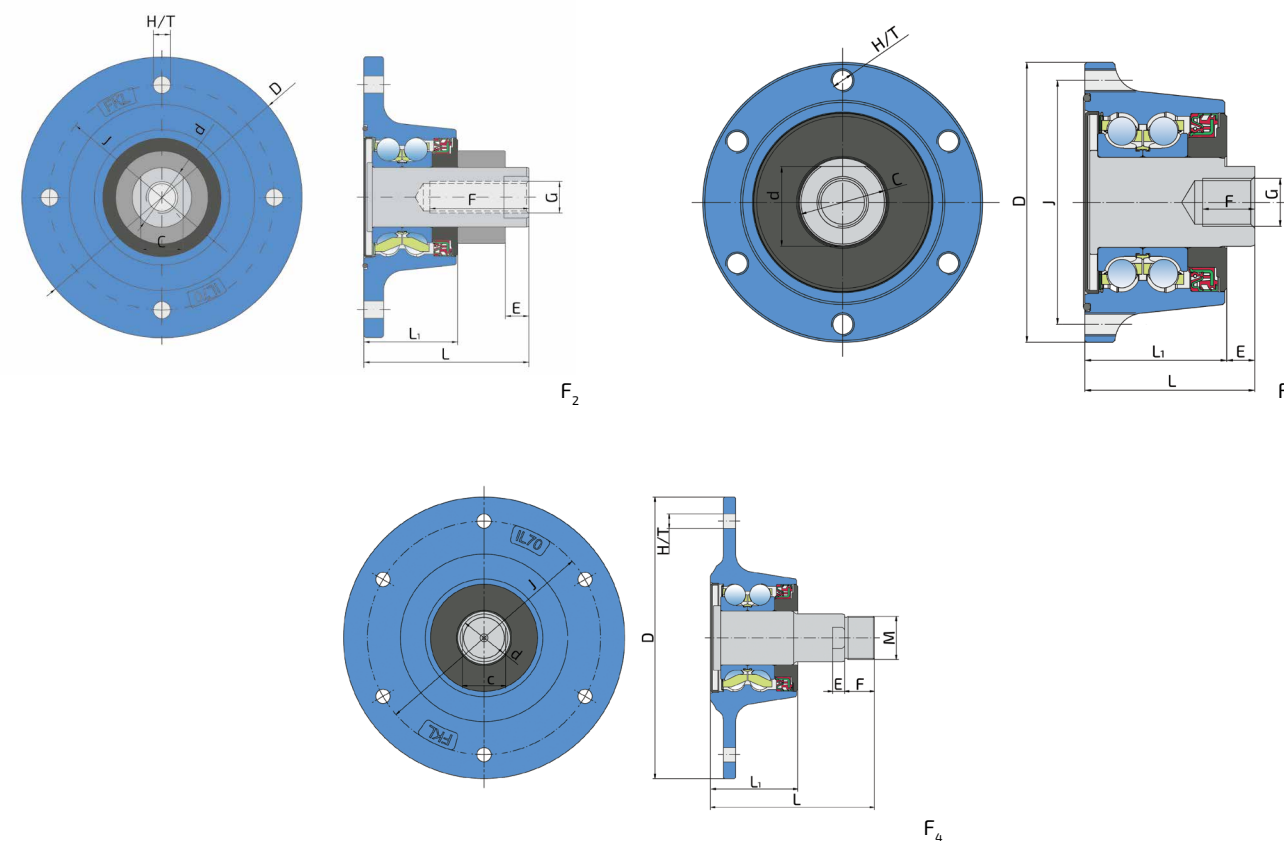

F₂


F₃



F₄

Designation/Oznaka	J	D	d	C	H/T	M	G	L	L ₁	E	F	kg	Fig./Sl.
IL70-122/6T-M24	122	140	44	40	6xM12	-	M24x2	85	71	14	26	4.80	3
IL70-170/4H-M24	170	212	45	32	4x13	-	M24	125	71	18	75	8.13	2
IL70-170/6H-M33x2	170	212	40	37	6x18	M30x2	-	125	71	19	35	7.55	1
IL70-180/6H-M33x2	180	212	40	37	6x15	M30x2	-	137	71	31	32	7.96	1
IL70-195/6H-M36x1.5-RH	195	235	40	36	6x12	M36x1.5-RH	-	137	72	10	25	7.43	4
IL70-195/6H-M36x1.5-LH	195	235	40	36	6x12	M36x1.5-LH	-	137	72	10	25	7.43	4

Typical Applications:
Potencijalno mesto ugradnje i primena:

Disc Harrows and Hemp Machines
Tanjirače i hederi za konoplju



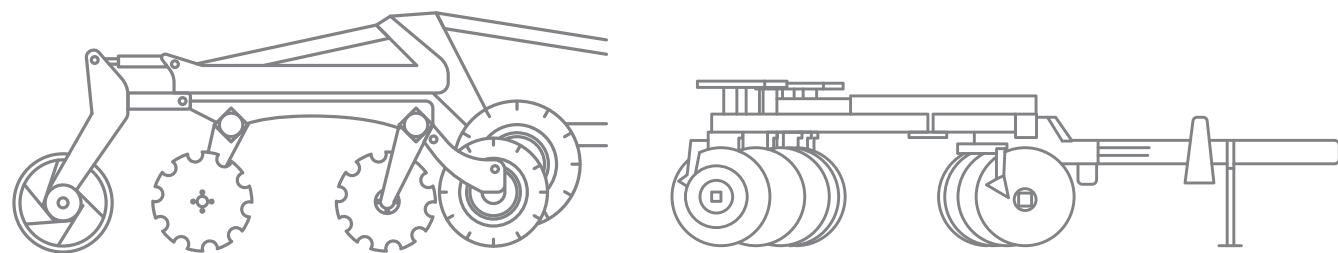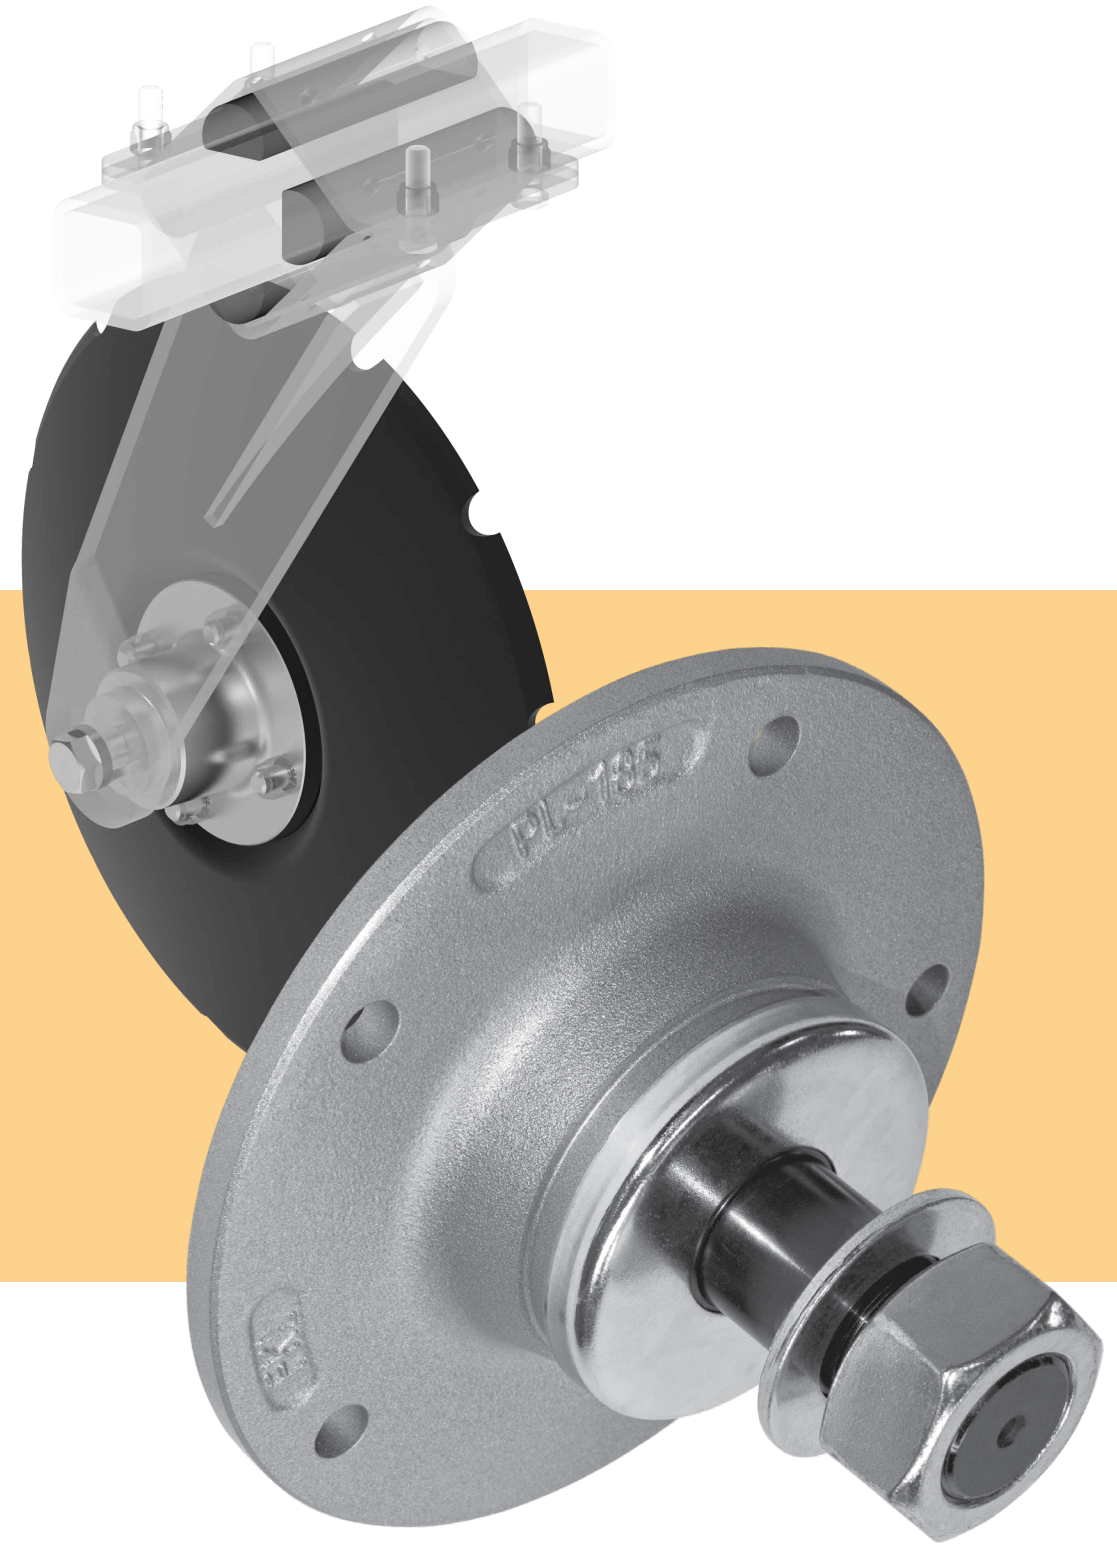


Disc Harrow Solutions
Ležajevi i ležajne jedinice tanjirače

Bearing Units


Ležajne jedinice

PL-127-G

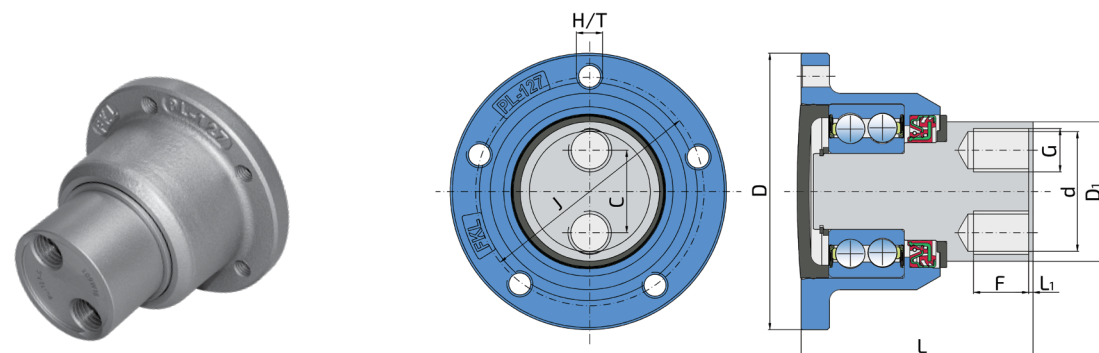

Designation/Oznaka	J	D	D ₁	d	d ₁	H/T	G	L	L ₁	F	kg
PL-127-G	106	127.3	64.2	55.7	38	M12	2xM20	106.5	2	25	3.81

PL-140

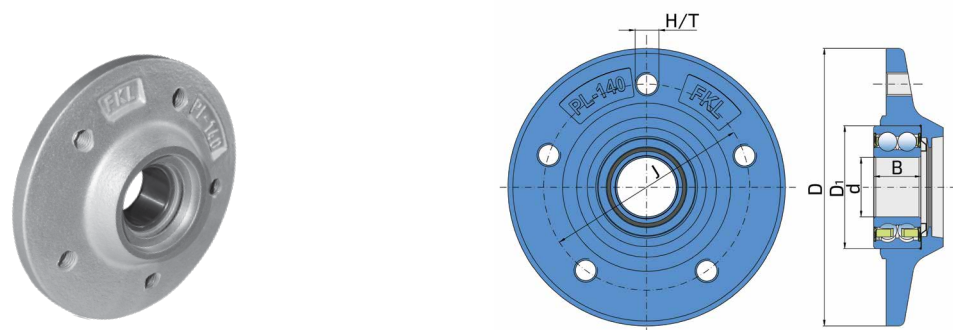

Designation/Oznaka	J	D	D ₁	d	H/T	L	B	kg
PL-140	104	140	62	30	M12	35	23.8	1.50


Typical Applications:
Potencijalno mesto ugradnje i primena:

Disc Harrows and Seeding Machines
Tanjirače i sejačice

Bearing Units


Ležajne jedinice

PL-185-M30-R+M30x1.5-RH(LH)

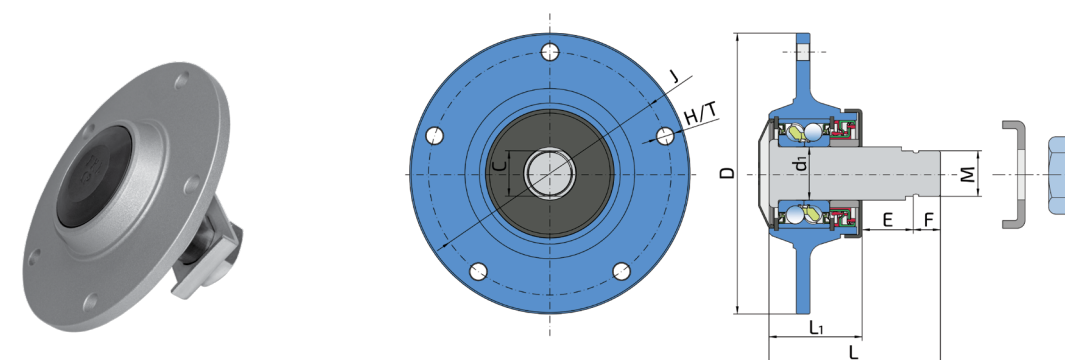

Designation/Oznaka	D	d ₁	C	J	H/T	L	L ₁	E	F	M	kg
PL-185-M30-R+M30x1.5	185	35	30	160	12	113	61.6	28.4	23	M30x1.5-RH	3.92
PL-185-M30-L+M30x1.5-LH	185	35	30	160	12	113	61.6	28.4	23	M30x1.5-LH	3.92


PL-185-155/5H-M30x1.5-RH(LH)

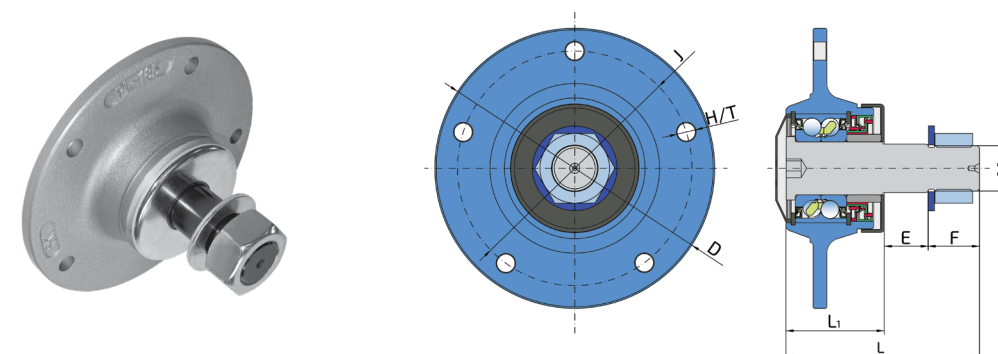

Designation/Oznaka	D	d ₁	C	J	H/T	L	L ₁	E	F	M	kg
PL-185-155/5H-M30x1.5	155	-	-	185	5x12	128	65	30	34	M30x1.5-RH	4.23
PL-185-155/5H-M30x1.5-LH	155	-	-	185	5x12	128	65	30	34	M30x1.5-LH	4.23

Typical Applications:
Potencijalno mesto ugradnje i primena:


Disc Harrows
Tanjirače



Double Row Angular Contact Ball Bearings



Dvoredni kuglični ležajevi sa kosim dodirom

BW1-306037





Designation/Oznaka	d	D	B	α	kg
BW1-306037	30	60.030	37	34°	0.47

306230



Designation/Oznaka	d	D	B	α	kg
306230	30	62	30	34°	0.39

357234A

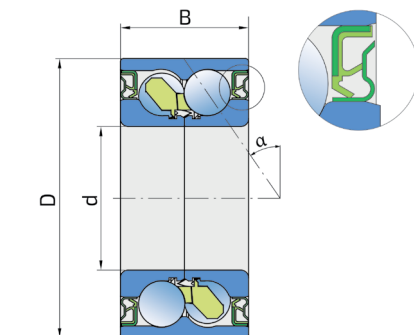

Designation/Oznaka	d	D	B	α	kg
357234A	35	72	34	40°	0.54

Typical Applications:
Potencijalno mesto ugradnje i primena:

Disc Harrows
Tanjirače

Double Row Angular Contact Ball Bearings



Dvoredni kuglični ležajevi sa kosim dodirom

3305 B.2RS

3306 2RS



3206 B.2RS1

3307 B.2RS1



Designation/Oznaka	d	D	B	α	kg
3305 B.2RS	25	62	25.4	30°	0.36
3306 2RS	30	72	30.2	30°	0.54
3206 B.2RS1	30	62	23.8	30°	0.29
3307 B.2RS1	35	80	34.9	25°	0.70


3209 NPPB.AH02



Designation/Oznaka	d	D	B	α	kg
3209 NPPB.AH02	45	90	30.2	30°	0.63

Typical Applications:
Potencijalno mesto ugradnje i primena:


Disc Harrows
Tanjirače



Bearing Units with Pressed Steel Housing


Ležajne jedinice sa limenim kućištem

GWST 209PPB13
GWST 211PPB20

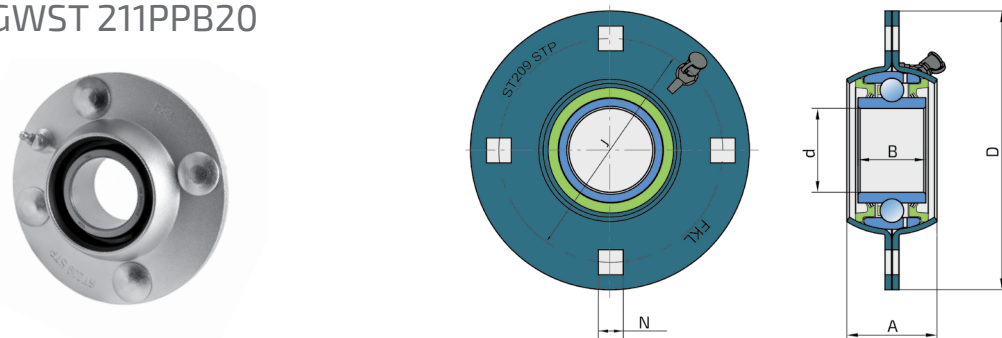

Designation/Oznaka	d	D	J	A	B	N	kg
GWST 209PPB13	45.24	150	120.5	48.5	36.53	13.5	1.84
GWST 211PPB20	55.7	167	138	56.5	39.7	13.5	2.71

GWST 209 2TD
GWST 209-30 2TD
GWST 211-40.5 2TD

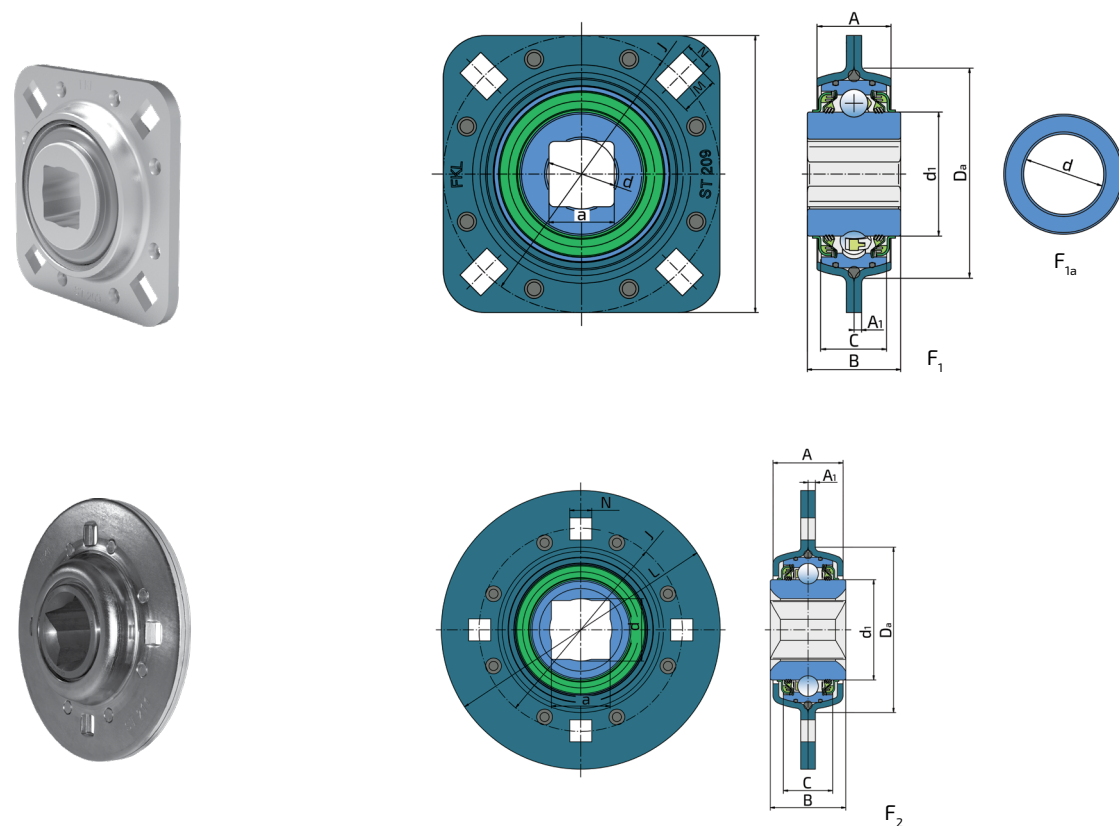

Designation/Oznaka	a	d	d ₁	A	A ₁	B	C	Da	L	J	N	M	kg	Fig./Sl.
GWST 209 2TD	-	38.7	56.8	34	3.5	42.85	30	100.1	127	127	13.5	17.5	1.67	1a
GWST 209-30 2TD	30	32	56.8	34	3.5	42.85	30	100.1	127	127	13.5	17.5	1.75	1
GWST 211-40.5 2TD	40.5	43	69.1	48	5	52	34	114	192	140	15.2	-	3.23	2


Typical Applications:
Potencijalno mesto ugradnje i primena:

Disc Harrows
Tanjirače

Bearing Units with Pressed Steel Housing


Ležajne jedinice sa limenim kućištem

GWST 209PPB12 *ZN
GWST 209PPB39
GWST 209PPB40
GWST 211PPB15
GWST 211PPB15.H

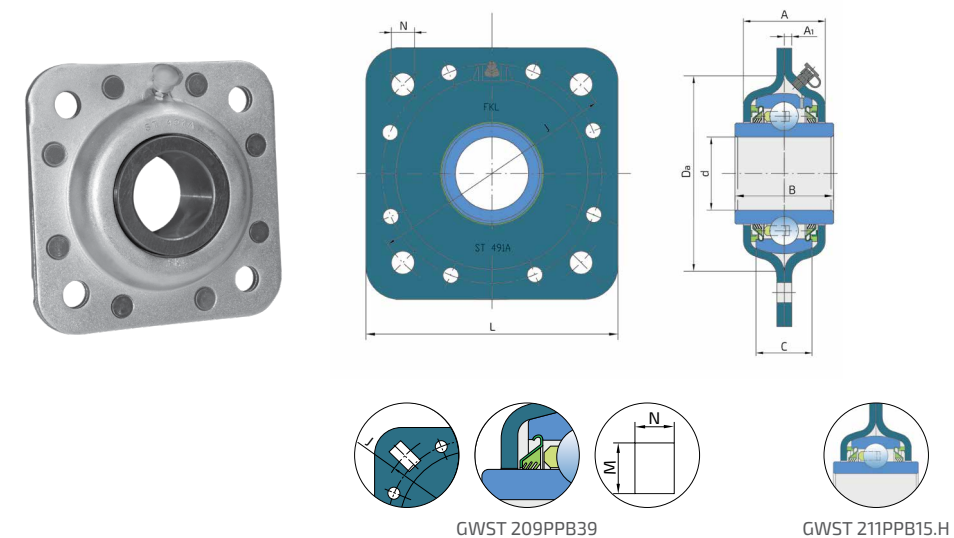

Designation/Oznaka	d	B	A	A ₁	C	D _a	L	J	N	M	kg
GWST 209PPB12 *ZN	44.83	42.85	39	3.5	22	97	127	127	13.5	-	1.51
GWST 209PPB39	38.7	42.85	39	3.5	22	97	127	127	13.5	17.5	1.63
GWST 209PPB40	40	42.85	39	3.5	22	97	127	127	13.5	-	1.62
GWST 211PPB15	55.58	55.55	44.7	4	25	113	140	140	13.5	-	2.05
GWST 211PPB15.H	55.58	55.55	44.7	4	25	113	140	140	13.5	-	2.05


GWST 209PPB29
GWST 209PPB32
GWST 211PPB40
GWST 211PPB40.X2

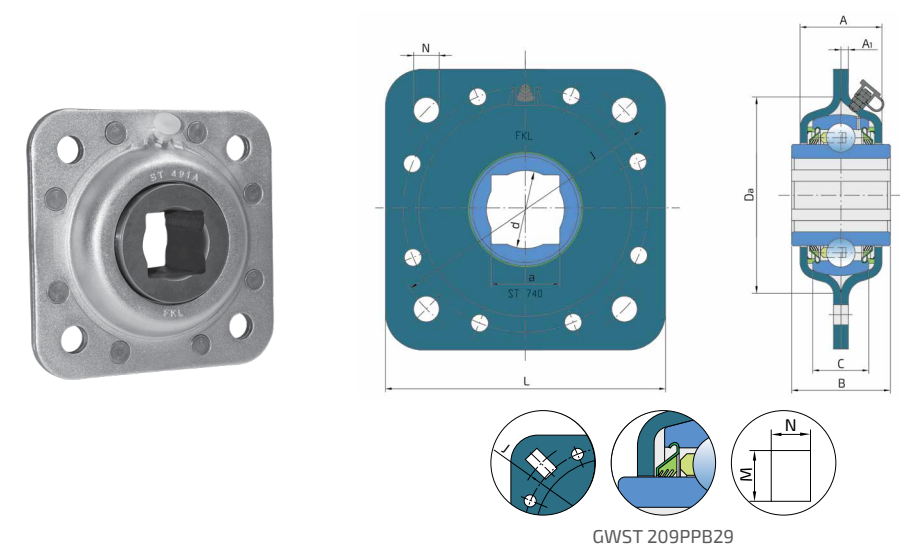

Designation/Oznaka	a	d	B	A	A ₁	C	D _a	L	J	N	M	kg
GWST 209PPB29	32.8	35.5	42.85	39	3.5	22	97	127	127	13.5	17.5	1.63
GWST 209PPB32	30	32	45	39	3.5	22	97	127	127	13.5	-	1.77
GWST 211PPB40	40.5	45.5	45	44.7	4	25	113	140	140	13.5	-	2.25
GWST 211PPB40.X2	35	38	55.5	44.7	4	25	113	140	140	13.5	-	2.65

Typical Applications:
Potencijalno mesto ugradnje i primena:


Disc Harrows
Tanjirače



Ball Bearings


Kuglični ležajevi

GW 209PPB12

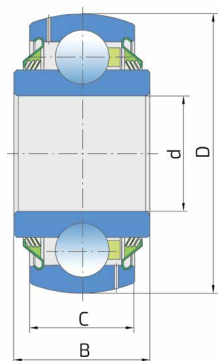


Designation/Oznaka	d	D	B	C	kg
GW 209PPB12	44.831	85	42.85	22	0.68

GW 209PPB30

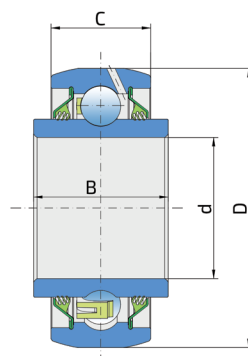

Designation/Oznaka	d	D	B	C	kg
GW 209PPB30	44.958	88.7	42.86	31.75	0.92

GW 211PP202

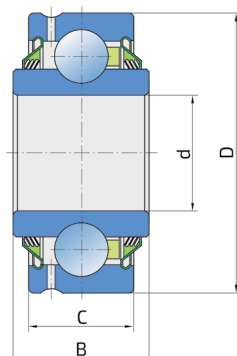

Designation/Oznaka	d	D	B	C	kg
GW 211PP202	51.308	100	60.3	33.34	1.11


Typical Applications:
Potencijalno mesto ugradnje i primena:

Disc Harrows
Tanjirače

Ball Bearings


Kuglični ležajevi

GW 211PPB3

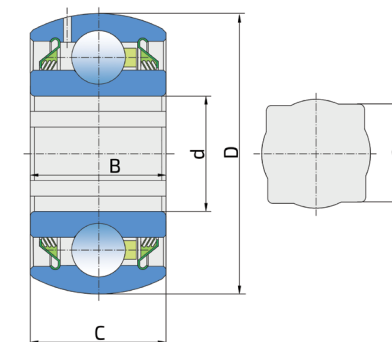


Designation/Oznaka	a	d	D	B	C	kg
GW 211PPB3	38.9	55.7	100	33.34	33.4	1.21

GW 211PPB20

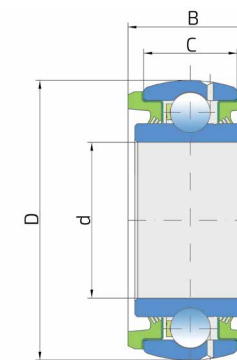

Designation/Oznaka	d	D	B	C	kg
GW 211PPB20	55.7	100	44.6	33.4	1.00



GW 211PP25

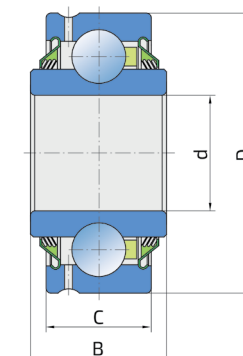

Designation/Oznaka	d	D	B	C	kg
GW 211PP25	45.212	100	44.5	33.34	1.11


Typical Applications:
Potencijalno mesto ugradnje i primena:

Disc Harrows
Tanjirače




Rubberized Bearing Units Gumirane ležajne jedinice

GWR 209PPB30

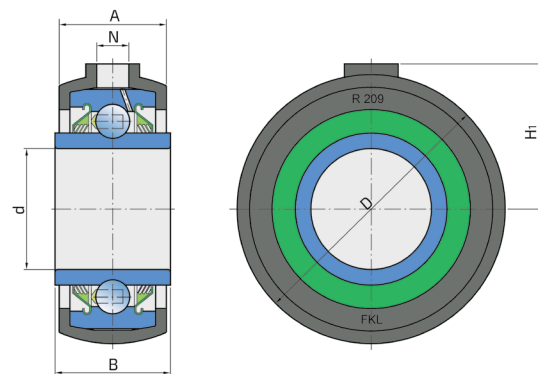

Designation/Oznaka	d	D	A	B	H ₁	N	kg
GWR 209PPB30	44.958	101	40	42.86	54	12.7	0.92

GWR 211PPB21

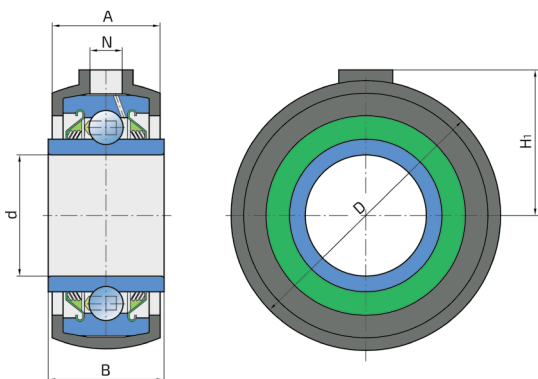


Designation/Oznaka	d	D	A	B	H ₁	N	kg
GWR 211PPB21	45.212	113	44.7	53.975	60.5	12.7	1.62

Typical Applications:
Potencijalno mesto ugradnje i primena:

Disc Harrows
Tanjirače


Ball Bearings Kuglični ležajevi

SBX 1227




Designation/Oznaka	d	D	B	C	kg
SBX 1227	55.562	110	55.562	38.3	1.80

W208KPP53

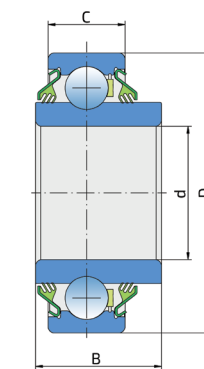


Designation/Oznaka	d	D	B	C	kg
W208KPP53	38.1	80	36	22	0.54

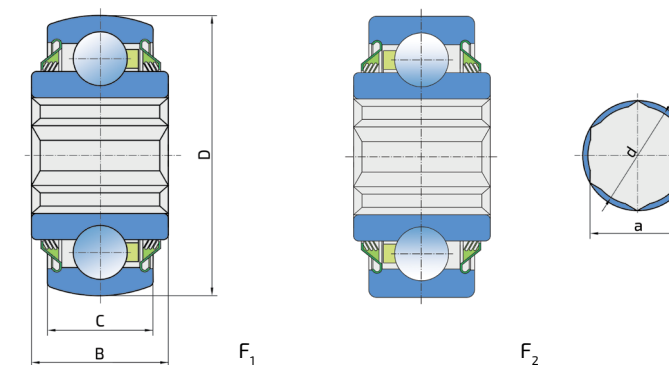W 208PPB16
W 208PP16

Designation/Oznaka	a	d	D	B	C	kg	Fig./Sl.
W 208PPB16	31.78	32.5	80	36.5	18	0.67	1
W 208PP16	31.78	32.5	80	36.5	18	0.67	2


Typical Applications:
Potencijalno mesto ugradnje i primena:

Disc Harrows
Tanjirače




Trunnion Bearing Units

Podesive ležajne jedinice




Disc Harrow Solutions
Ležajevi i lež. jed. tanjirače

GWHG 211PP25

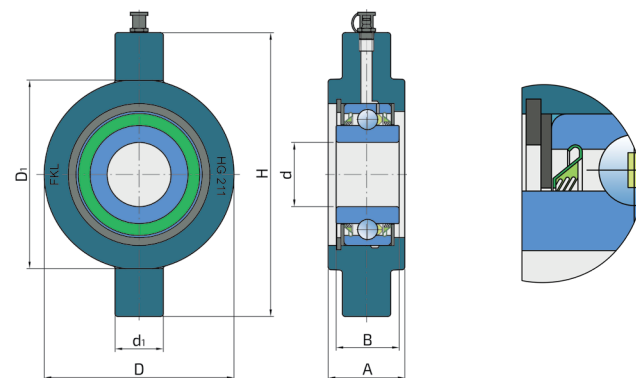


Designation/Oznaka	d	d _i	D	D _i	A	B	H	kg
GWHG 211PP25	45.212	34	134	132	54	44.5	200	4.88

GWHGR 211PP202

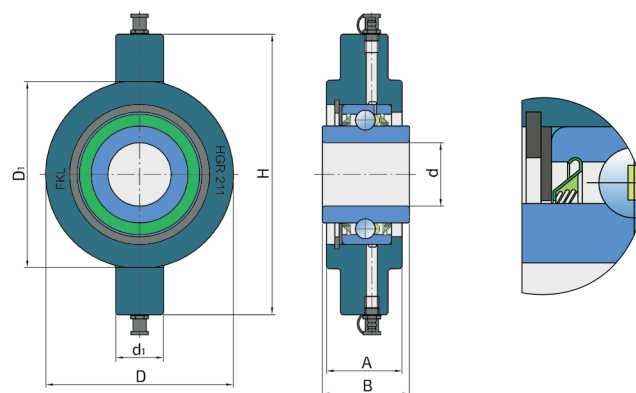

Designation/Oznaka	d	d _i	D	D _i	A	B	H	kg
GWHGR 211PP202	51.308	37	129.5	128.5	57	60.3	202.5	4.80

GWHGR 211-2TD-35

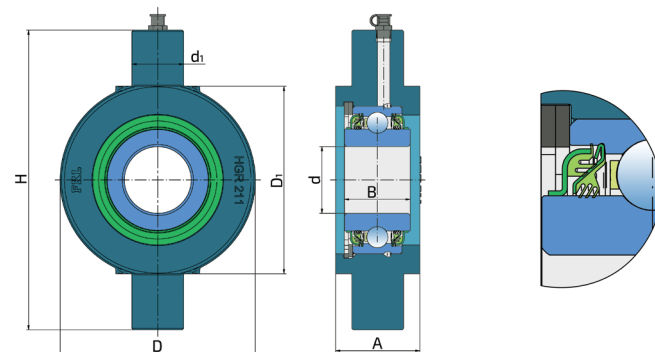


Designation/Oznaka	d	d _i	D	D _i	A	B	H	kg
GWHGR 211-2TD-35	45.212	35	132	127	57	44.5	203	4.46

Typical Applications:


Potencijalno mesto ugradnje i primena:


Disc Harrows
Tanjirače

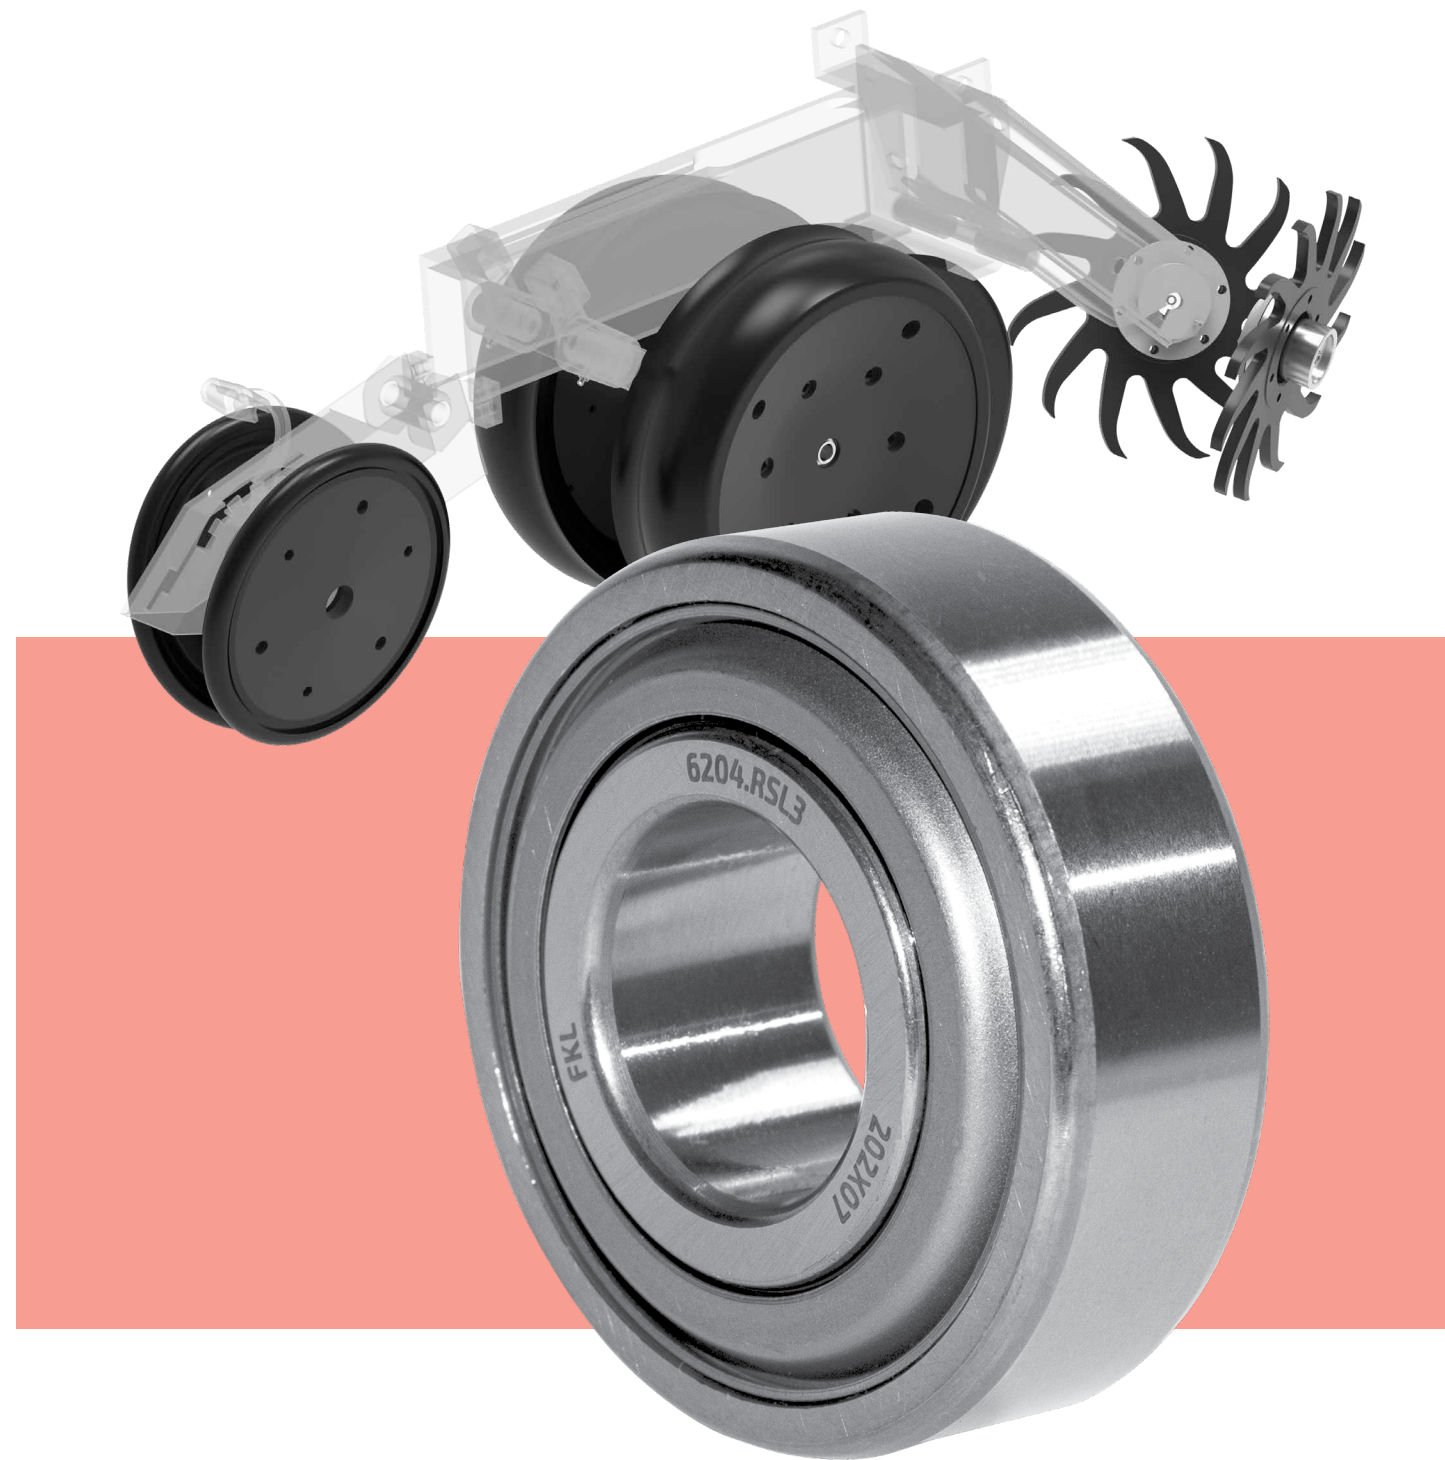

Seeding Machine Solutions

Ležajevi i ležajne jedinice sejačice






Double Row Ball Bearings with Shaft


Dvoredni kuglični ležajevi sa osovnicom

VP-16/40/74.5

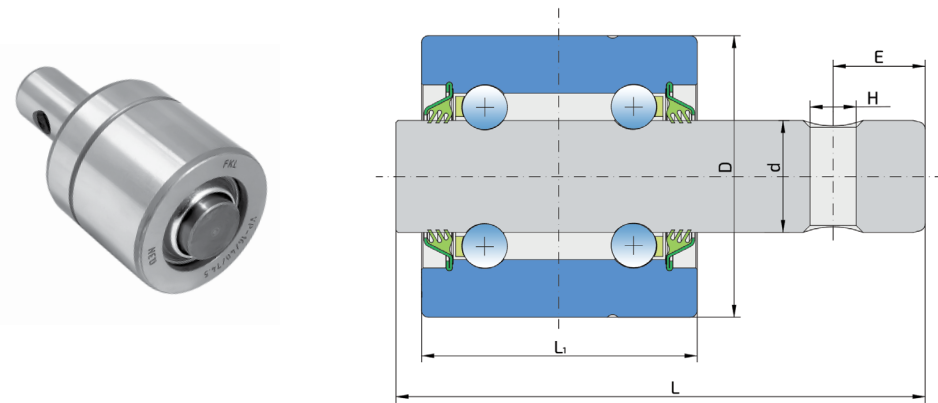

Designation/Oznaka	d	D	L	L ₁	H	E	kg
VP-16/40/74.5	15.918	40	74.5	38.9	6.5	12.95	0.36


VP-M20x1.5/40/72-R (L)

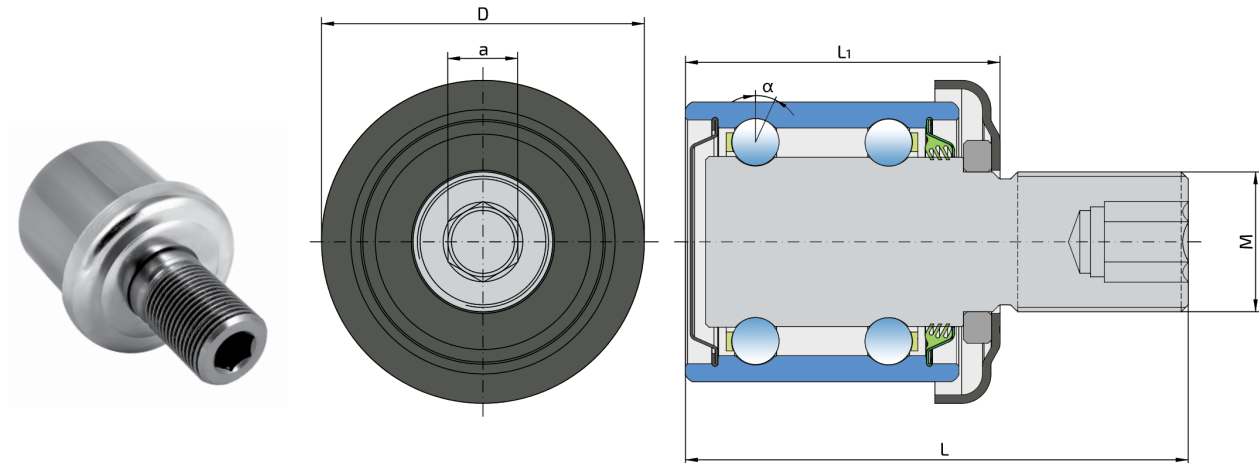

Designation/Oznaka	a	d	D	L	L ₁	M	α	kg
VP-M20x1.5/40/72-R(L)	10	24.2	40	72	44	M20x1.5	20°	0.37

Typical Applications:
Potencijalno mesto ugradnje i primena:


Seeding Machines
Sejačice



Double Row Ball Bearings with Shaft


Dvoredni kuglični ležajevi sa osovnicom

885152

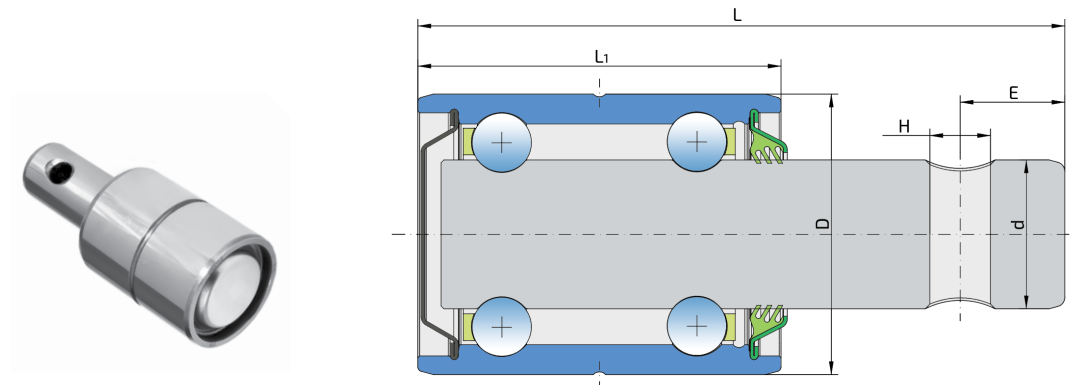

Designation/Oznaka	d	D	L	L ₁	H	E	kg
885152	15.918	30	69.3	38.9	6.5	11.2	0.18


885154B.1

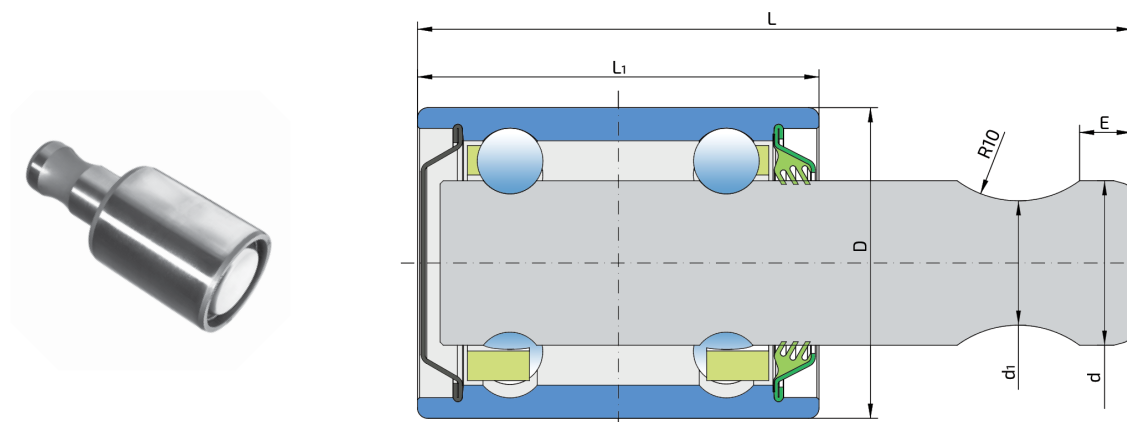

Designation/Oznaka	d	d ₁	D	L	L ₁	E	R	kg
885154B.1	15.88	12	30	69	38.8	5	10	0.18

Typical Applications:
Potencijalno mesto ugradnje i primena:



Seeding Machines
Sejačice



Double Row Angular Contact Ball Bearings


Dvoredni kuglični ležajevi sa kosim dodirom

3204 B.2RS1
3205 B.2RS1
3210 A 2RS



Designation/Oznaka	d	D	B	α	kg
3204 B.2RS1	20	47	20.6	25°	0.16
3205 B.2RS1	25	52	20.6	25°	0.18
3210 A 2RS	50	90	30.2	30°	0.67


3204 T



Designation/Oznaka	d	D	B	C	α	kg
3204 T	20	47	25.2	22	25°	0.19

Typical Applications:
Potencijalno mesto ugradnje i primena:


Seeding Machines
Sejačice



Double Row Angular Contact Ball Bearings


Dvoredni kuglični ležajevi sa kosim dodirom

SL 3204 TRS




Designation/Oznaka	d	d ₁	D	B	C	α	kg
SL 3204 TRS	20	28.8	47	26	26	25°	0.20

5206 KPP3

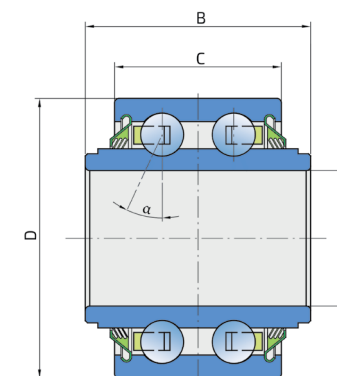

Designation/Oznaka	d	D	B	C	α	kg
5206 KPP3	30.150	62	50	37	25°	0.50


XS 5203.B-2T



Designation/Oznaka	d	D	B	C	α	kg
XS 5203.B-2T	16.26	45.23	27.66	22.8	30°	0.18

Typical Applications:
Potencijalno mesto ugradnje i primena:


Seeding Machines
Sejačice



Four point Contact Ball Bearing


Kuglični ležaj sa dodirom u četiri tačke

06C04-TS
06C04-ZZ
06C04-DS

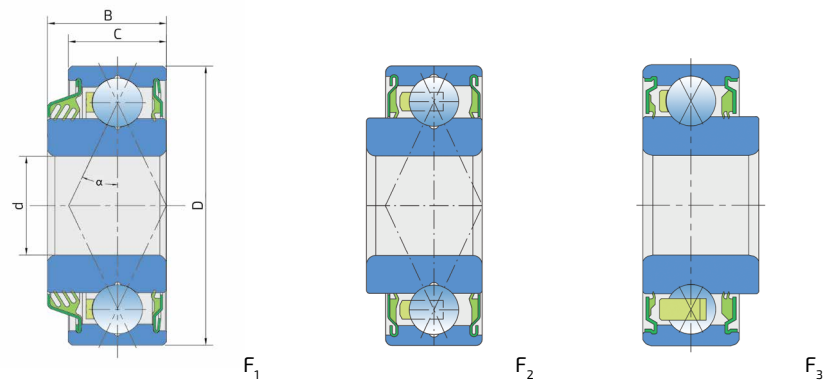

Designation/Oznaka	d	D	B	C	α	kg	Fig./Sl.
06C04-TS	16	45.2	18.67	15.4	25°	0.23	1
06C04-ZZ	16	45.2	18.67	15.4	25°	0.23	2
06C04-DS	16	45.2	18.67	15.4	27.5°	0.23	3


6204-RSL3



Designation/Oznaka	d	D	B	C	kg
6204-RSL3	20	47	16.5	15	0.19

Typical Applications:
Potencijalno mesto ugradnje i primena:


Seeding Machines
Sejačice



Double Row Angular Contact Ball Bearings



Dvoredni kuglični ležajevi sa kosim dodirom

SL 3303



Designation/Oznaka	d	d ₁	D	B	C	α	kg
SL 3303 2S	17	28.5	47	24.2	24.2	25°	0.20
SL 3303-2S-20	20	28.2	47	24.2	24.2	25°	0.18


SL 5203

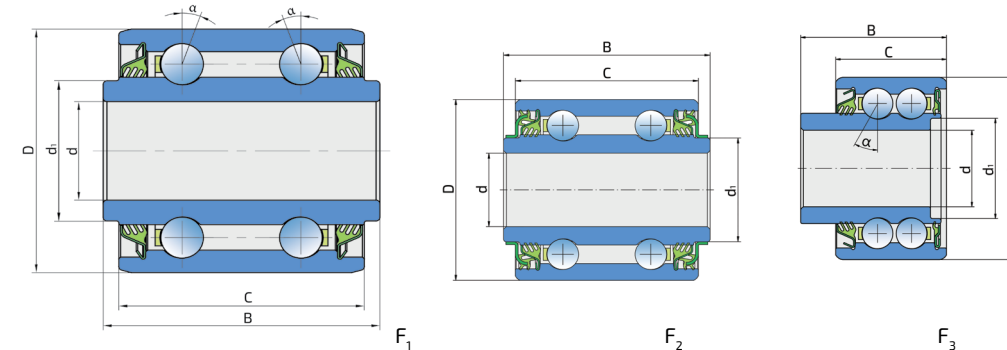

Designation/Oznaka	d	d ₁	D	B	C	H	E	α	kg	Fig./Sl.
SL 5203.B-2T	16.256	23.5	40	44.12	39.12	-	-	30°	0.22	1
SL 5203.B-2T-A	16.256	23	40	43.88	38.93	-	-	20°	0.22	1
SL 5203.B 2TQ	16.256	24.2	40	44.12	39.12	-	-	-	0.22	2
SL 5203/17.B-2T	16.8	23	40	44.12	39.12	-	-	30°	0.22	1
SL 5203 TS	16.8	22	40	32	24.3	-	-	30°	0.14	3

Typical Applications:
Potencijalno mesto ugradnje i primena:


Seeding Machines
Sejačice



Double Row Angular Contact Ball Bearings


Dvoredni kuglični ležajevi sa kosim dodirom

SL 5204
SL 5205 2D

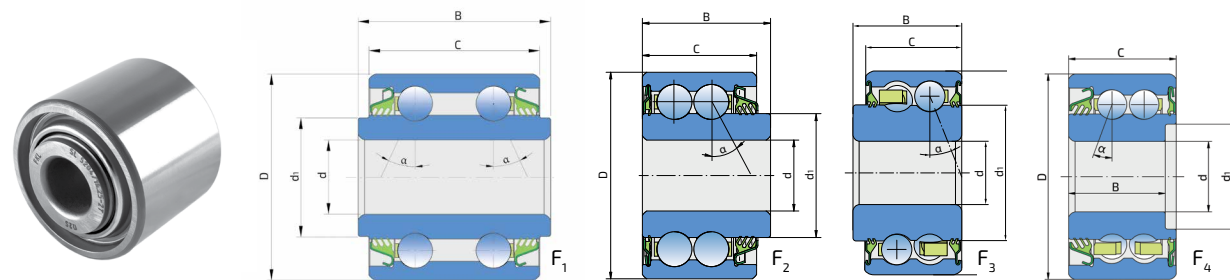



Designation/Oznaka	d	d _i	D	B	C	α	kg	Fig./Sl.
SL 5204 2D	16.027	28.7	45.225	26	22.82	20°	0.19	3
SL 5205 2D	16.027	34.35	52	27.711	24.562	25°	0.29	3
SL 5204 TS	16.1	24	47	22.1	24.6	20°	0.21	4
SL 5204-5T	16.129	28.2	47	29.175	26	25°	0.23	2
SL 5204 2T.C28	16.13	28.1	47	28	28	25°	0.23	1
SL 5204/16.25-2T	16.25	27	47	44	39	25°	0.33	1
SL 5204/20-2T	20	27	47	44	39	25°	0.29	1

SL2 5203.B

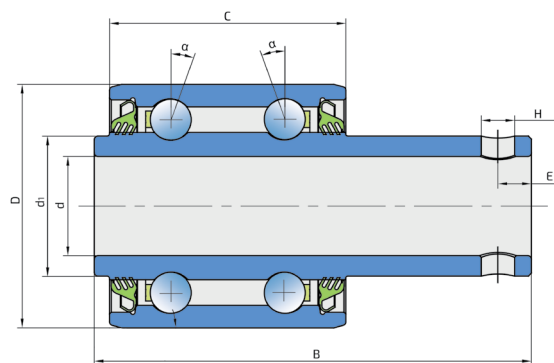

Designation/Oznaka	d	d _i	D	B	C	H	E	α	kg
SL2 5203.B-2T	16.3	23	40	72	39.12	6	5.5	30°	0.27


SL3 5203 2T

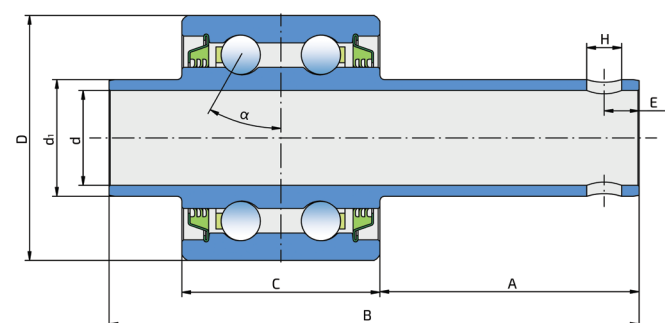

Designation/Oznaka	d	d _i	D	B	C	H	E	α	kg
SL3 5203 2T	16.256	20	42	91	34	6	6	30°	0.26

Typical Applications:
Potencijalno mesto ugradnje i primena:


Seeding Machines
Sejačice



Four Point Contact Ball Bearings


Kuglični ležajevi sa dodirom u četiri tačke

SL 53-014-2T

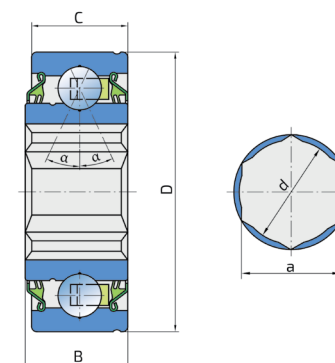

Designation/Oznaka	a	d	D	B	C	α	kg
SL 53-014-2T	22.25	22.80	53.086	19.40	18.288	25°	0.17


SL 5316 2T

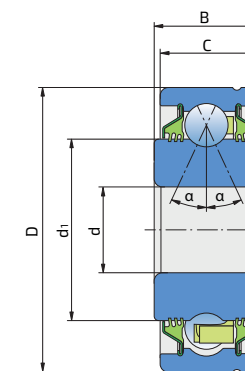

Designation/Oznaka	d	d _i	D	B	C	α	kg
SL 5316 2T	16	33.74	53.086	19.4	18.288	25°	0.21

Typical Applications:
Potencijalno mesto ugradnje i primena:



Seeding Machines
Sejačice



Four Point Contact Ball Bearings


Kuglični ležajevi sa dodirom u četiri tačke

SLE 47-16S-2RS

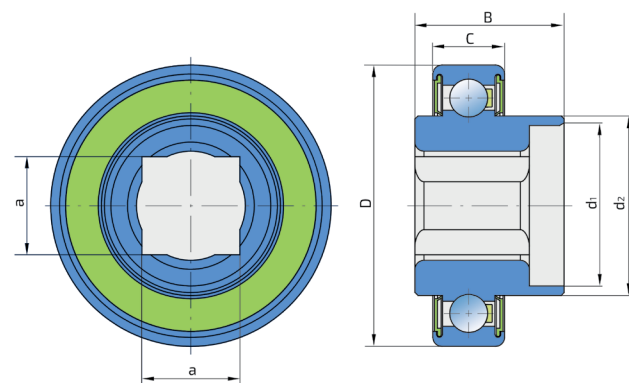


Designation/Oznaka	a	d ₁	d ₂	D	B	C	kg
SLE 47-16S-2RS	16.4	26.8	30	47	25	12	0.11

SLE 53-012-2T

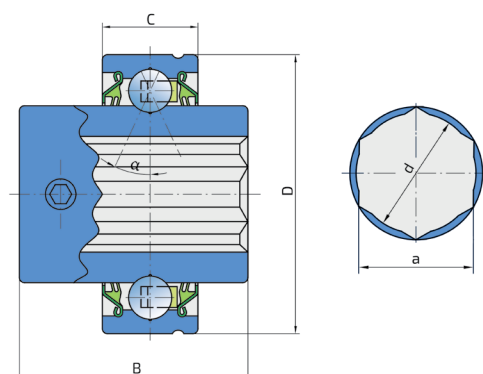

Designation/Oznaka	a	d	D	B	C	α	kg
SLE 53-012-2T	19.18	19.6	53.086	43.5	18.288	25°	0.30


SLU 53-012-2T

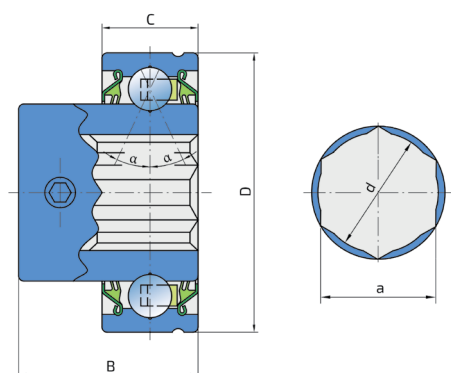

Designation/Oznaka	a	d	D	B	C	α	kg
SLU 53-012-2T	19.18	19.6	53.086	34.2	18.288	25°	0.26

Typical Applications:
 Potencijalno mesto ugradnje i primena:


Seeding Machines
 Sejačice



Ball Bearings


Kuglični ležajevi

206KPP16



Designation/Oznaka	d	D	B	C	kg
206KPP16	19.202	62	24	16	0.31


205KRP2



Designation/Oznaka	d	D	B	C	kg
205KRP2	19.202	52	21.1	15	0.28

Typical Applications:
 Potencijalno mesto ugradnje i primena:


Seeding Machines
 Sejačice



Ball Bearings


Kuglični ležajevi

203KRR.AH02
 203KPP.AH02
 203KRR.AH05
 203KPP.AH05



Designation/Oznaka	d	D	B	C	kg
203KRR.AH02/203KPP.AH02	16.26	40	18.29	12	0.07
203KRR.AH05/203KPP.AH05	13	40	18.29	12	0.09

Q 203PP.AH02
 Q 203PP.AH05
 Q 203PP-CC.AH05

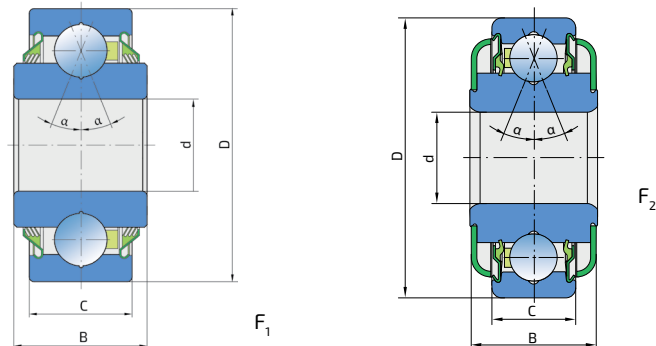

Designation/Oznaka	d	D	B	C	α	kg	Fig./Sl.
Q 203PP.AH02	16.256	40	18.29	12	25°	0.08	1
Q 203PP.AH05	13.081	40	18.29	12	25°	0.09	1
Q 203PP-CC.AH05	13	40	18.3	12	25°	0.09	2


Typical Applications:
 Potencijalno mesto ugradnje i primena:

Seeding Machines/Sejačice
 Sprockets/Lančanic

Ball Bearings

Kuglični ležajevi


203KRR
 204KRR




Designation/Oznaka	d	D	B	C	kg
203KRR	17	40	18.3	12	0.09
204KRR	20	47	17.7	14	0.12

Typical Applications:
 Potencijalno mesto ugradnje i primena:

Seeding Machines
 Sejačice






Bearing Units (Angular contact ball bearings in pressed steel housing)

Ležajne jedinice (Kuglični ležajevi sa kosim dodirom u limenom kućištu)


PL-74XX

PL-75XX

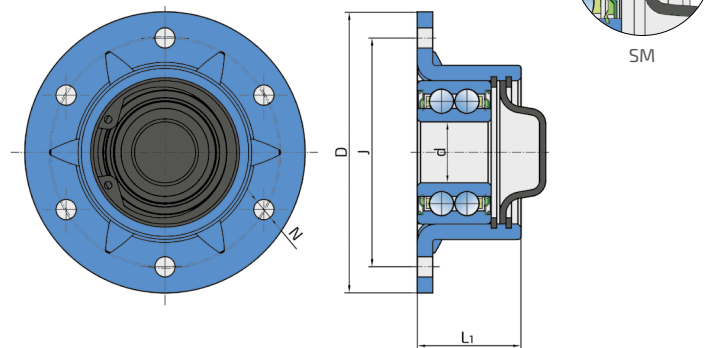

Designation/Oznaka	d	D	J	N	L ₁	kg
PL-7516-SM	16	92	75	6.7	34	0.35
PL-7517	17	92	75	6.7	34	0.51
PL-7517-SM	17	92	75	6.7	34	0.54
PL-7420-SM	20	92	74	9	34	0.52
PL-7520	20	92	75	6.7	34	0.50
PL-7520-SM	20	92	75	6.7	34	0.53

PL90-73/6H-B16

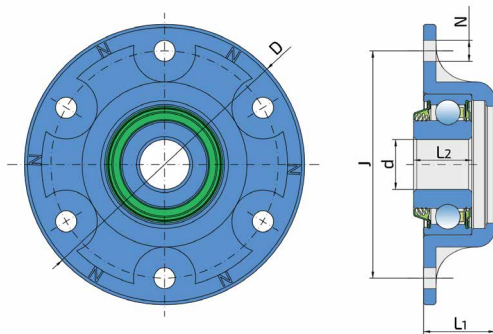


Designation/Oznaka	d	D	J	N	L ₁	L ₂	kg
PL90-73/6H-B16	16	90	73	6.8	23	18.67	0.40

Typical Applications:
Potencijalno mesto ugradnje i primena:

Seeding Machines
Sejačice




Packer Roller Solutions Ležajevi i ležajne jedinice valjka



Bearing Units


Ležajne jedinice

LSQFR 308 TQT.H.T
 LSQFR 308-13.5 TQT.H.T
 LSQFR 308 2TD.H.T

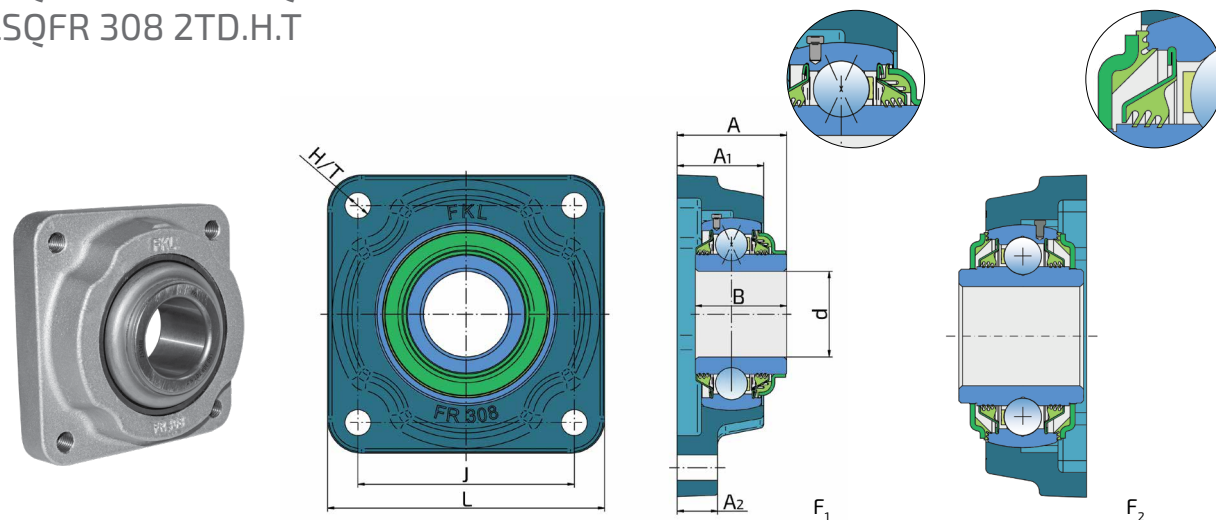

Designation/Oznaka	d	L	J	H/T	A	A ₁	A ₂	B	kg	Fig./Sl.
LSQFR 308 TQT.H.T	40	130	101.5	M12	51.4	40.6	19	42.9	2.41	1
LSQFR 308-13.5 TQT.H.T	40	130	101.5	13.5	51.4	40.6	19	42.9	2.41	1
LSQFR 308 2TD.H.T	40	130	101.5	13	48.4	40.6	19	45.8	2.51	2

LSQFR 309 TQT.H.T
 LSQFR 309-16 TQT.H.T

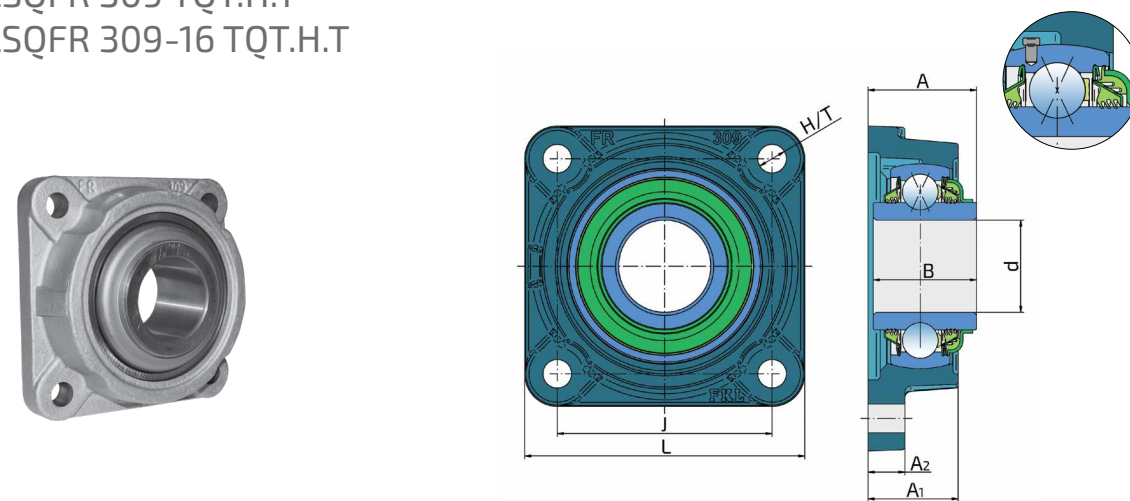

Designation/Oznaka	d	L	J	H/T	A	A ₁	A ₂	B	kg
LSQFR 309 TQT.H.T	45	137	105	14	53	44	18	50.45	3.06
LSQFR 309-16 TQT.H.T	45	137	105	16	53	44	18	50.45	3.06


Typical Applications:
 Potencijalno mesto ugradnje i primena:

Packer Rollers
 Valjci

Bearing Units

Ležajne jedinice

ZGKU 208 2S
 ZGKU 309 2S

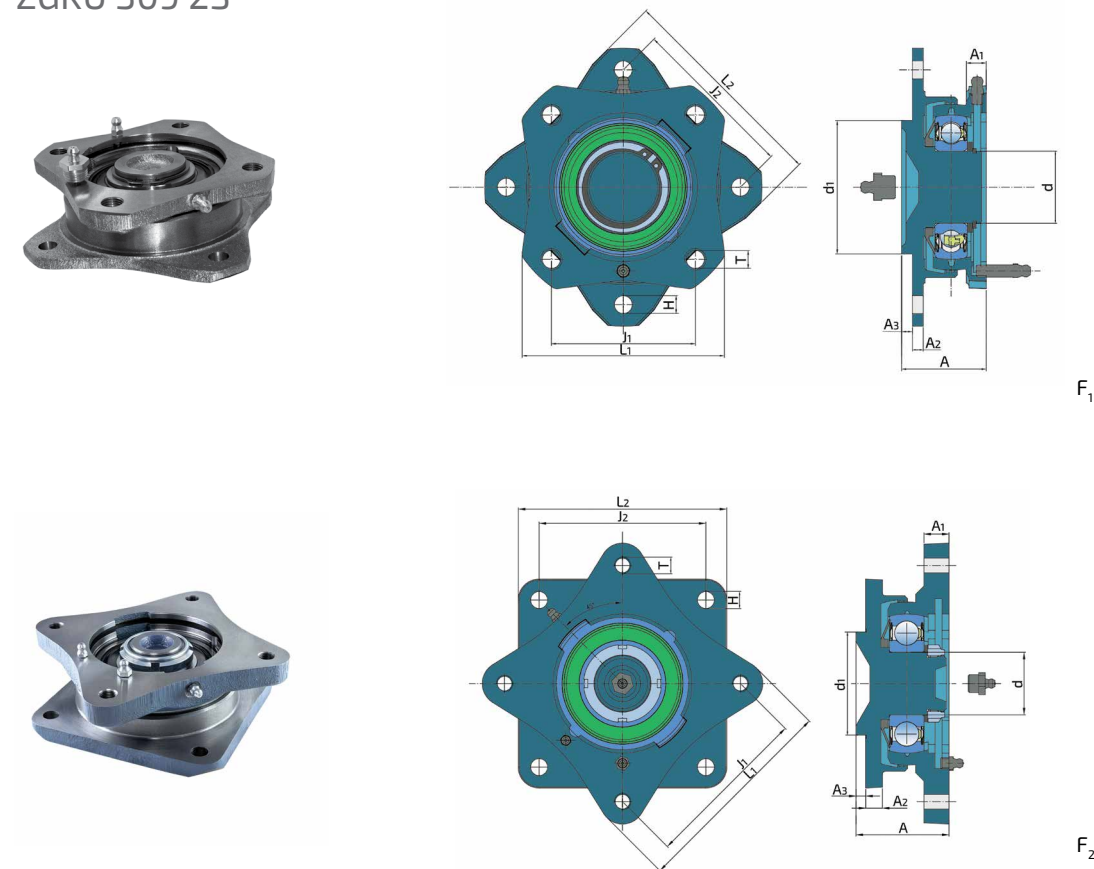

Designation/Oznaka	d	d ₁	L ₁	L ₂	J ₁	J ₂	H	T	A	A ₁	A ₂	A ₃	kg	Fig./Sl.
ZGKU 208 2S	40	74	112.4	120.4	80	92	4x10	4xM12x1.25	47	11	6	6	2.3	1
ZGKU 309 2S	45	74	152	150	120	120	4x12.3	4xM12x1.25	66.9	18	12	7	5.6	2


Typical Applications:
 Potencijalno mesto ugradnje i primena:

Packer Rollers
 Valjci

Bearing Units Ležajne jedinice




LSGR 205 FS

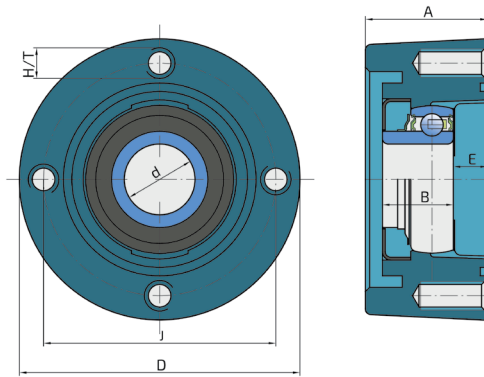


Designation/Oznaka	d	D	J	H/T	A	B	E	kg
LSGR 205 FS	25	99	82	M10	43	25	12	1.55

LSGR 207 TBS


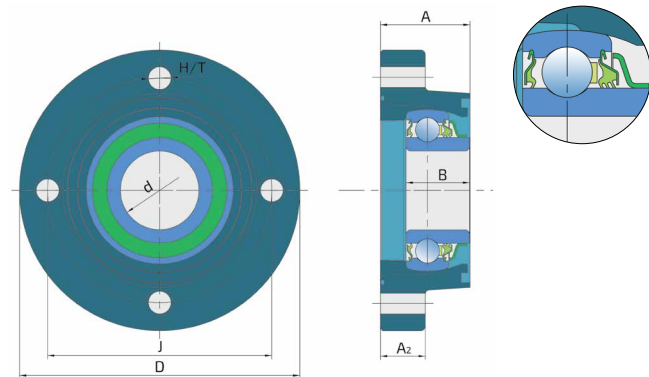


Designation/Oznaka	d	D	J	H/T	A	A ₂	B	kg
LSGR 207 TBS	35	125	100	M12	40	20	28.3	1.70

Bearing Units Ležajne jedinice

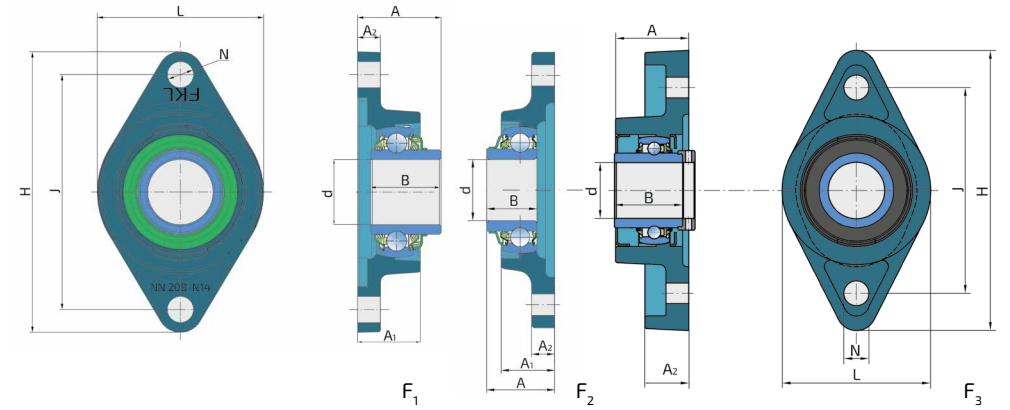
LSNN 208 TDT.H.T*K
LSNR 205 2T
LSNR 207 TBS


Designation/Oznaka	d	H	L	J	A	A ₁	A ₂	B	N	kg	Fig./Sl.
LSNR 205 2T	25	135	71	99	35	-	21	34.8	11	0.91	3
LSNR 207 TBS	35	155	93	130	40	31	13	28.3	14	1.05	2
LSNN 208 TDT.H.T*K	40	172	102	144	51.2	38.5	14	43.2	16	1.78	1

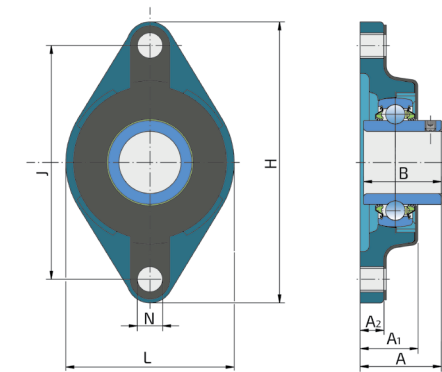LENN 206 2TC.H
LENN 208 2T
LENN 210 2T


Designation/Oznaka	d	H	L	J	N	A	A ₁	A ₂	B	kg
LENN 206 2TC.H	30	148	80	117	16	40.2	30.5	13.5	38.1	1.12
LENN 208 2T	40	175	100	144	14	51.2	36	16	49.2	1.69
LENN 210 2T	50	195	115	157	19	54.6	40	18	51.6	2.13

Typical Applications:
Potencijalno mesto ugradnje i primena:

Packer Rollers
Valjci


Packer Rollers
Valjci

Typical Applications:
Potencijalno mesto ugradnje i primena:

ARMOR Bearing Units

ARMOR ležajne jedinice

LEFG 2XX TDT

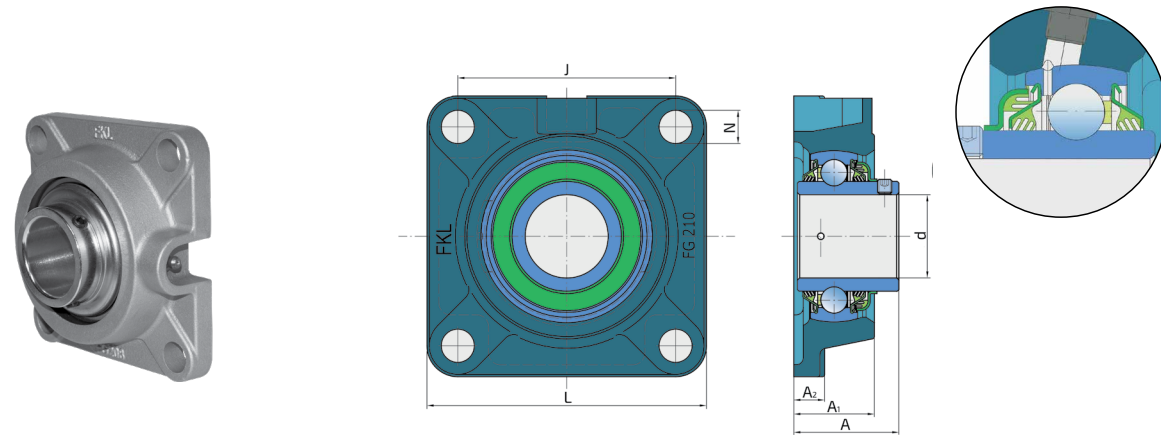

Metric sizes/Metričke veličine

Designation/Oznaka	d	A ₁	A ₂	J	L	N	A	kg
LEFG 206 TDT	30	31	13	83	108	12	40.2	1.20
LEFG 207 TDT	35	34	13	92	118	14	44.4	1.45
LEFG 208 TDT	40	36	14	102	130	16	51.2	1.95
LEFG 209 TDT	45	38	16	105	137	16	52.2	2.41
LEFG 210 TDT	50	40	16	111	143	16	54.6	2.78
LEFG 211 TDT	55	43	17	130	162	19	59.8	3.55
LEFG 212 TDT	60	48	19	143	175	19	68.5	4.64
LEFG 214 TDT	70	50.3	21.3	152	193	19	70.7	6.20

Inches sizes/Inč veličine

Designation/Oznaka	d	A ₁	A ₂	J	L	N	A	kg
LEFG 206-104 TDT	1 1/4"	31	13	83	108	12	40.2	1.10
LEFG 207-104 TDT	1 1/4"	34	13	92	118	14	44.4	1.60
LEFG 207-106 TDT	1 3/8"	34	13	92	118	14	44.4	1.60
LEFG 208-108 TDT	1 1/2"	36	14	102	130	16	51.2	1.95
LEFG 209-112 TDT	1 3/4"	34	16	105	137	16	52.2	2.15
LEFG 211-200 TDT	2"	43	17	130	162	19	59.8	3.55

Specify:
Specifičnosti:


Universal Solutions
Univerzalna rešenja

Housing material: Ductile iron/Materijal kućišta: nodularni liv
Sealing: double triple lip/Zaptivanje: dupla troujna zaptivka
Maintenance free option/Opcija bez podmazivanja

Bearing Units


Ležajne jedinice

LEFPN 208 TDT.C43.7

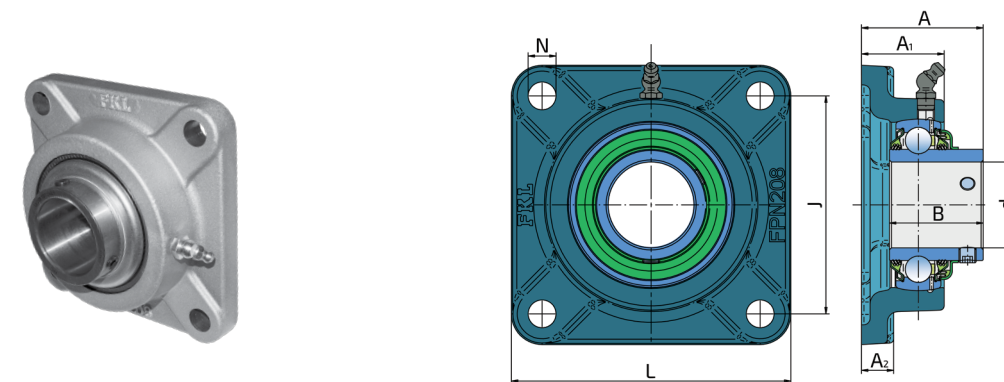

Designation/Oznaka	d	J	L	A	A ₁	A ₂	B	N	kg
LEFPN 208 TDT.C43.7	40	101.6	130.2	56.7	38.5	15	43.7	13	1.91

LSFPN 210 TDT.C38.C3

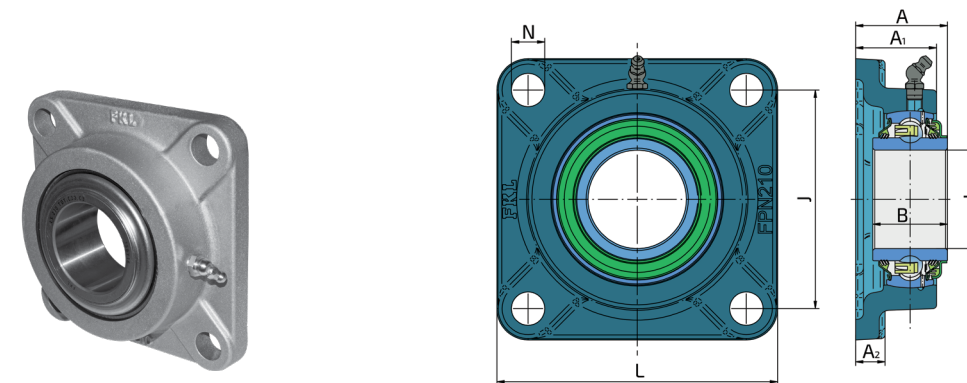

Designation/Oznaka	d	J	L	A	A ₁	A ₂	B	N	kg
LSFPN 210 TDT.C38.C3	50	111	142.9	46.75	41.2	15	38	17	2.35

Typical Applications:
Potencijalno mesto ugradnje i primena:

Packer Rollers
Valjci




Bearing Units
Ležajne jedinice



Packer Roller Solutions
Ležajevi i lež. jedinice valjka

LSQFH 210 2PB.H.40
LSQFH 210 2PB.H

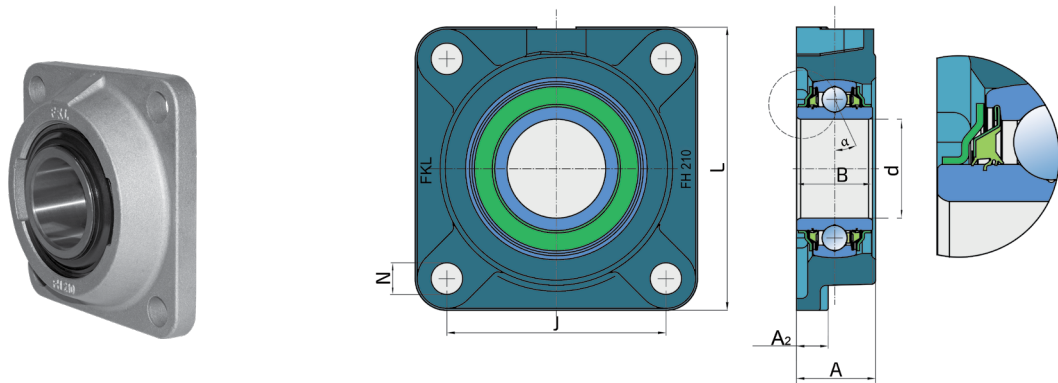


Designation/Oznaka	d	J	L	A	A ₂	B	N	α	kg
LSQFH 210 2PB.H.40	40	111	143	38.5	13	38.4	16	25°	2.60
LSQFH 210 2PB.H	50	111	143	38.5	16	38.4	17	25°	2.65

Bearing Unit
Ležajna jedinica



Packer Roller Solutions
Ležajevi i lež. jedinice valjka

LESQFS 212 2TD.H

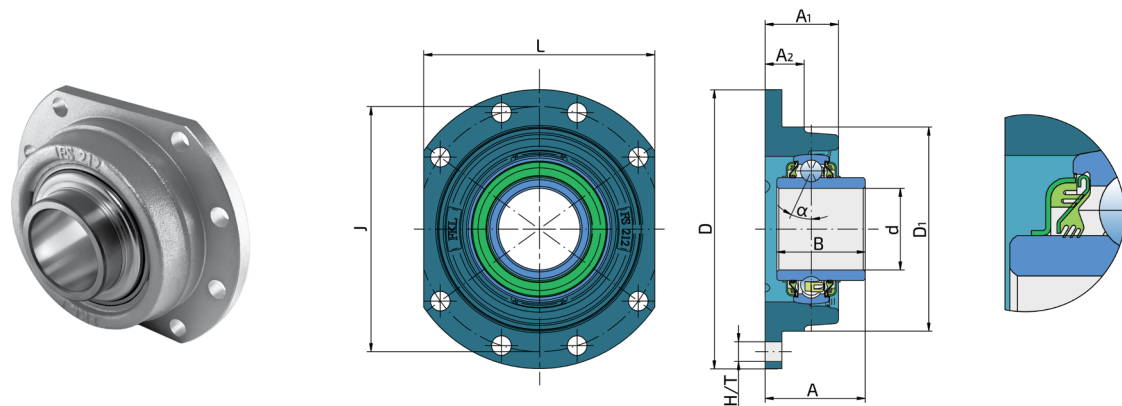

Designation/Oznaka	d	D	D ₁	L	J	H/T	A	A ₁	A ₂	B	α	kg
LESQFS 212 2TD.H	60	205	150	170	180	14.5	73.7	54	28.7	65.1	25°	5.27

Typical Applications:
Potencijalno mesto ugradnje i primena:

Packer Rollers
Valjci

Packer Rollers
Valjci

Note/Napomena
Maintenance free option/Opcija bez podmazivanja


Typical Applications:
Potencijalno mesto ugradnje i primena:

Bearing Units

Ležajne jedinice



LEFN 210 2TB
LEFN 212 2TB
LEFN 212M 2TB

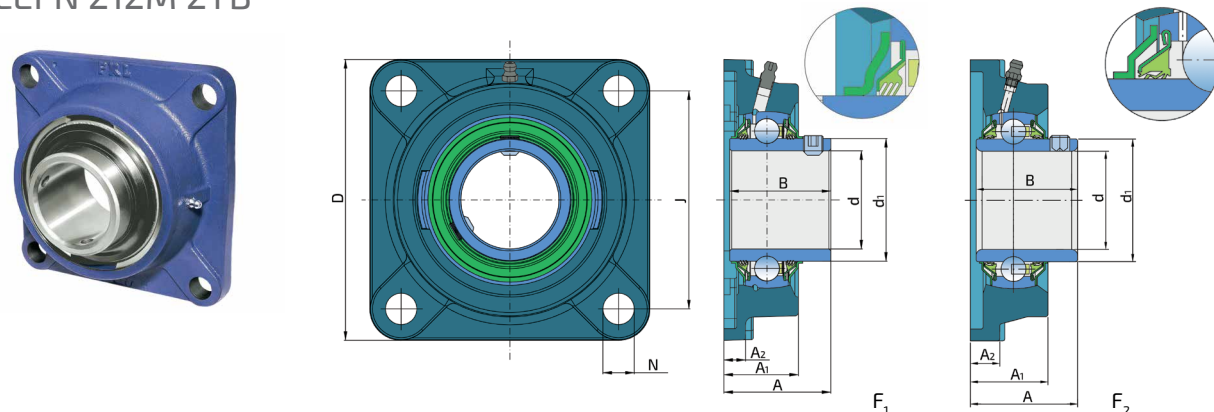



Designation/Oznaka	d	d ₁	L	J	N	A	A ₁	A ₂	B	kg	Fig./Sl.
LEFN 210 2TB	50	62.5	143	111	Ø 16H13	54.6	40	11	51.6	2.6	2
LEFN 212 2TB	60	75.64	175	143	19	68.7	48	15	65.1	4.27	1
LEFN 212M 2TB	60	75.64	175	143	18	73.7	52	17	65.1	4.27	1

Bearing Units

Ležajne jedinice



LEF 205 2TC
LSFN 207 TBS
LEFN 207 2TC
LEFN 208 2TC
LEFN 210 2PC
LEFC 210 2PB

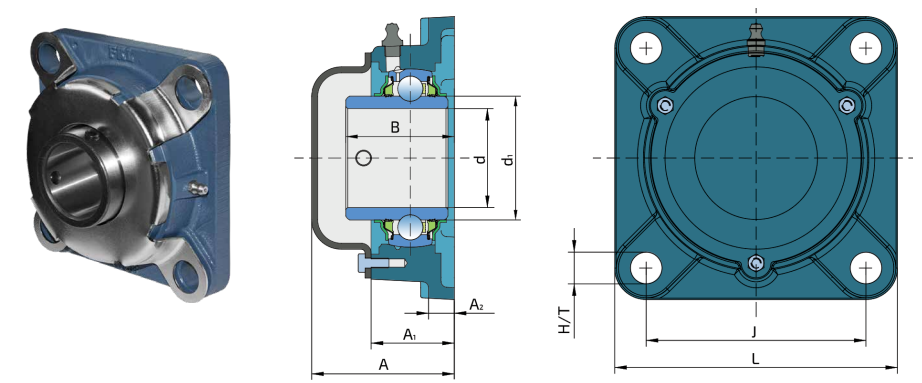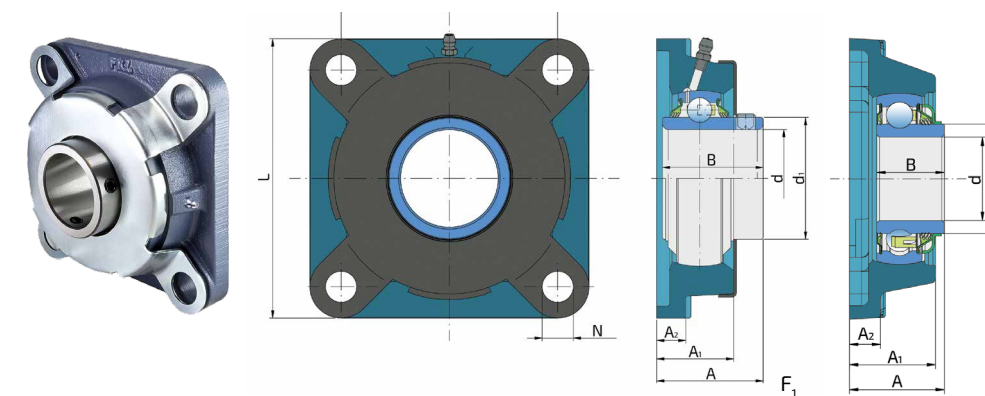

Designation/Oznaka	d	d ₁	L	J	N	A	A ₁	A ₂	B	kg	Fig./Sl.
LEF 205 2TC*	25	33.74	95	70	12	35.8	28.5	12	34.1	0.81	1
LSFN 207 TBS	35	46.1	118	92	14	37.8	34	11	28.3	1.45	2
LEFN 207 2TC	35	46.1	118	92	14	44.4	34	13	42.9	1.47	1
LEFN 208 2TC	40	51.8	130	102	16	51.2	36	14	49.2	2.1	1
LEFN 210 2PC	50	62.5	143	111	16	54.6	38	15	51.6	2.8	1
LEFC 210 2PB	50	62.5	143	111	16	72	42	17	51.6	3.12	3

* Housing material: Gray cast iron/Materijal kućišta: sivi liv

Typical Applications:
Potencijalno mesto ugradnje i primena:




Packer Rollers
Valjci

Note/Napomena
Maintenance free option/Opcija bez podmazivanja

Universal Solutions
Univerzalna rešenja

Sealing: triple lip or five lip/Zaptivanje: troušno ili petousno
Housing material: Ductile iron/Materijal kućišta: nodularni liv
Protective metal sheet and cap/Zaštitni metalni lim i kapa
Maintenance free option/Opcija bez podmazivanja

Specifity:
Specifičnosti:

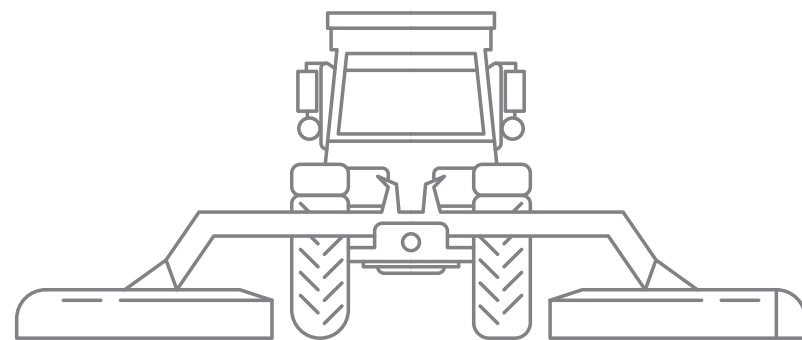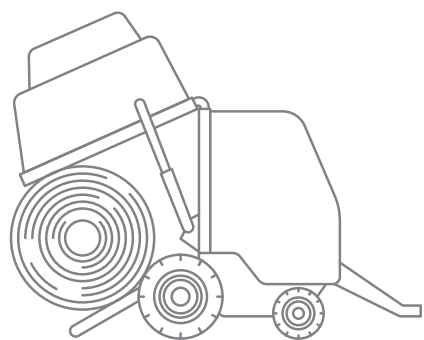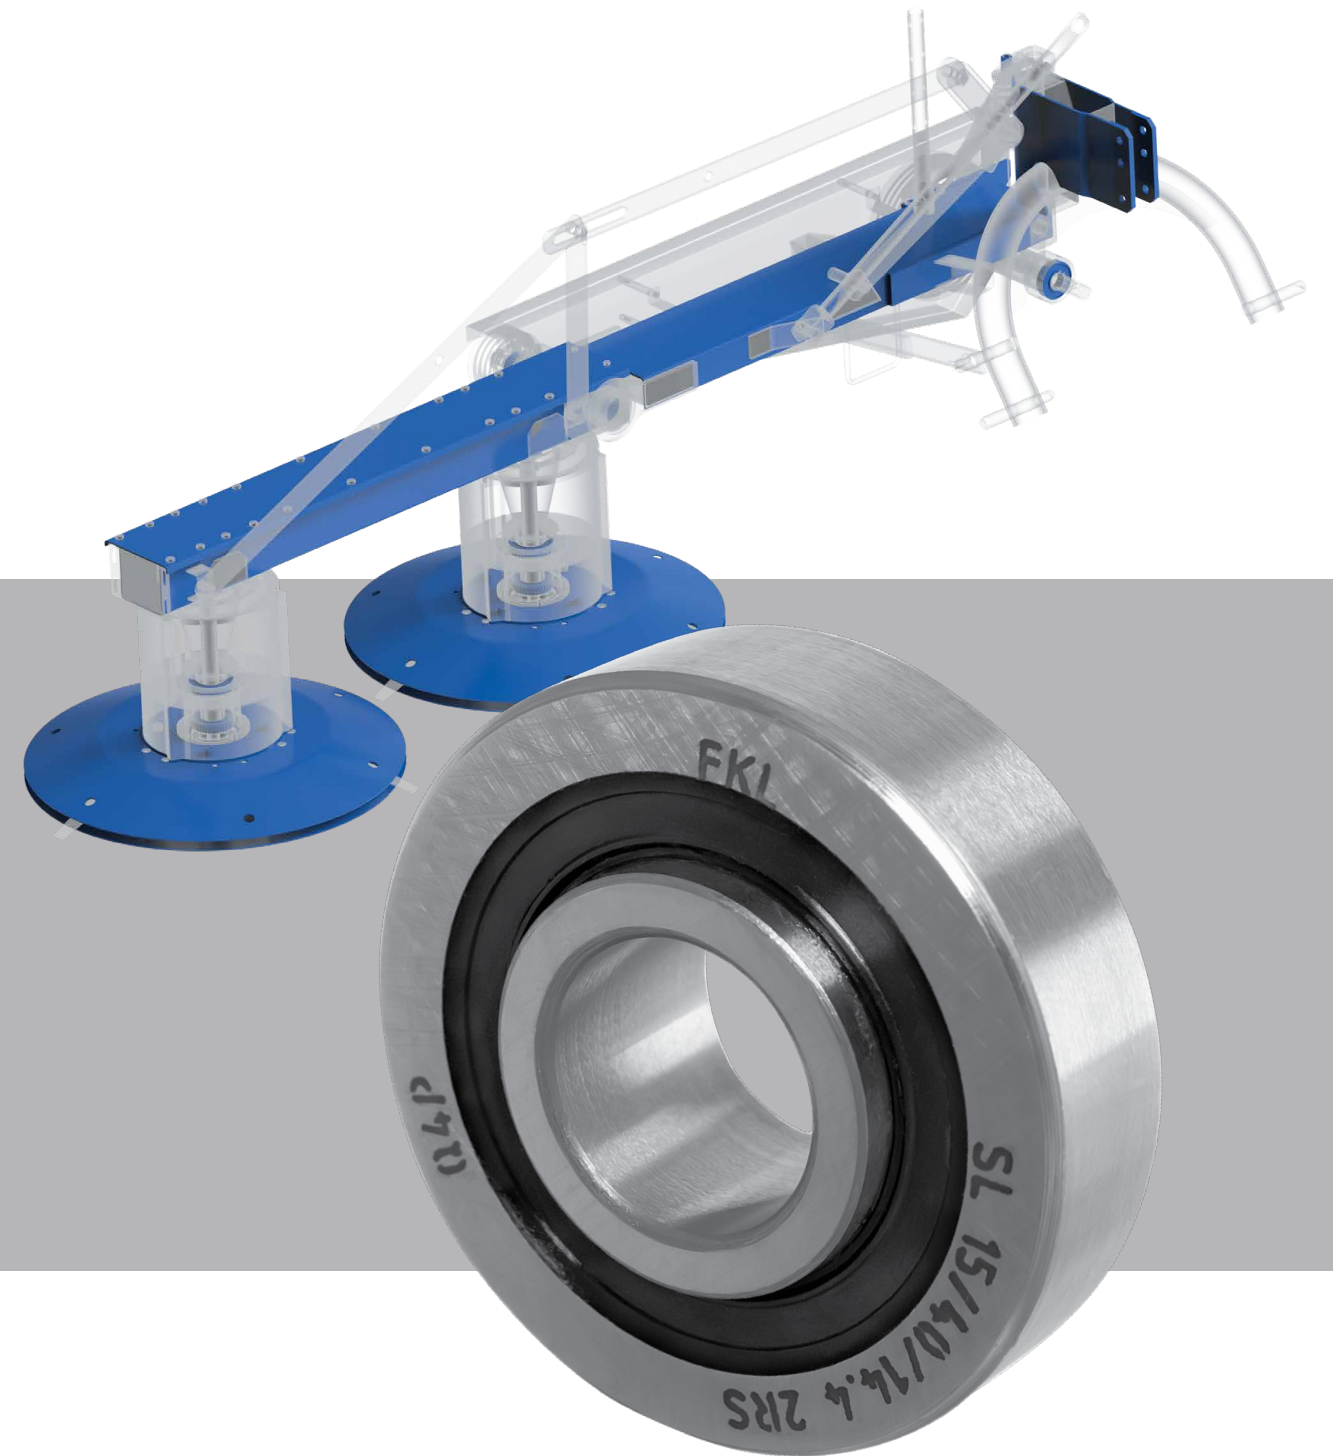


**Packer baler, mowers and
spreaders**

*Ležajevi balirke, kosačice i
rasipača*


Ball Bearings Kuglični ležajevi

206KRR6
207KRRB12
207KRRB17
209KPPB2
209KRRB2
210RRB6

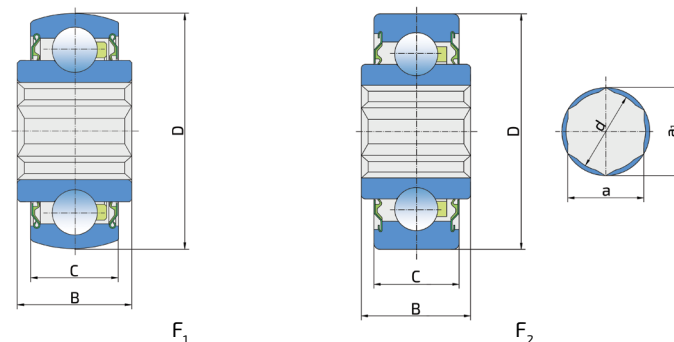

Designation/Oznaka	a	a ₁	d	D	B	C	kg	Fig./SL
206KRR6	25.43	29.26	26	62	24	16	0.34	2
207KRRB12	28.6	33.05	29.3	72	25	17	0.40	1
207KRRB17	31.78	36.46	32.5	72	25	17	0.40	1
209KRRB2	38.12	43.94	39	85	30	19	0.58	1
210RRB6	38.12	43.94	39	90	30	22	0.80	2

205PP13
205PPB13
205KPPB2
206KPP3
207KPPB3
209KPPB2

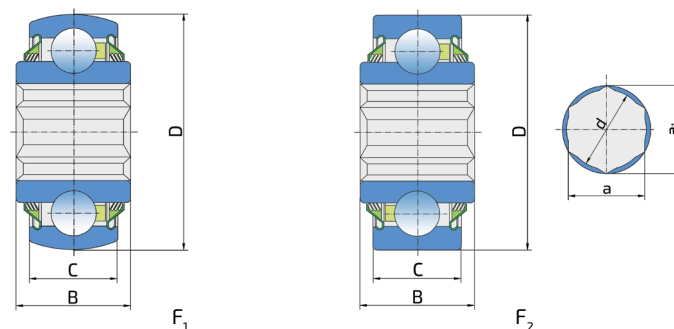



Designation/Oznaka	a	a ₁	d	D	B	C	kg	Fig./SL
205PP13	22.25	25.65	22.8	52	25.4	15	0.20	2
205PPB13	22.25	25.65	22.8	52	25.4	15	0.20	1
205KPPB2	22.25	25.65	22.8	52	25.4	15	0.20	1
206KPP3	25.43	29.26	26	62	24	16	0.40	2
207KPPB3	31.78	36.40	32.5	80	36.5	18	0.40	1
209KPPB2	38.12	43.94	39	85	30	19	0.58	1

Typical Applications:
Potencijalno mesto ugradnje i primena:

Packer Balers
Balirke


Ball Bearings Kuglični ležajevi

LR 35x18x49-19




Designation/Oznaka	d	D	C	L	H	E	kg
LR 35x18x49-19	19	35	18	49	7	15	0.15

LR-35/72



Designation/Oznaka	d	D	B	kg
LR-35/72	35	72	17	0.32

SL 15/40/14.4 2RS

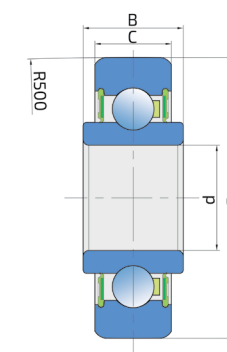


Designation/Oznaka	d	D	B	C	kg
SL 15/40/14.4 2RS	15	40	14.4	11	0.08

Typical Applications:
Potencijalno mesto ugradnje i primena:

Packer baler, mowers and spreaders
Balirke, kosačice i rasipače




Packer baler, mowers and
spreaders
Ležajevi balirke, kosačice i
rasipača



Packer Baler and
Mower Solutions
Ležajevi balirke i kosačice

Double Row Angular Contact Ball Bearings
Dvoredni kuglični ležajevi sa kosim dodirom

BW1-357233

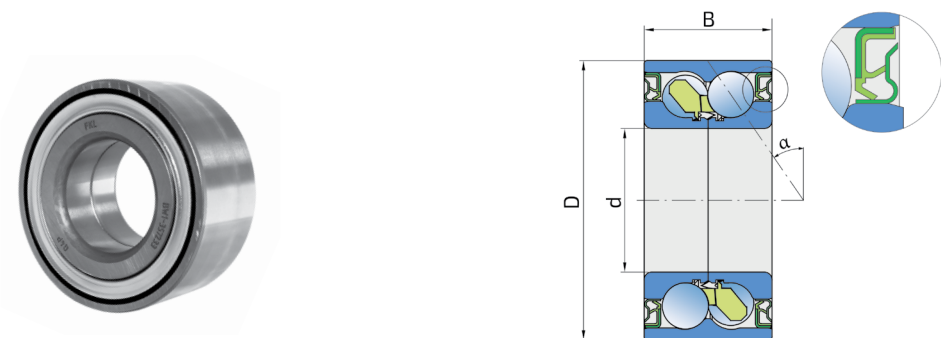

Designation/Oznaka	d	D	B	α	kg
BW1-357233	35	72.043	33	40°	0.55


BW1-457523



Designation/Oznaka	d	D	B	C	α	kg
BW1-457523	45	75	23	15	34°	0.35


Ball Bearings
Kuglični ležajevi

SLE 206-103 2F

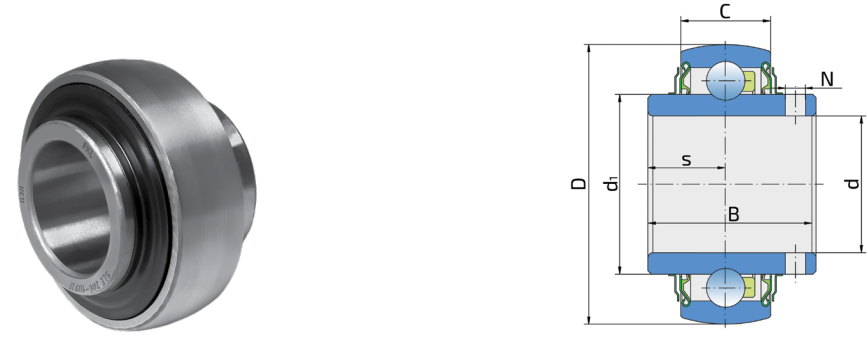


Designation/Oznaka	d	d ₁	D	B	C	s	N	kg
SLE 206-103 2F	30.162	39.7	62	38.1	18	15.9	7	0.28

SL 6209.N

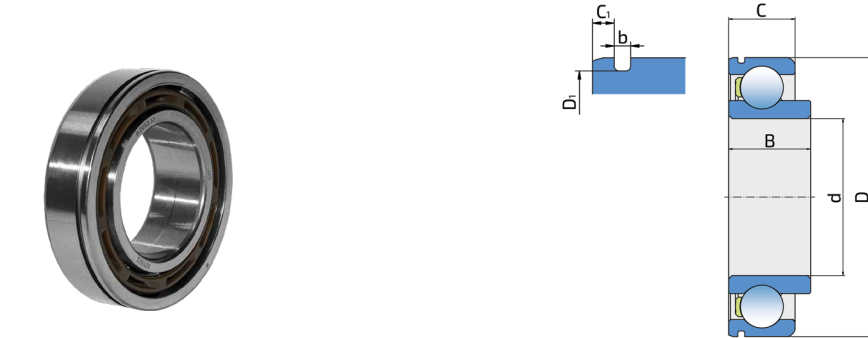

Designation/Oznaka	d	D	B	C	b	C ₁	D ₁	kg
SL 6209.N	45	80	23.45	19	2	2.6	76.8	0.46





Packer Baler and
Mower Solutions
Ležajevi balirke i kosačice

Typical Applications:
Potencijalno mesto ugradnje i primena:

Mowers
Kosačice


Mowers
Kosačice

Typical Applications:
Potencijalno mesto ugradnje i primena:

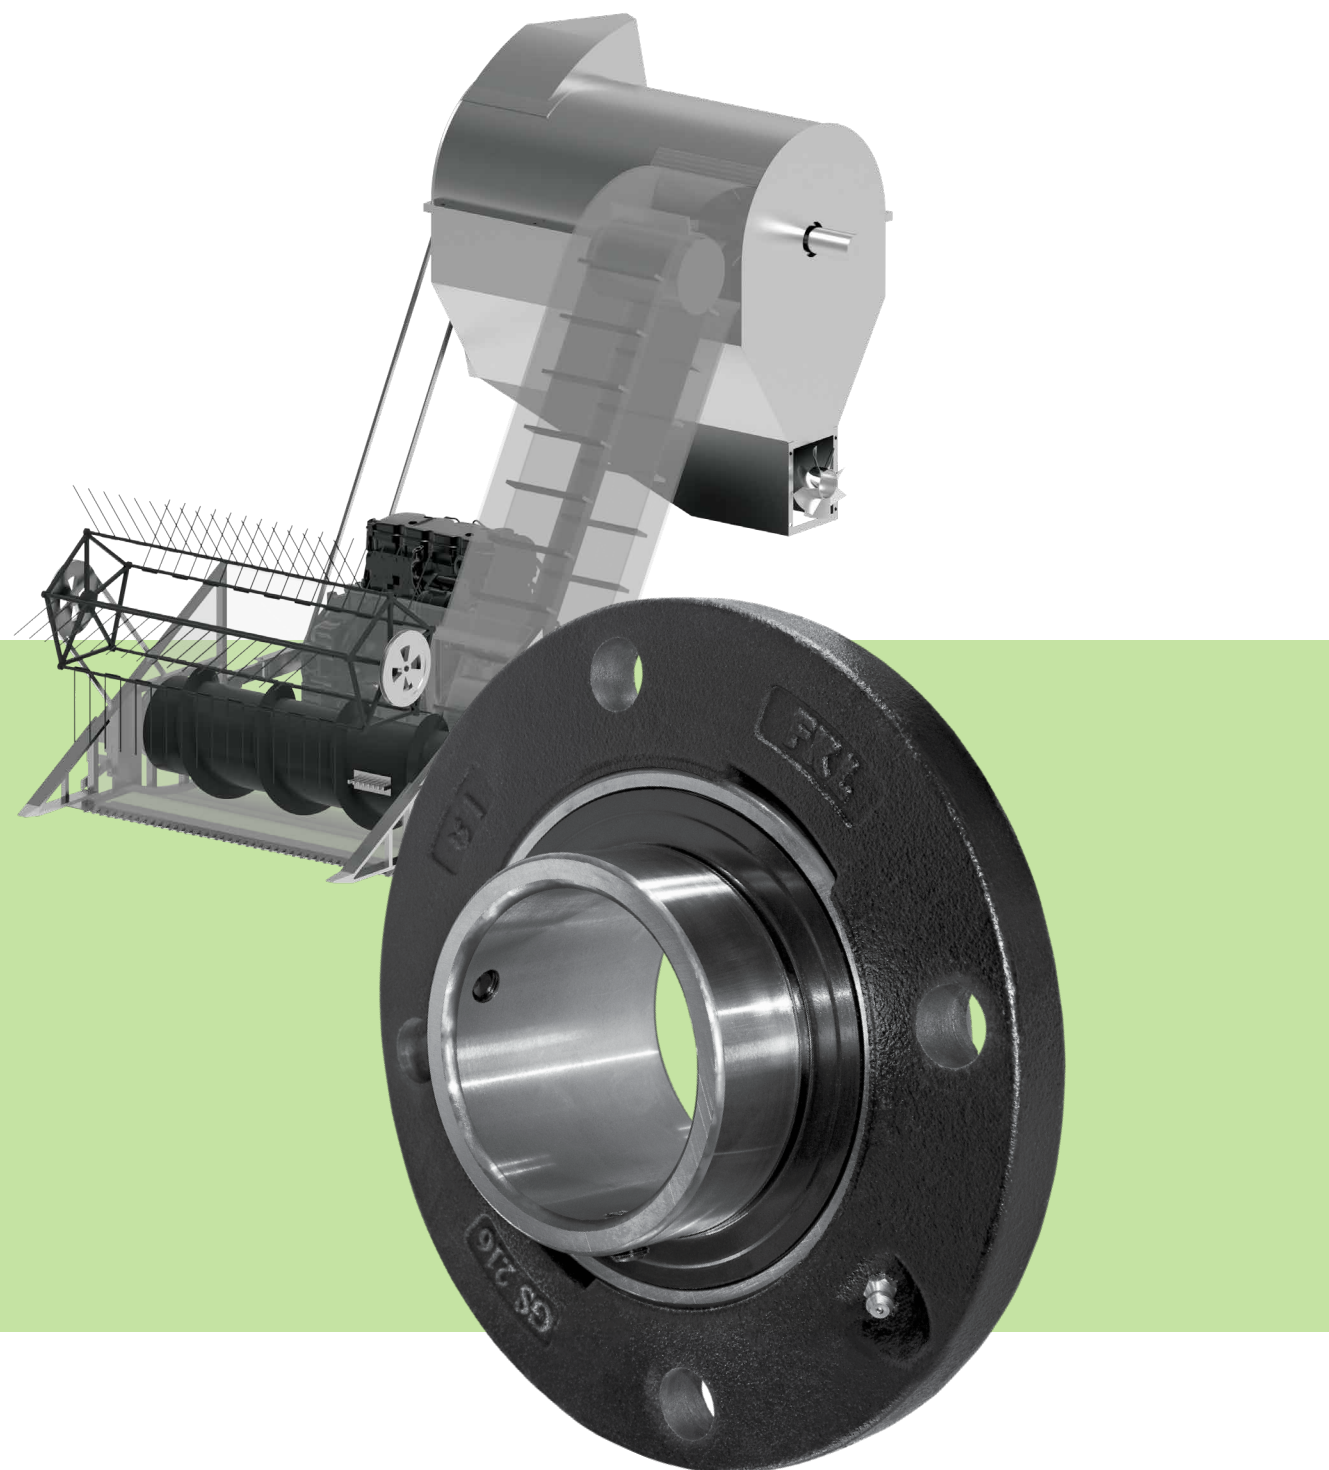

Combine Harvester Solutions


Ležajevi i lež. jedinice kombajna

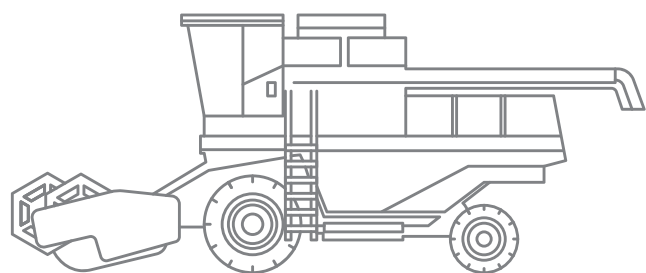

Ball Bearings


Kuglični ležajevi

SL 40/90/36.5





Designation/Oznaka	d	D	B	kg
SL 40/90/36.5	40	90	36.5	1.21

209 KRR K/50.135



Designation/Oznaka	d	D	B	C	kg
209 KRR K/50.135	50.135	81	30	18	0.42

309726



Designation/Oznaka	d	D	B	C	α	kg
309726	34	64	37	37	34	0.43

Typical Applications:
 Potencijalno mesto ugradnje i primena:


Harvesters
 Kombajni



Ball Bearings
Kuglični ležajevi


Combine Harvester Solutions
Ležajevi i lež. jed. kombajna

G207 KPP3 AH16

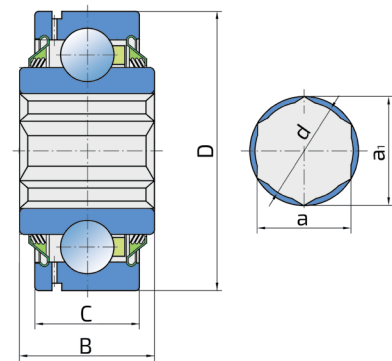



Designation/Oznaka	a	a ₁	d	D	B	C	kg
G207 KPP3 AH16	31.78	36.45	32.5	72	38	19	0.65

LR 35/72/17/25-2T

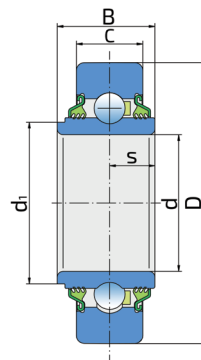

Designation/Oznaka	d	d ₁	D	B	C	s	kg
LR 35/72/17/25-2T	35	41.4	72	25	17	11.6	0.36


SLQ 47x17.6x20.9-2D

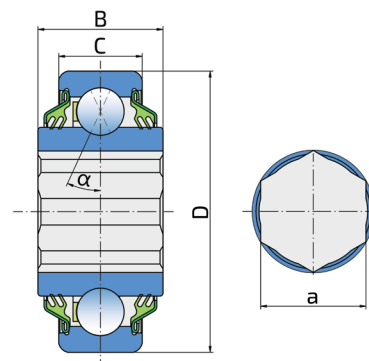

Designation/Oznaka	a	D	B	C	α	kg
SLQ 47x17.6x20.9-2D	17.653	47	20.955	14	25°	0.13

Typical Applications:
Potencijalno mesto ugradnje i primena:



Harvesters
Kombajni



Ball Bearings
Kuglični ležajevi


Combine Harvester Solutions
Ležajevi i lež. jed. kombajna

W215KPP52

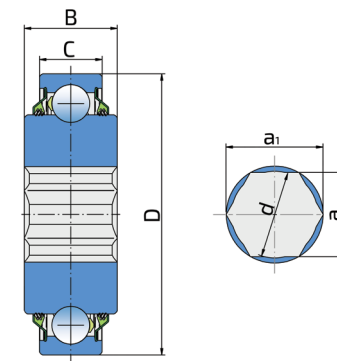



Designation/Oznaka	a	a ₁	d	D	B	C	kg
W215KPP52	38.25	44	39.35	130	43	29	2.65

W312KPP51

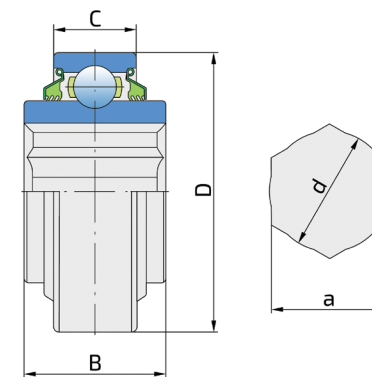

Designation/Oznaka	a	d	D	B	C	kg
W312KPP51	44.6	45.75	130	48	33	0.95

6208.N2.C3



Designation/Oznaka	d	D	B	b	C ₁	D ₁	kg
6208.N2.C3	40	80	18	2.2	2	78.2	0.37

Typical Applications:
Potencijalno mesto ugradnje i primena:

Harvesters
Kombajni


Ball Bearings

Kuglični ležajevi



Y-bearings with eccentric locking collar (LY)

Y-kuglični ležajevi sa ekscentrom za pritezanje (LY)

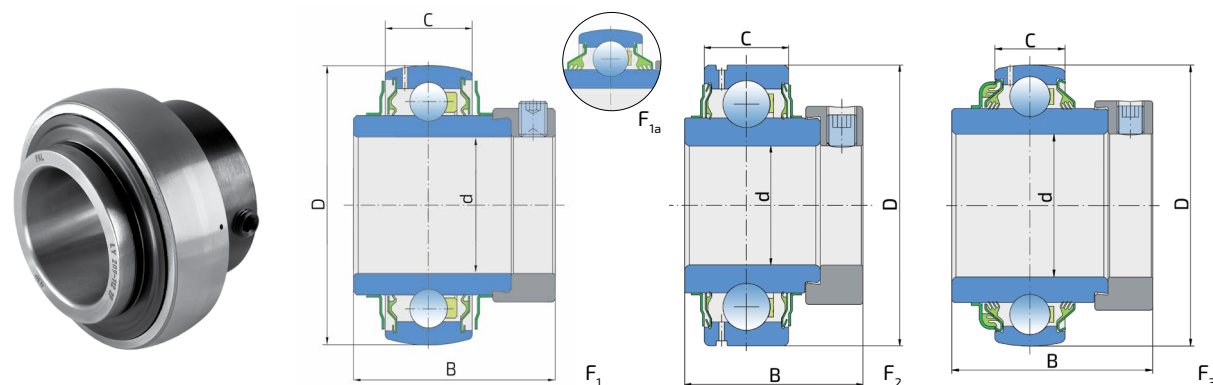


Designation/Oznaka	d	D	B	C	kg	Fig./Sl.
LY 205-100 2F	25.4	52	44.4	15	0.25	1
LY 205-100 2T.H	25.4	52	44.4	15	0.23	1a
LY 206-104 2F	31.75	62	48.4	18	0.21	1
LY 207-104 2F	31.75	72	51.1	19	0.61	1
LY 207-106 2F	34.925	72	51.1	19	0.57	1
LY 207-107 2F	36.512	72	51.1	20	0.61	1
LY 208-108 2F	38.1	80	56.3	21	0.80	1
LY 208-108 2F.SH	38.1	80	56.3	21	0.80	1
LY 308-108 2F.SL	38.1	90	57.1	27	1.16	2
LY 308 2T.H	40	90	57.1	27	1.07	1a
LY 208 2T.H	40	80	56.3	21	0.67	1a
LY 209-112 2F	44.45	85	56.3	22	0.76	1
LY 211-200 2F	50.8	100	71.4	25	1.40	1
LY 211-200 TDT	50.8	100	71.4	25	1.50	3

Typical Applications:
Potencijalno mesto ugradnje i primena:

Harvesters
Kombajni


Ball Bearings

Kuglični ležajevi



Y-bearings with eccentric locking collar (UY)

Y-kuglični ležajevi sa ekscentrom za pritezanje (UY)

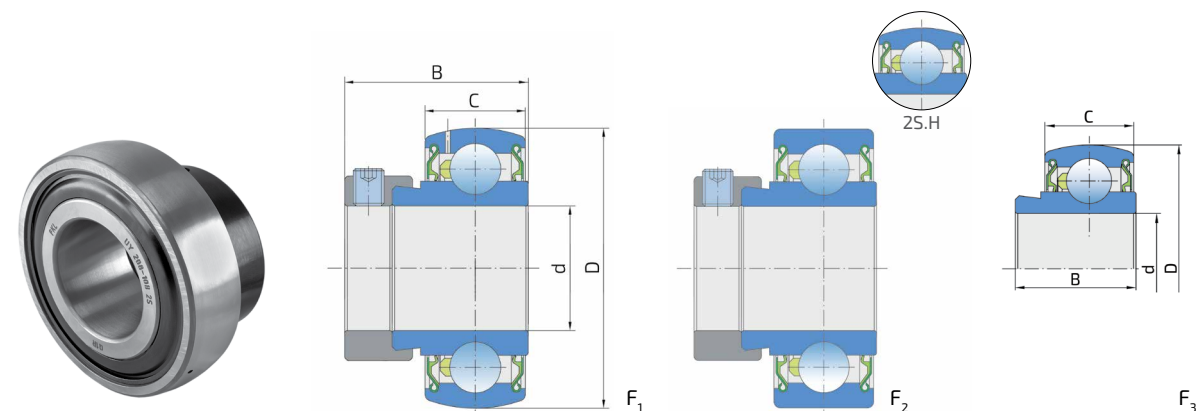


Designation/Oznaka	d	D	B	C	kg	Fig./Sl.
UY 203/15 2S	15	40	28.6	12	0.15	1
UY 204 2S.SH	20	47	31	14	0.19	2
UY 204-012 2S	19.05	47	31	14	0.19	1
UY 204-012 2S.SH	19.05	47	31	14	0.19	2
UY 205-014 2S	22.225	52	31	15	0.20	1
UY 205-100 2S	25.4	52	31	15	0.20	1
UY 205-100 2S.H	25.4	52	31	15	0.20	1
UY 206-102 2S.H.U	28.575	62	23.8	18	0.33	3
UY 206-103 2S.SHY	30.162	62	35.7	18	0.31	2
UY 206-104 2S	31.75	62	35.7	16	0.27	1
UY 206-104 2S.H	31.75	62	35.7	16	0.27	1
UY 207-104 2S	31.75	72	38.9	19	0.48	1
UY 207-106 2S	34.925	72	38.9	19	0.48	1
UY 207-102 2S.SH	34.925	72	38.9	19	0.48	2
UY 207 2S.SH	35	72	38.9	19	0.31	2
UY 208-108 2S	38.1	80	43.7	21	0.63	1
UY 209-112 2S	44.45	85	43.7	22	0.65	1

Typical Applications:
Potencijalno mesto ugradnje i primena:

Harvesters
Kombajni


Ball Bearings Kuglični ležajevi

204KRRB2
204KRR2
205KRRB2
205KRR2
206KRRB6
207KRR
207KRRB9

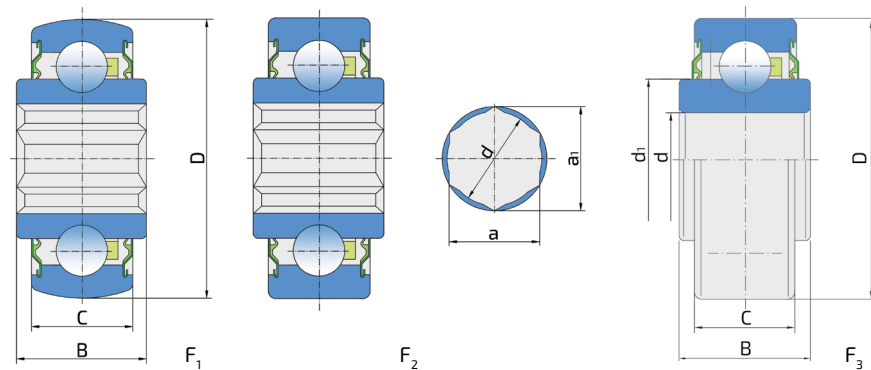

Designation/Oznaka	a	a ₁	d	d ₁	D	B	C	kg	Fig./Sl.
204KRRB2	17.65	20.24	18.2	28.2	47	20.96	14	0.15	1
204KRR2	17.65	20.24	18.2	28.2	47	20.96	14	0.15	2
205KRRB2	22.25	25.65	22.8	33.74	52	25.4	15	0.2	1
205KRR2	22.25	25.65	22.8	33.74	52	25.4	15	0.2	2
206KRRB6	25.43	29.26	26	39.7	62	24	16	0.34	1
207KRR	-	-	35	46.1	72	25	17	0.35	3
207KRRB9	28.6	32.95	29.3	46.1	72	37.7	17	0.51	1

207KPPB31.C25

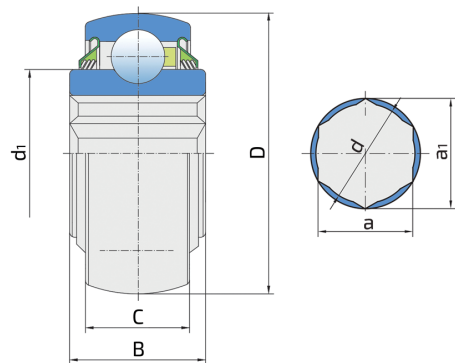


Designation/Oznaka	a	a ₁	d	d ₁	D	B	C	kg
207KPPB31.C25	31.78	37.8	32.4	46.1	72	25	19	0.37

Typical Applications:
Potencijalno mesto ugradnje i primena:

Harvesters
Kombajni


Bearing Units with GS type housing Ležajne jedinice sa kućištem tipa GS

LEGS 208 2F.H
LEGS 211 2F.H
LEGS 214 2F
LEGS 215 2F.C77.8
LEGS 216 2F.C82.6

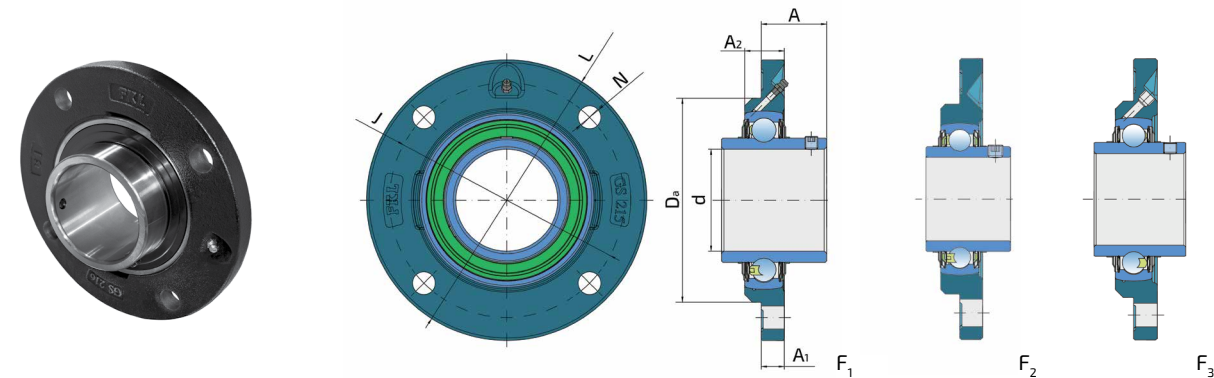

Designation/Oznaka	d	A	A ₁	A ₂	D _a	L	J	N	kg	Fig./Sl.
LEGS 208 2F.H	40	29.2	11.5	23	100	145	120	11.5	1.66	2
LEGS 211 2F.H	55	33.4	15	27.5	125	185	150	18	3.07	2
LEGS 214 2F	69.9	39.7	18	32	150	215	177	18	4.89	3
LEGS 215 2F.C77.8	75	44.5	18	32	160	220	184	18	5.45	1
LEGS 216 2F.C82.6	80	51.3	18	31	160	220	184	18	5.31	1


LYGS 308 2F

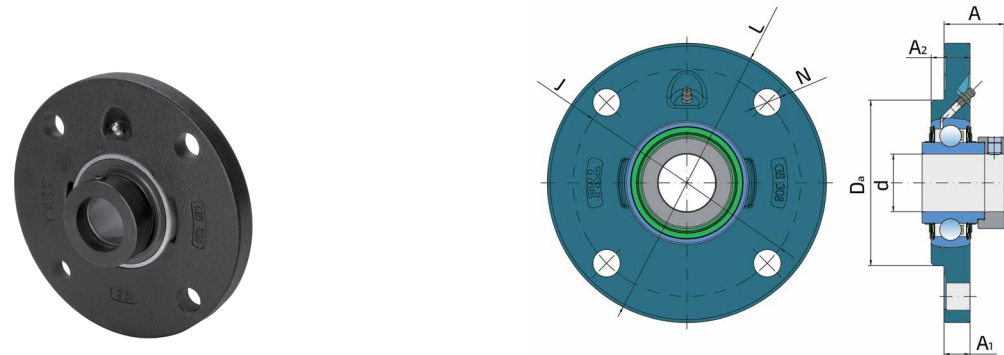

Designation/Oznaka	d	A	A ₁	A ₂	D _a	L	J	N	kg
LYGS 308 2F	40	41.9	18	27	115	194	158	19	3.72

Typical Applications:
Potencijalno mesto ugradnje i primena:

Harvesters
Kombajni



Foreign Markets

Inostrana tržišta

FKL CZECH S.R.O.
Czech Republic/Slovakia, Kroměříž
Tel: +420 573 33 68 60
www.fkl-czech.cz

FKL DEUTSCHLAND GMBH
Germany, Heckelberg-Brunow
Tel: +49 33451 55 57 99
www.fkl-deutschland.de

FKL HUNGARY KFT
Hungary, Debrecen
Tel: +36 70 365 8187
www.fklhungary.hu

FKL IBERICA Bearings S.L.
Spain/Portugal, Lugo
Tel: +34 982 20 90 33
www.fkl-iberica.com

FKL POLSKA SP.Z.O.O.SP.K.
Poland/Baltic States, Kuślin
Tel: + 48 605 48 68 78
www.fkl-polska.pl

FKL ROMANIA SRL
Romania/Moldova, Bragadiru
Tel: +40 374 64 02 27
www.fklromania.ro

FKL UKRAINE LTD
Ukraine, Luts'k
Tel: +38 332 77 43 99
www.fkl.ua

AGRIPARTNER - GANAYE SARL
France, Beaumont
Tel: +33 05 49 85 50 22
www.agripartner.fr

APPLIED INDUSTRIAL TECHNOLOGIES PTY LTD
Australia, Oakleigh
Tel: +61 3 9567 8700
www.appliedau.com.au

AS MODUATOR
Estonia, Põltsamaa
Tel: + 372 776 86 53
www.moduator.ee

ABD GROUP
New Zealand, Auckland
Tel: +64 9 444 65 66
www.abdgroup.co.nz

PROAG PRODUCTS LTD
New Zealand, Auckland
Tel: +64 6 323 4670
www.proagproducts.co.nz

COMERCIAL RODAPLUS SPA
Chile, Osorno
Tel: +56 9 5699 1755
comercialrodaplus@gmail.com

DB-RAZVITAK
Montenegro, Podgorica
Tel: + 382 69 464 888
www.dbrazvitak.me

EKOAL OOD
Bulgaria, Razgrad
Tel: +359 84 66 08 71
www.ekoalbg.com

TIVI GROUP INDUSTRY LTD
Bulgaria, Dimitrovgrad
Tel: +359 391 61 561
www.tivigroup.com

ELIT-TEHNICA SRL
Moldova, Chişinău
Tel: +373 22 855 711
sale@elit-tehnica.md

SRL ROMANCIUC ROMA SI CO
Moldova, Sîngerei
Tel: +373 69 16 83 82
romanciuci@mail.ru

FINNBEARING OY
Finland, Lohja
Tel: +358 40 900 2675
www.finnbearing.fi

HABIB DJAROUEH LTD
Syria/Lebanon/UAE/Saudi Arabia, Aleppo
Tel: +963 21 22 55 555
www.djaroueh-group.com

IQPARTS BEYNE GMBH
Austria, St. Barbara im Mürztal
Tel: +43 3858 6055
www.iqparts.com

IQPARTS BEYNE NV
Belgium/Netherlands/Luxembourg
Tel: +32 473864070
fklbenelux@beyne.com

LAUDORTS SIA
Latvia, Riga
Tel: +371 20 52 15 59
www.laudorts.lv

MET EUROPA SRL
Italy, Argelato
Tel: +39 51 66 30 741
www.meteuropa.com

PNS TECH
Canada, Saint-Agapit
Tel: +1 418 888 5200
www.pnstech.ca

PO BEARINGS S.R.O.
Slovakia, Prešov
Tel: +421 51 74 950 86
www.loziska-bearings.sk

SE-KRA DOO
Croatia, Sesvetski Kraljevec
Tel: +385 01 204 80 23
www.se-kra.hr

SFERODYNAMIKI PC
Greece, Thessaloniki
Tel: +30 231 052 19 66
www.sfair.gr

SISA OTOMOTIV DIS TICARET LTD
Turkey/Iraq, Izmir
Tel: +90 232 375 22 81
sisadis.tic@superonline.com

TEMKO DOO
North Macedonia, Skoplje
Tel: +389 2 3066 068
goran.temko@gmail.com

TEMO PARTS
South Africa, Boksburg North
Tel: +27 10 023 8781
www.temoparts.co.za

UAB IGNERA
Lithuania, Kaunas
Tel: +370 37 35 35 15
www.ignera.lt

VULIN DOO
Bosnia and Herzegovina, Bijeljina
Tel: +387 55 49 03 40
vulindoo@yahoo.com

WEARPARTS TILLAGE TOOLS LLC
USA, Gothenburg
Tel: +1 888 425 2337
www.wearpartsllc.com

Domestic Market

Domaće tržište

MIKRON DOO
Serbia, Sirig
Tel: +381 21 849 538
www.mikron-doo.rs

DB-RAZVITAK DOO
Serbia, Veternik
Tel: +381 21 895 072
www.dbrazvitak.rs

NEPTUN DOO
Serbia, Temerin
Tel: +381 21 84 62 55
www.neptundoo.rs

TENEJ DOO
Serbia, Beograd
Tel: +381 11 74 65 655
www.tenej.com

AGROL DOO
Serbia, Temerin
Tel: +381 21 842 365
www.agrol.rs

AGROMARKET DOO
Serbia, Veternik
Tel: +381 21 82 34 24
www.agromarket021.com

JUSEL DOO
Serbia, Šabac
Tel: +381 15 30 00 00
www.jusel.com



Železnička 1G
21235 Temerin
SERBIA

Sales Director +381 21 6841 222
Head of Sales +381 21 6841 190

Foreign Markets +381 21 6841 205
+381 21 6841 188

Domestic Market +381 21 6841 187

Marketing +381 21 6841 201

sales@fkl-serbia.com
prodaja@fkl-serbia.com
marketing@fkl-serbia.com

www.fkl-serbia.com

Železnička 1G
21235 Temerin
SRBIJA

Direktor prodaje +381 21 6841 222
Šef prodaje +381 21 6841 190

Inostrana tržišta +381 21 6841 205
+381 21 6841 188

Domaće tržište +381 21 6841 187

Marketing +381 21 6841 201

